

45 W AF POWER AMPLIFIER

DESCRIPTION

The μ PC2500A is an audio power amplifier in a 12-lead single in-line package, specifically designed for car stereo applications.

Typically it provides output power of 45 W at 14.4 V or 40 W at 13.2 V to a 2 Ω load.

This IC can be used without output capacitors, because its two output terminals have the same potential and it includes original short circuit protection function which protects internal output power transistors and a speaker at the same time when one output terminal is shorted to ground or V_{CC} .

FEATURES

- Internal stand-by switch circuit; CMOS drive possible.
- Can be used as OCL connection.
- Very low output offset voltage : $V_{offset} = 150$ mV (MAX.)
- High output power : $P_O = 45$ W (TYP.) @ $R_L = 2 \Omega$, $V_{CC} = 14.4$ V, THD = 10 %
 $P_O = 40$ W (TYP.) @ $R_L = 2 \Omega$, $V_{CC} = 13.2$ V, THD = 10 %
- Very low distortion : THD = 0.03 % (TYP.) @ $R_L = 2 \Omega$, $V_{CC} = 13.2$ V, $P_O = 8$ W, $f = 1$ kHz
- Following protection circuits are included.
 - (1) Load dump voltage surge protection circuit.
 - (2) Thermal shut down protection circuit.
 - (3) Output terminal short circuit protection circuit. (V_{CC} to OUT, OUT to GND, OUT to OUT)
 - (4) Loudspeaker protection circuit.


ORDERING INFORMATION

| PART NUMBER | PACKAGE | QUALITY GRADE |
|----------------|------------------------------|---------------|
| μ PC2500AH | 12 PIN PLASTIC POWER SIP (L) | Standard |

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

The information in this document is subject to change without notice.

BLOCK DIAGRAM

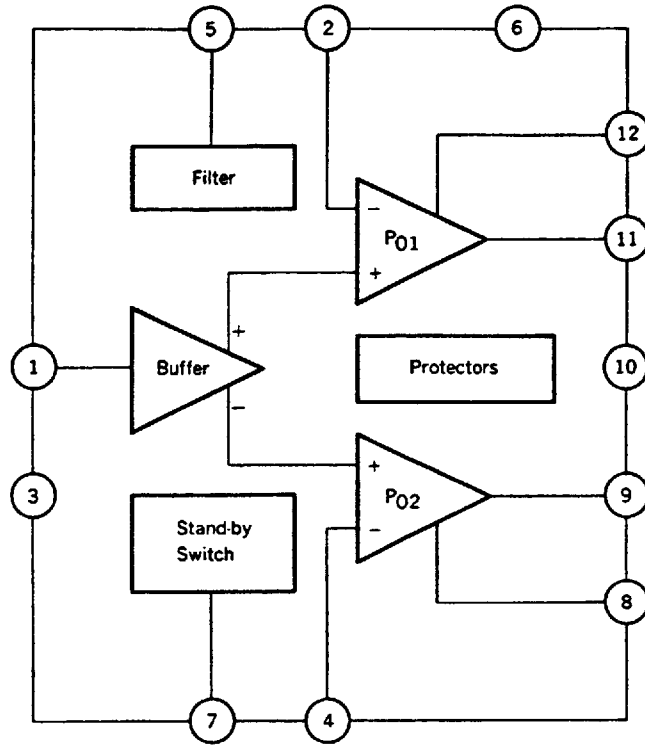


CONNECTION DIAGRAM

| PIN NO. | CONNECTION | PIN NO. | CONNECTION |
|---------|---------------|---------|-----------------|
| 1 | Input | 7 | Stand-by Switch |
| 2 | NFB1 | 8 | Bootstrap 2 |
| 3 | GND for Input | 9 | Output 2 |
| 4 | NFB2 | 10 | GND for Output |
| 5 | Filter | 11 | Output 1 |
| 6 | VCC | 12 | Bootstrap 1 |

ABSOLUTE MAXIMUM RATINGS (T_a = 25 °C)

| | | | |
|--------------------------------|-----------------------|-------------|----|
| Supply Voltage (Note) | V _{CC surge} | 60* | V |
| Supply Voltage (Operational) | V _{CC} | 18 | V |
| Output Current (Instantaneous) | I _o | 8 | A |
| Power Dissipation | P _D | 50 | W |
| Operating Temperature | T _{opt} | -30 to +85 | °C |
| Storage Temperature | T _{stg} | -40 to +150 | °C |

*

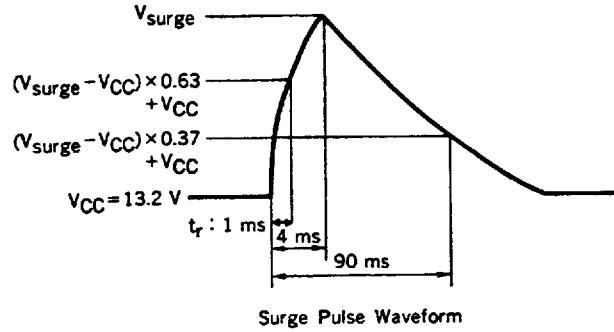


RECOMMENDED OPERATING CONDITIONS (T_a = 25 °C)

| | | |
|---------------------------|------------------------|----|
| Supply Voltage Range | 9 to 16 | V |
| Load Impedance | 2 to 8 | Ω |
| Pin 7 Voltage (Operating) | 3.5 to V _{CC} | V |
| Pin 7 Voltage (Stand-by) | 0 to 1.5 | V |
| Voltage Gain | 34 MIN. | dB |

ELECTRICAL CHARACTERISTICS (T_a = 25 °C, V_{CC} = 13.2 V, R_L = 4 Ω, f = 1 kHz)

| CHARACTERISTIC | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITIONS |
|--------------------------------|---------------------|------|------|------|------|---|
| Quiescent Current | I _{CC} | | 150 | 250 | mA | V _i = 0 |
| Output Offset Voltage | V _{offset} | -150 | 0 | +150 | mV | V _i = 0 |
| Output Power | P _{O1} | 32 | 40 | | W | R _L = 2 Ω, THD = 10 % |
| | P _{O2} | | 45 | | W | R _L = 2 Ω, THD = 10 %, V _{CC} = 14.4 V |
| | P _{O3} | 20 | 24 | | W | R _L = 4 Ω, THD = 10 % |
| | P _{O4} | 25 | 33 | | W | R _L = 2 Ω, THD = 1 % |
| | P _{O5} | 15 | 19 | | W | R _L = 4 Ω, THD = 1 % |
| Voltage Gain | A _v | | 40 | | dB | P _O = 2 W |
| Total Harmonic Distortion | THD ₁ | | 0.03 | 0.12 | % | R _L = 2 Ω, P _O = 8 W |
| | THD ₂ | | 0.03 | 0.12 | % | R _L = 4 Ω, P _O = 4 W |
| Output Noise Level | V _n | | 0.35 | 0.7 | mV | R _G = 10 kΩ, BW = 20 Hz to 20 kHz |
| Supply Voltage Rejection Ratio | SVR | 50 | 60 | | dB | R _G = 0, f _{rip} = 100 Hz, V _{rip} = 1.0 V |
| Input Resistance | R _i | 20 | 30 | | kΩ | |
| Roll-off Frequency | f _H | 100 | 250 | 400 | kHz | A _v = -3 dB from 1 kHz Ref High |
| | f _L | | 5 | 10 | Hz | A _v = -3 dB from 1 kHz Ref Low |
| Stand-by Current | I _{CC(SB)} | | 0.05 | 10 | μA | 0 ≤ V ₇ ≤ 1.5 V |


TEST CIRCUIT

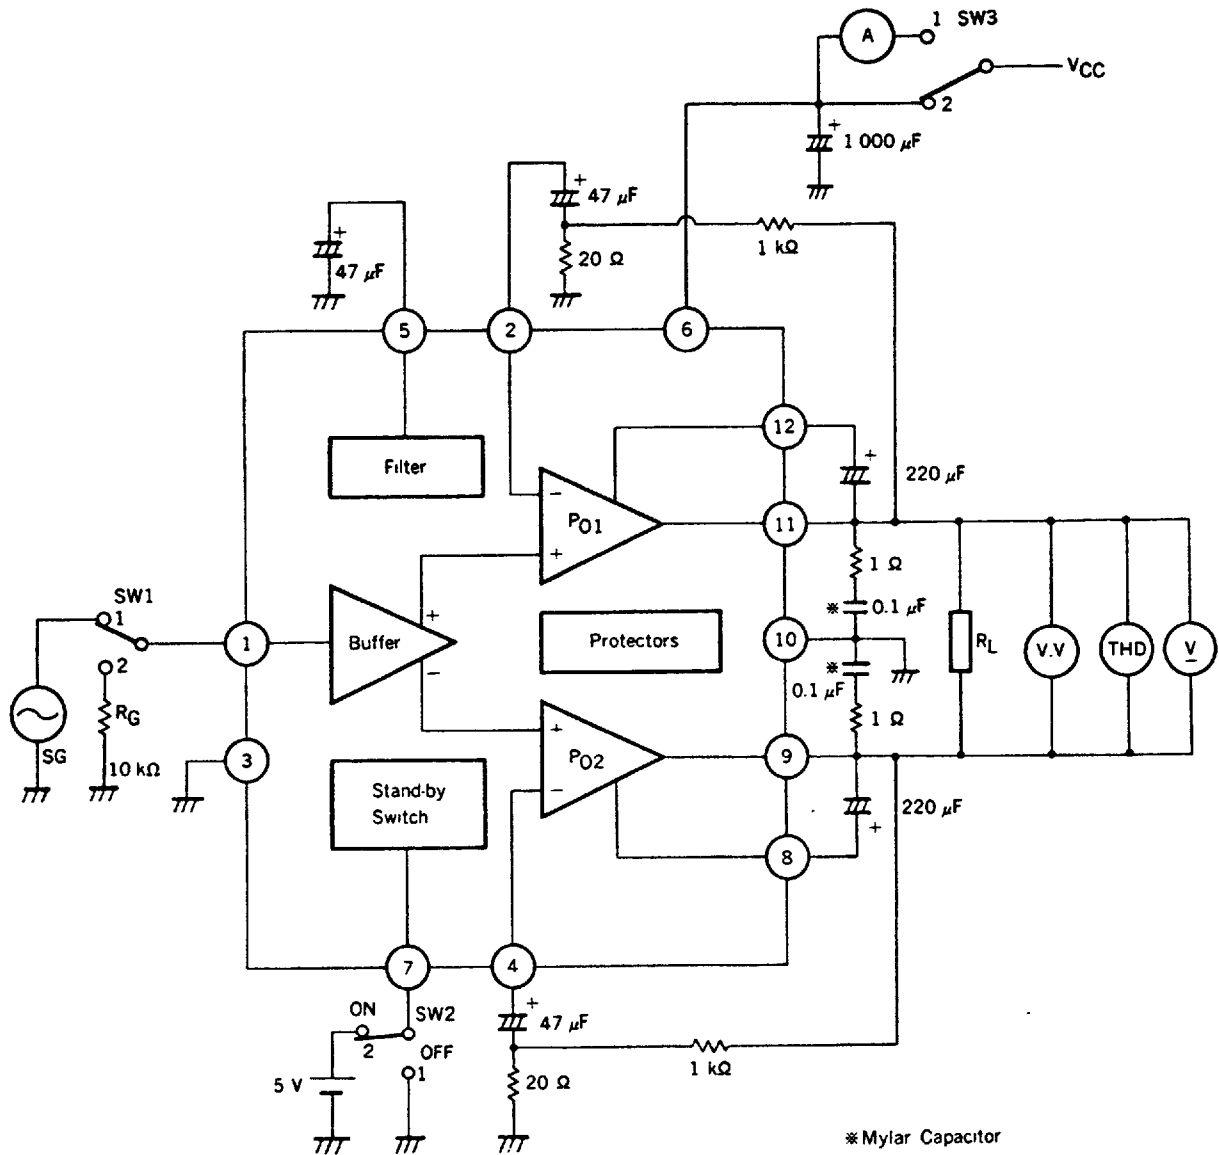

SWITCH POSITION

| CHARACTERISTIC | SYMBOL | SW 1 | SW 2 | SW 3 |
|---------------------------|--------------|------|------|------|
| Quiescent Current | I_{CC} | 2 | 2 | 1 |
| Output Offset Voltage | V_{offset} | 2 | 2 | 2 |
| Voltage Gain | A_v | 1 | 2 | 2 |
| Output Power | P_O | 1 | 2 | 2 |
| Total Harmonic Distortion | THD | 1 | 2 | 2 |
| Output Noise Level | V_n | 2 | 2 | 2 |
| Stand-by Current | $I_{CC(SB)}$ | 2 | 1 | 1 |







TYPICAL APPLICATION






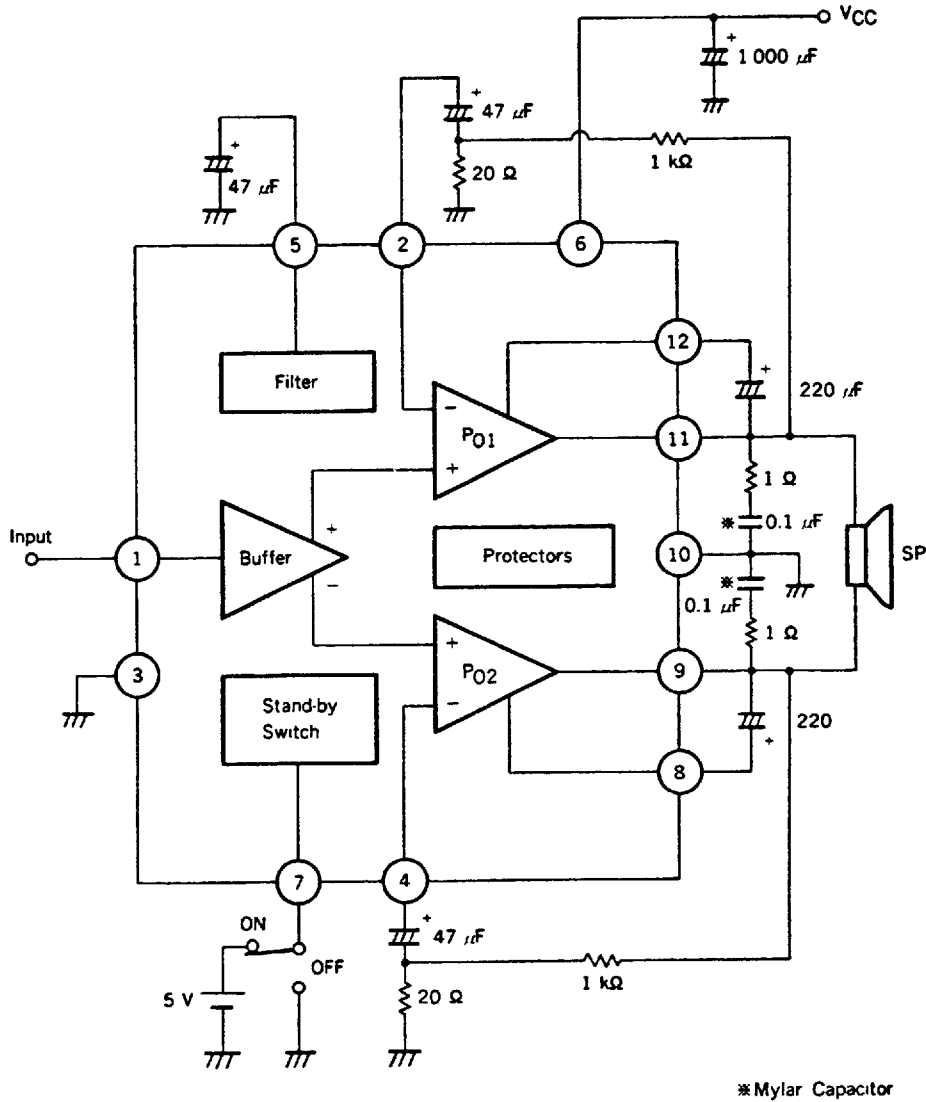








INSTRUCTION FOR USE





- (1) How to attach the heatsink.
 - Surely use the silicon grease.
 - Please keep the fastening torque for the screw in the range of 5 to 8 kg·cm.
 - Flatness of attached area of heatsink should be kept within 0.1 mm.
- (2) When this IC is unstable due to the high impedance of signal source, connect a capacitor (about 1 000 pF) between Pin 1 and Pin 3.

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

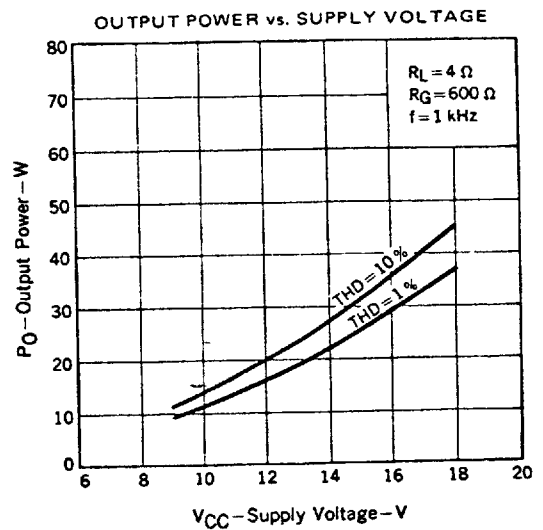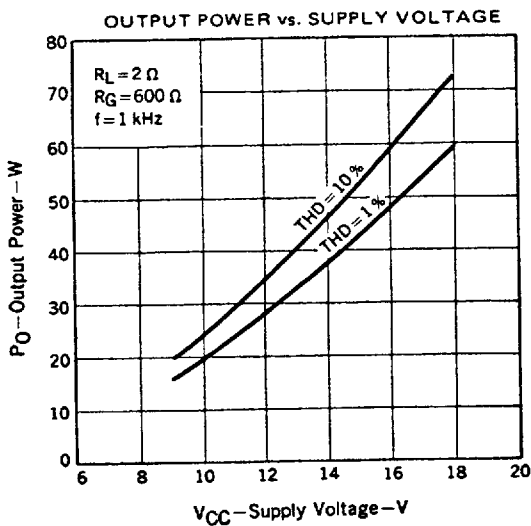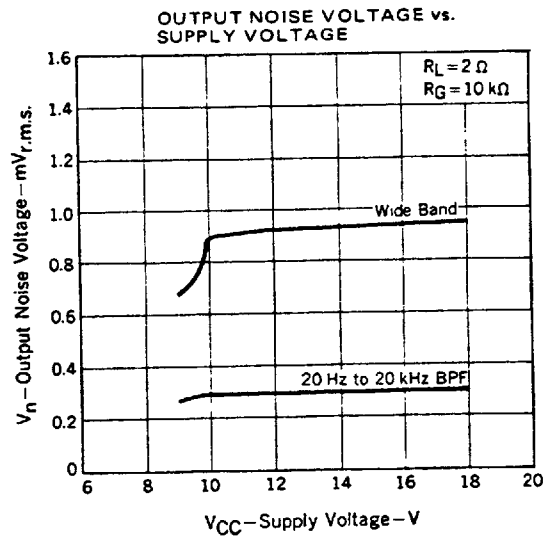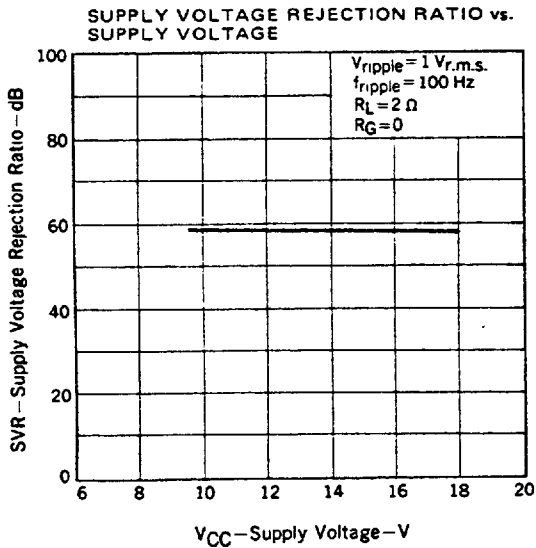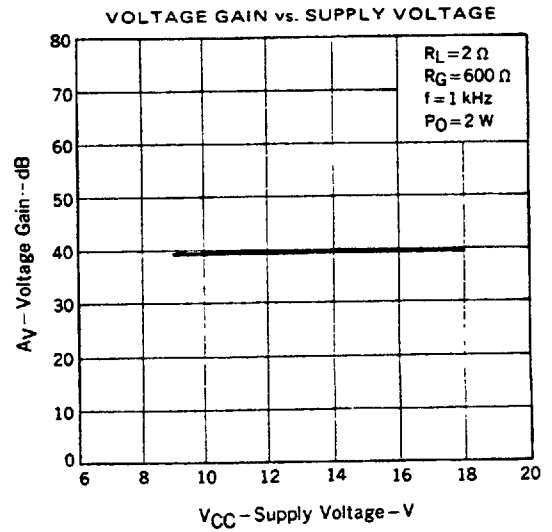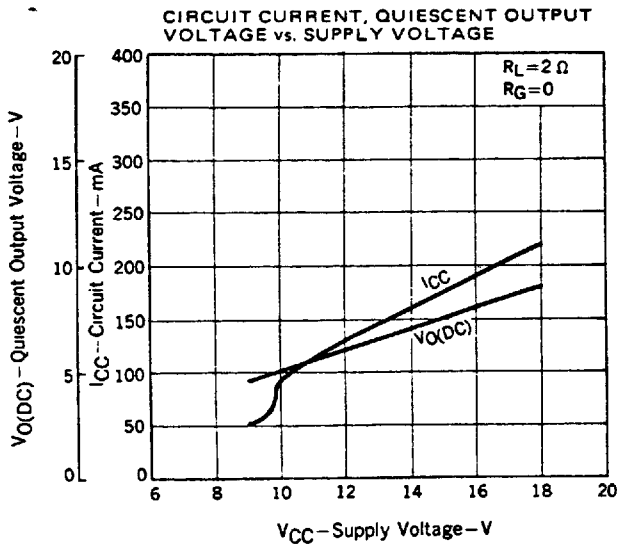

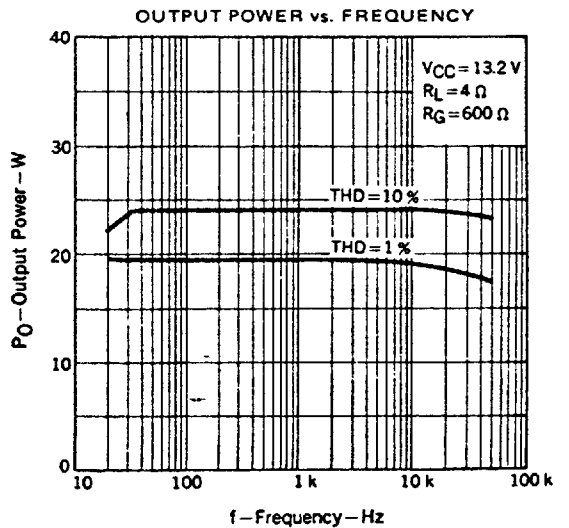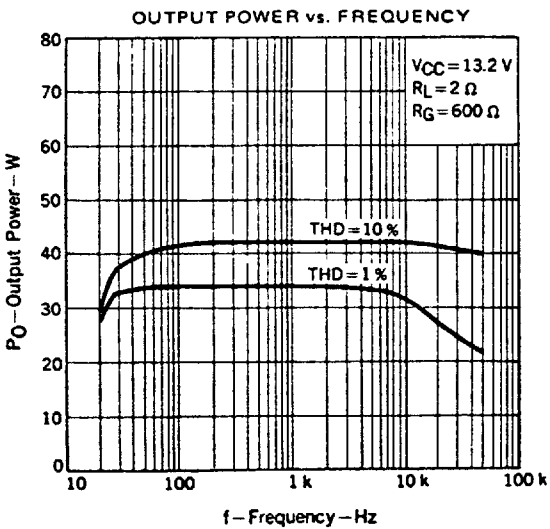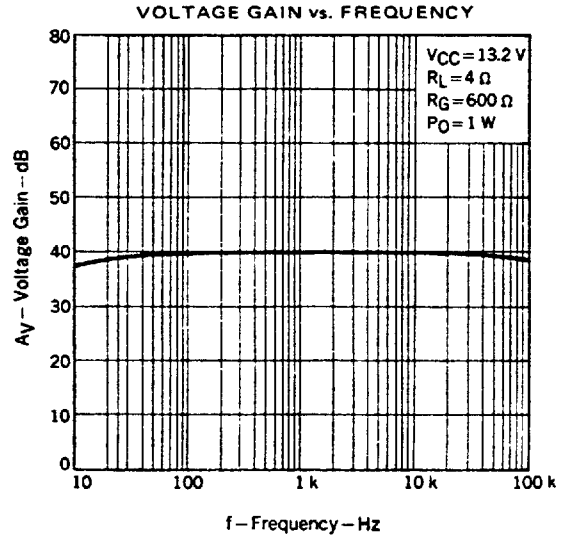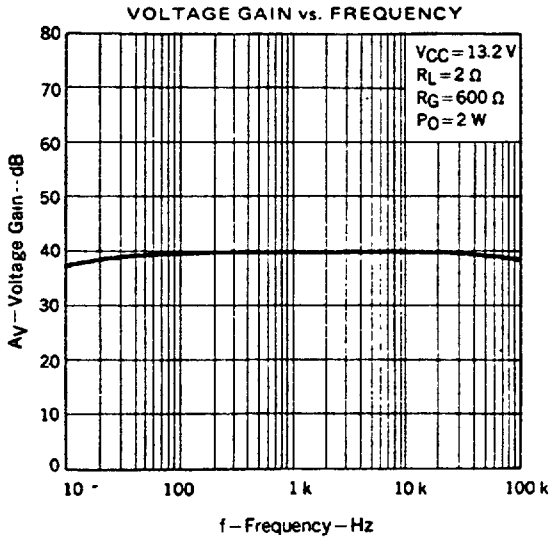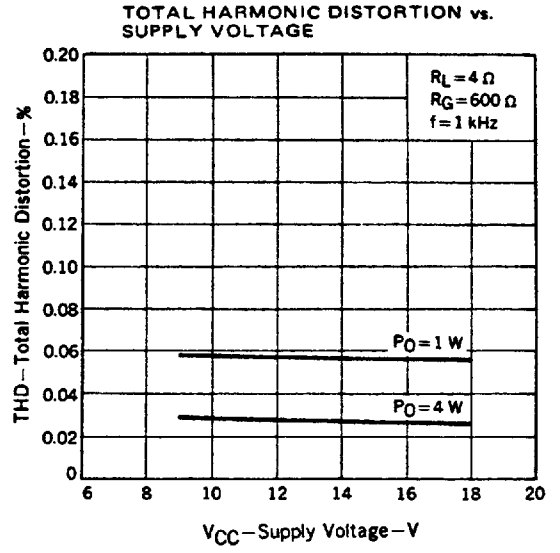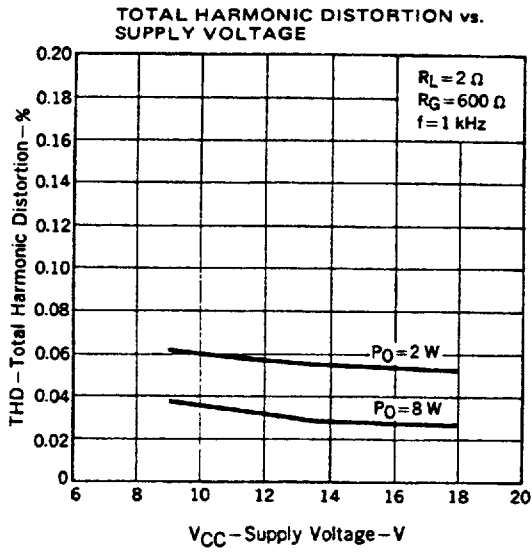

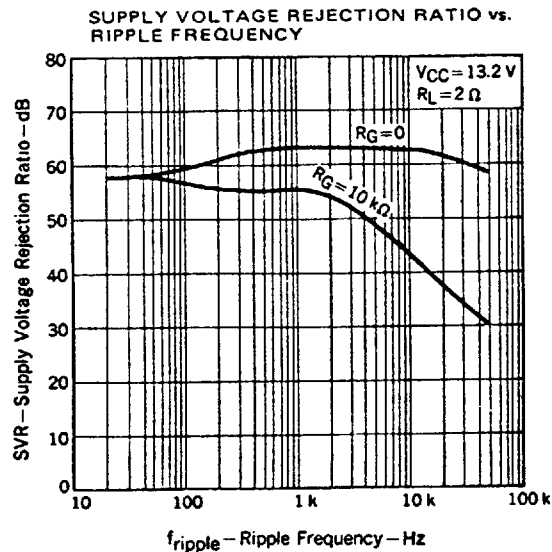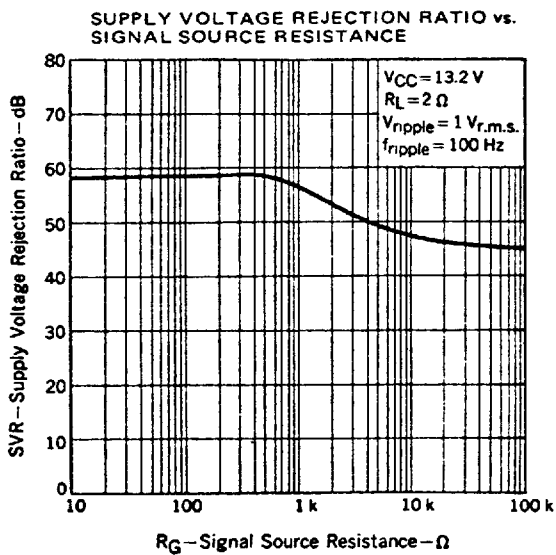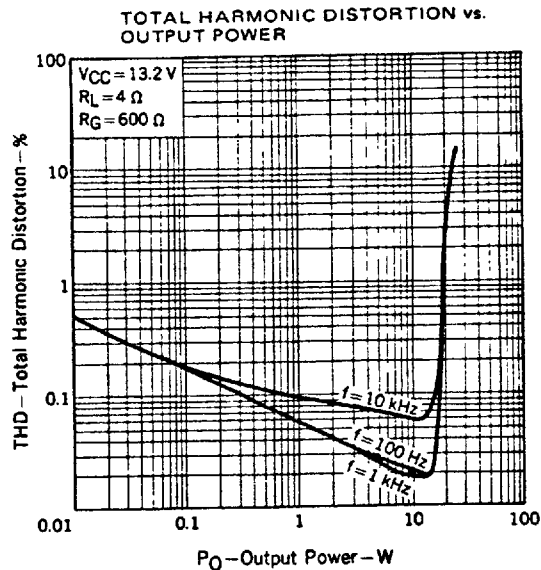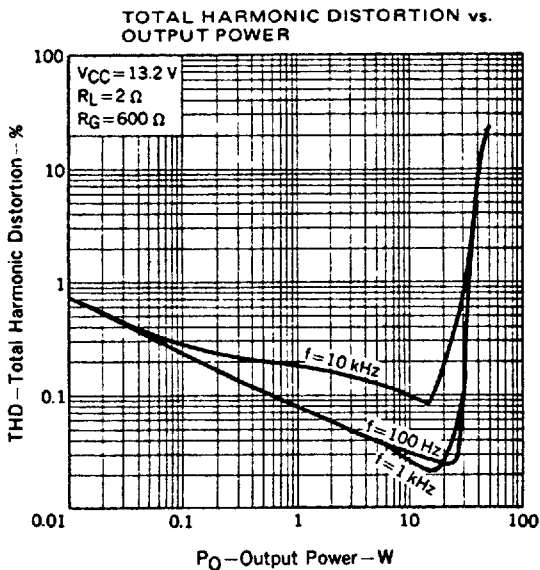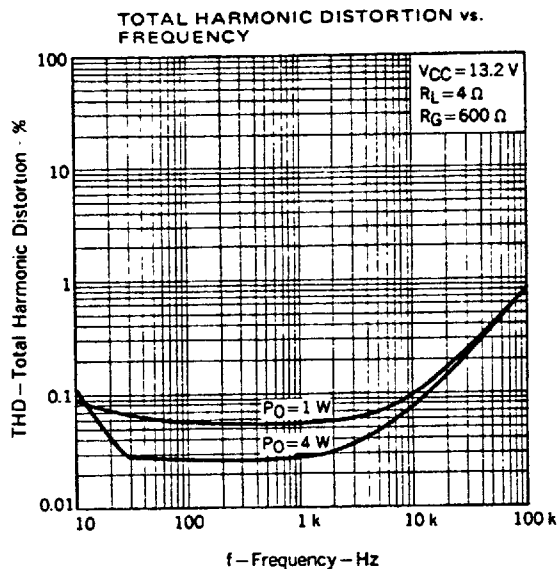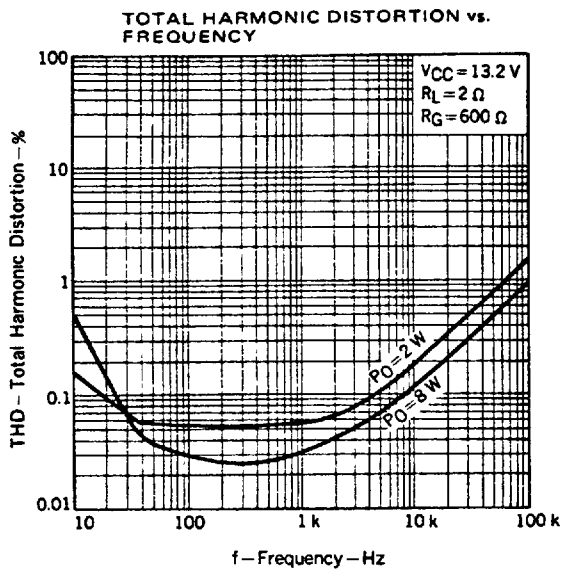

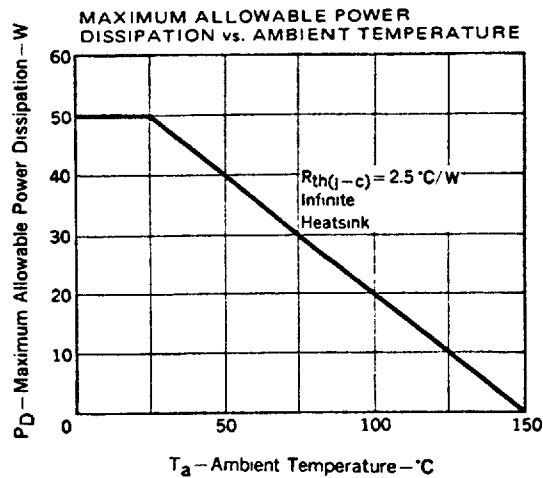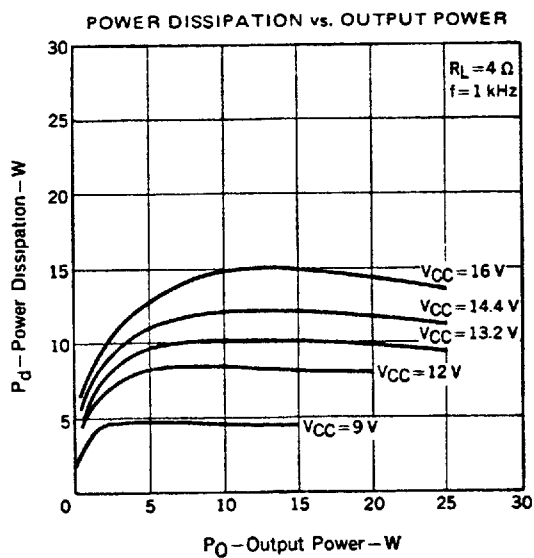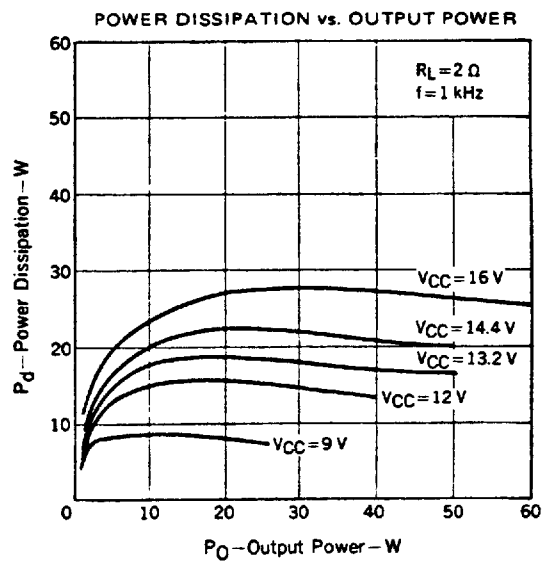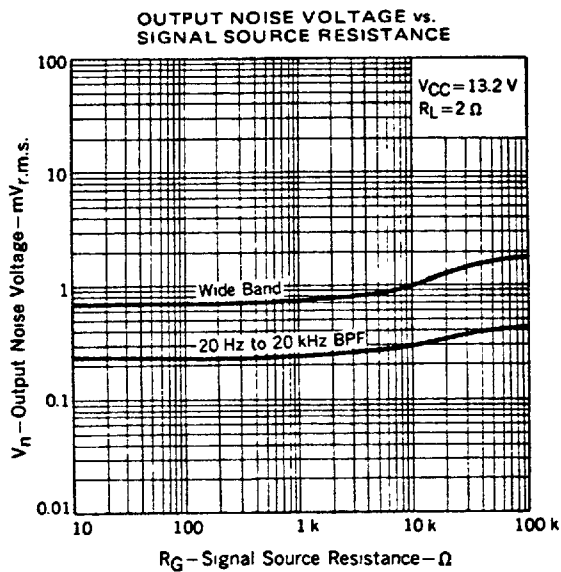

RECOMMENDED SOLDERING CONDITIONS

The following conditions (see table below) must be met when soldering this product.


Please consult with our sales offices in case other soldering process is used, or in case soldering is done under different conditions.

TYPE OF THROUGH HOLE MOUNT DEVICE**μPC2500AH**

| Soldering process | Soldering conditions |
|-------------------|--|
| Wave soldering | Solder temperature: 260 °C or below, Flow time: 10 seconds or below |

PACKAGE DIMENSIONS

12 PIN PLASTIC POWER SIP (L)

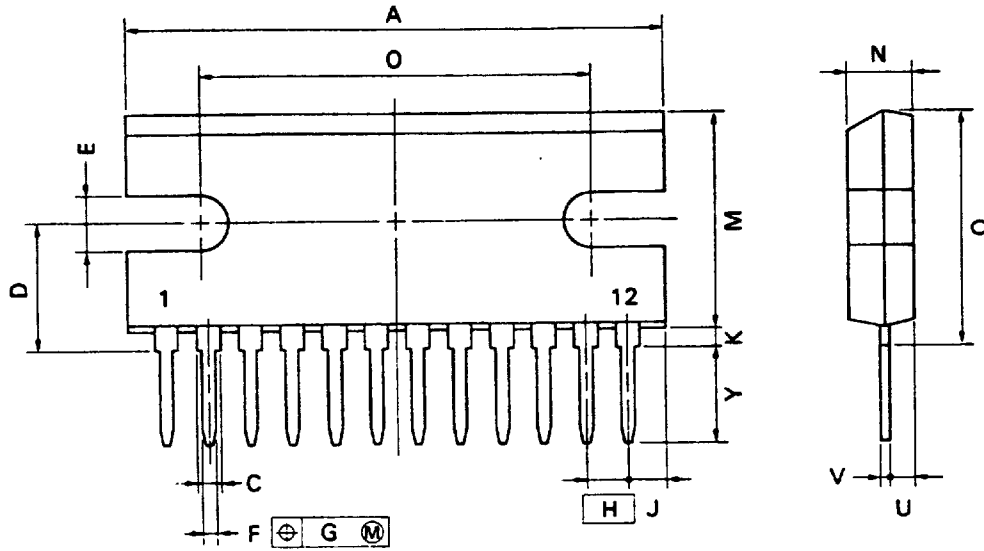

NOTE

Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.

P12HP-254B2

| ITEM | MILLIMETERS | INCHES |
|------|----------------------|-------------------------|
| A | 33.02 MAX. | 1.3 MAX. |
| C | 1.2 MIN. | 0.047 MIN. |
| D | 8.2 ^{-0.3} | 0.323 ^{-0.012} |
| E | 3.6 ^{-0.1} | 0.142 ^{-0.004} |
| F | 0.8 ^{-0.1} | 0.031 ^{-0.004} |
| G | 0.25 | 0.01 |
| H | 2.54 | 0.1 |
| J | 2.54 MAX. | 0.1 MAX. |
| K | 1.0 MIN. | 0.039 MIN. |
| M | 13.8 MAX. | 0.544 MAX. |
| N | 4.8 ^{-0.2} | 0.189 ^{-0.008} |
| O | 24.0 ^{-0.1} | 0.945 ^{-0.004} |
| Q | 15.0 MAX. | 0.591 MAX. |
| U | 2.8 MAX. | 0.111 MAX. |
| V | 0.35 ^{-0.1} | 0.014 ^{-0.004} |
| Y | 6.5 ^{-0.7} | 0.256 ^{-0.028} |