



### CMOS HS-A1440 Series

### Description


The **HS-A1440 Series** of quartz crystal oscillators provide enable/disable 3-state CMOS compatible signals for bus connected systems. Supplying Pin 1 of the HS-A1440 units with a logic "1" or open enables its pin 8 output. In the disabled mode, pin 8 presents a high impedance to the load.

### Features

- Wide frequency range– 70.1MHz to 125.0MHz
- User specified tolerance available
- Will withstand vapor phase temperatures of 253°C for 4 minutes maximum
- Space-saving alternative to discrete component oscillators
- High shock resistance, to 3000g
- All metal, resistance weld, hermetically sealed package
- 3.3 Volt operation
- Low Jitter
- High Q Crystal actively tuned oscillator circuit
- Power supply decoupling internal
- No internal PLL avoids cascading PLL problems
- Low power consumption
- Gold plated leads - Solder dipped leads available upon request

### Electrical Connection

Pin	Connection
1	Enable Input
7	Grd & Case
8	Output
14	V <sub>DD</sub>

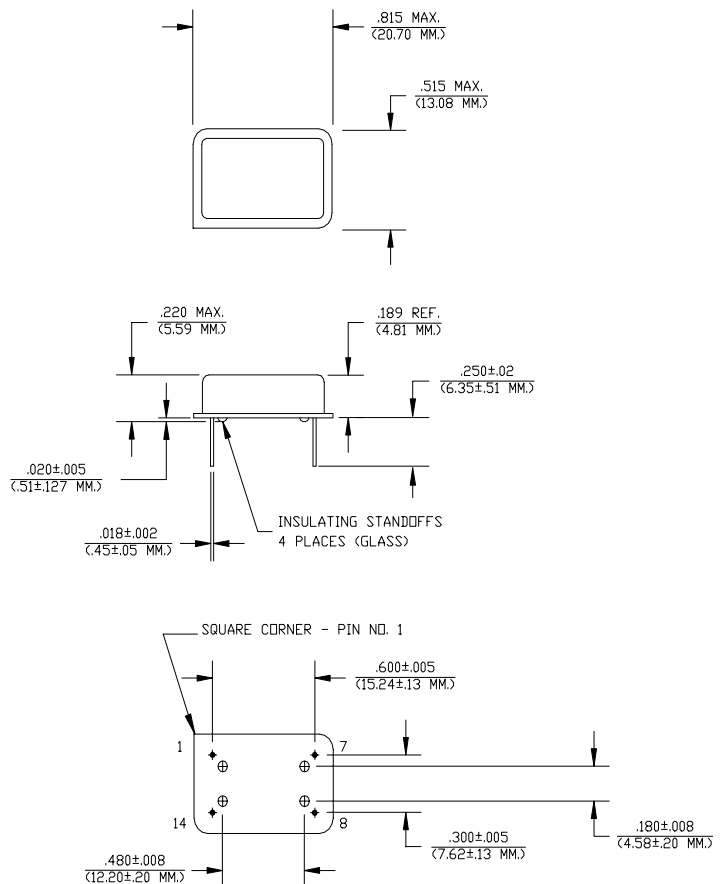

Dimensions are in inches and (MM)



**HS-A1440 Series**    Continued  
**CMOS**

**Rev. D**

### Operating Conditions and Output Characteristics

#### Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Frequency	----	----	70.1MHz	----	125.0MHz
Duty Cycle	----	@ V <sub>DD</sub> /2	45/55%	----	55/45%
Logic 0	V <sub>OL</sub>	@ 600μA	----	0.1V	0.2V
Logic 1	V <sub>OH</sub>	@ 600μA	V <sub>DD</sub> -0.2V	V <sub>CD</sub> -0.1V	----
Rise & Fall Time	tr,tf	10-90%	----	1 ns	2 ns
TPz	----	----	----	----	100 ns
Jitter, RMS <sup>(2)</sup>	----	----	----	----	5 psec
Frequency Stability <sup>(1)</sup>	dF/F	Overall conditions including: voltage, calibration, temp., 10 yr aging, shock, vibration	-100ppm	----	+100ppm

#### General Characteristics

Parameter	Symbol	Conditions	Min	Typical	Max
Supply Voltage	V <sub>DD</sub>	----	3.135V	3.3V	3.465V
Supply Current	I <sub>DD</sub>	No Load	0.0 mA	40mA	60mA
Output current	I <sub>O</sub>	----	0.0 mA	----	±25.0 mA
Operating temperature	T <sub>A</sub>	----	0°C	----	70°C
Storage temperature	T <sub>S</sub>	----	-55°C	----	125°C
Power Dissipation	P <sub>D</sub>	----	----	----	277 mW
Lead temperature	T <sub>L</sub>	Soldering, 10 sec.	----	----	300°C
Load	----	----	----	----	15pf
Start-up time	t <sub>s</sub>	----	----	2 ms	10 ms

#### Environmental and Mechanical Characteristics

Mechanical Shock    Per MIL-STD-202, Method 213, Condition E  
 Thermal Shock        Per MIL-STD-833, Method 1011, Condition A  
 Vibration              0.060" double amplitude 10 Hz to 55 Hz, 35g's 55Hz to 2000 Hz  
 Soldering Condition    300°C for 10 seconds  
 Hermetic Seal            Leak rate less than 1 x 10<sup>-8</sup> atm.cc/sec of helium

**Footnotes:**

- 1) Standard frequency stability (±20,±25,±50ppm & others available)
- 2) Jitter performance is frequency dependent. Please contact factory for full characterization.

**Creating a Part Number**

**HS - A144X - FREQ**

<b>Package Code</b>	<b>Tolerance/Performance</b>
HS    Leaded 4 pin (14 pin)	0    ±100ppm 0-70°C
SM    Leaded 4 pin (14 pin) SMD	1    ±50ppm 0-70°C
Gull Wing	7    ±25ppm 0-70°C
<b>Input Voltage</b>	9    Customer Specific
Code    Specification	A    ±20ppm 0-70°C
A        3.3V	B    ±50ppm -40 to +85°C
5V	C    ±100ppm -40 to +85°C

**Test Load:**

