


SBD Type : C20T04Q

OUTLINE DRAWING

FEATURES

- *SQUARE-PAK TO-263AB(SMD)
- Packaged in 24mm Tape and Reel
- *Dual Diodes – Cathode Common
- *Low Forward Voltage Drop
- *High Surge Capability
- * $T_j=150\text{ }^\circ\text{C}$ operation

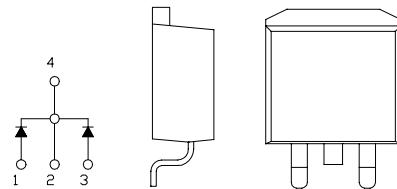


Maximum Ratings

Approx Net Weight: 1.4g

Rating	Symbol	C20T04Q			Unit
Repetitive Peak Reverse Voltage	V_{RRM}	40			V
Average Rectified Output Current	I_o	20	$T_c=119\text{ }^\circ\text{C}$	50 Hz Full Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	22.2			A
Surge Forward Current	I_{FSM}	180	50Hz Full Sine Wave ,1cycle Non-repetitive		
Operating JunctionTemperature Range	T_{jw}	-40 to +150			$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +150			$^\circ\text{C}$

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25\text{ }^\circ\text{C}, V_{RM}= V_{RRM}$ per arm	-	-	10	mA
Peak Forward Voltage	V_{FM}	$T_j= 25\text{ }^\circ\text{C}, I_{FM}= 10 \text{ A}$ per arm	-	-	0.55	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	1.5	$^\circ\text{C}/\text{W}$

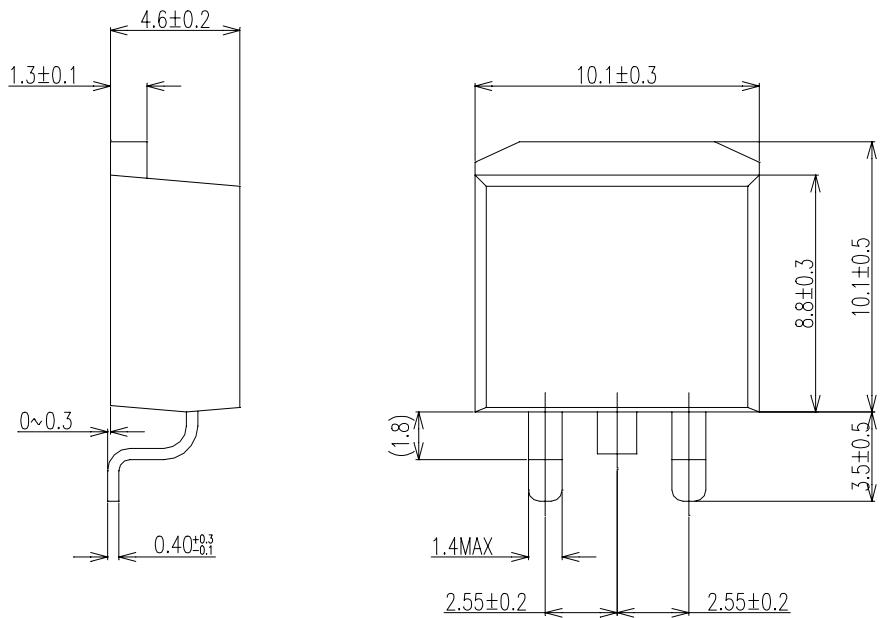C20T04Q OUTLINE DRAWING (Dimensions in mm)

SOLDERING PAD
