


FRD Type : EA31FS6

OUTLINE DRAWING

FEATURES

- * TO-251AA Case
- * Ultra - Fast Recovery
- * Low Forward Voltage drop
- * Low Power Loss
- * High Surge Capability
- * 200 Volts thru 600 Volts Types Available

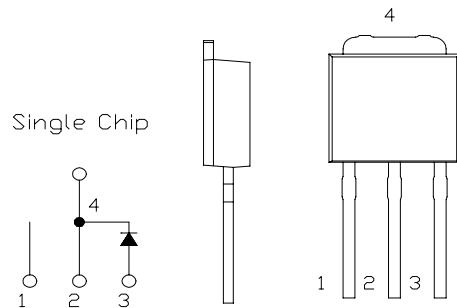

Maximum Ratings

Approx Net Weight:0.35g


| Rating | Symbol | EA31FS6 | | | | Unit |
|-------------------------------------|------------------------|---------------|---|-----------------------|---------------------------------------|------|
| Repetitive Peak Reverse Voltage | V _{RRM} | 600 | | | | V |
| Average Rectified Output Current | P.C.Board mounted * | Io | 1.2 | T _a =29°C | 50Hz Half Sine Wave Resistive Load | |
| | | | 3.0 | T _c =119°C | | |
| RMS Forward Current | I _{F(RMS)} | 4.71 | | | | A |
| Surge Forward Current | I _{FSM} | 45 | 50Hz Half Sine Wave,1cycle, Non-repetitive | | | |
| Operating JunctionTemperature Range | T _{jw} | - 40 to + 150 | | | | °C |
| Storage Temperature Range | T _{stg} | - 40 to + 150 | | | | °C |

Electrical • Thermal Characteristics

| Characteristics | | Symbol | Conditions | Min | Typ | Max | Unit |
|-----------------------|---------------------|--|---------------------|-----|-----|------|------|
| Peak Reverse Current | I _{RM} | T _j =25°C, V _{RRM} =V _{RRM} per Arm | - | - | 20 | μA | |
| Peak Forward Voltage | V _{FM} | T _j =25°C, I _{FM} = 3 A per Arm | - | - | 1.7 | V | |
| Reverse Recovery Time | trr | I _{FM} = 3 A, -di/dt= 50 A/μs, T _a = 25°C | - | - | 35 | ns | |
| Thermal Resistance | Junction to Ambient | R _{th(j-a)} | P.C.Board mounted * | - | - | 80 | °C/W |
| | Junction to Case | R _{th(j-c)} | - | - | 6 | °C/W | |

* Print Land = 20x20 mm

EA31FS6 OUTLINE DRAWING (Dimensions in mm)

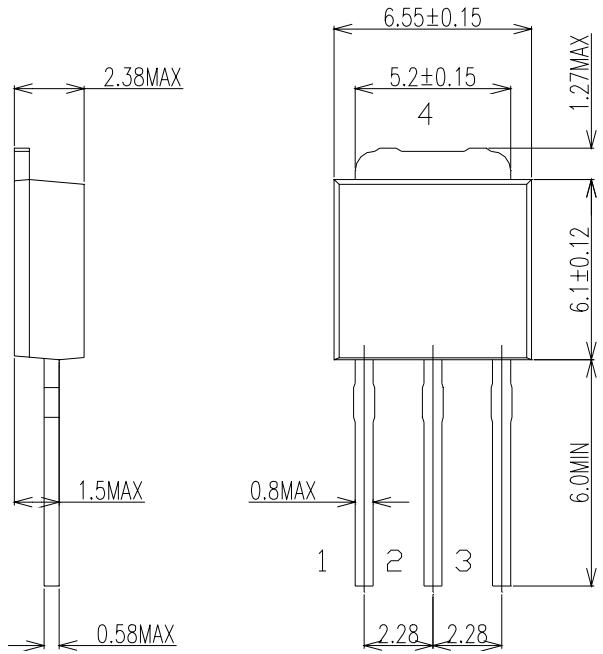

Single Chip

