


# SBD Type : EA60QC04-F

## OUTLINE DRAWING

### FEATURES

- \* TO-252AA Case, Surface Mount Device
- \* Dual Diodes Cathode Common
- \* Low Forward Voltage drop
- \* Low Power Loss
- \* High Surge Capability
- \* 30 Volts thru 100 Volts Types Available
- \* Packaged in 16mm Tape and Reel

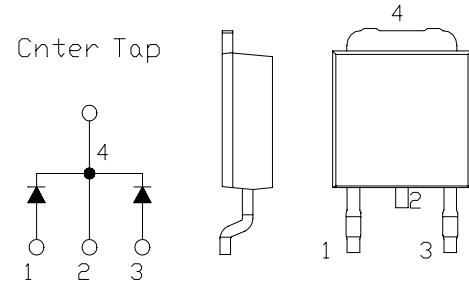

### Maximum Ratings

Approx Net Weight: 0.30g


Rating	Symbol	EA60QC04-F				Unit					
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	40				V					
Non-repetitive Peak Reverse Voltage	V <sub>RSM</sub>	45				V					
Average Rectified Output Current	I <sub>O</sub>	2.0	T <sub>a</sub> =21°C	50Hz Full Sine Wave Resistive Load		A					
		6.0	T <sub>c</sub> =118°C								
RMS Forward Current	I <sub>F(RMS)</sub>	6.66				A					
Surge Forward Current	I <sub>FSM</sub>	45	50Hz Full Sine Wave, 1cycle, Non-repetitive			A					
Operating JunctionTemperature Range	T <sub>jw</sub>	- 40 to + 150				°C					
Storage Temperature Range	T <sub>stg</sub>	- 40 to + 150				°C					

### Electrical • Thermal Characteristics


Characteristics		Symbol	Conditions	Min	Typ	Max	Unit
Peak Reverse Current	I <sub>RM</sub>	T <sub>j</sub> =25°C, V <sub>RM</sub> =V <sub>RRM</sub> per Arm	-	-	3.0	mA	
Peak Forward Voltage	V <sub>FM</sub>	T <sub>j</sub> =25°C, I <sub>FM</sub> = 3A per Arm	-	-	0.55	V	
Thermal Resistance	Junction to Ambient	R <sub>th(j-a)</sub>	P.C.Board mounted *	-	-	80	°C/W
	Junction to Case	R <sub>th(j-c)</sub>	-	-	-	5	°C/W

\* Print Land = 20x20 mm

## EA60QC04-F OUTLINE DRAWING (Dimensions in mm)

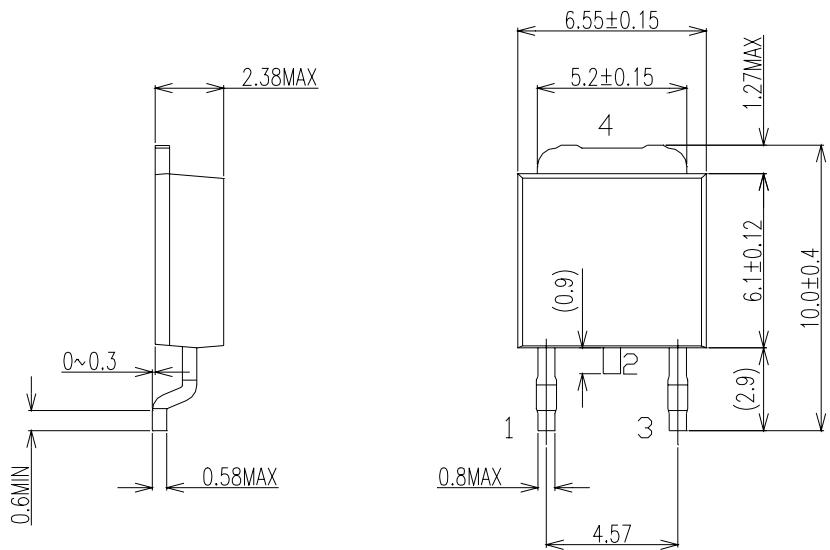

## SOLDERING PAD

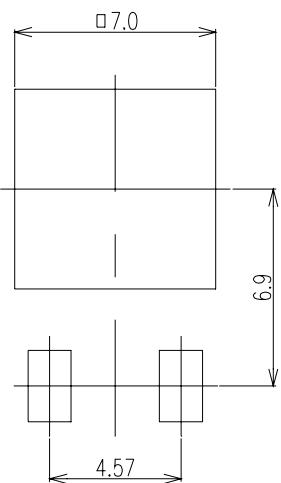

Cnter Tap

