


DIODE Type : FSD20A90

OUTLINE DRAWING

FEATURES

- * Fully Molded Isolation Case
- * Low Forward Voltage Drop
- * Low Reverse Leakage Current
- * High Surge Capability
- * High Voltage

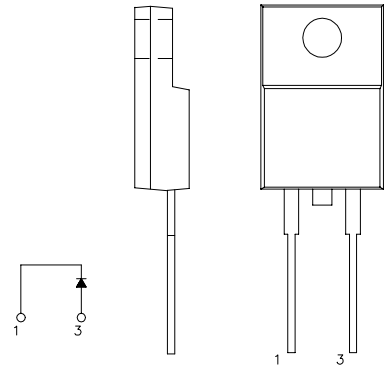

Maximum Ratings

Approx Net Weight:1.7g

Rating	Symbol	FSD20A90		Unit
Repetitive Peak Reverse Voltage	V_{RRM}	900		V
Average Rectified Output Current	I_O	20	$T_c=102^\circ\text{C}$ 50 Hz Half Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	31.4		A
Surge Forward Current	I_{FSM}	200	50 Hz Half Sine Wave, 1cycle Non-repetitive	A
Operating Junction Temperature Range	T_{jw}	- 40 to + 150		$^\circ\text{C}$
Storage Temperature Range	T_{stg}	- 40 to + 150		$^\circ\text{C}$
Mounting torque		0.5	Recommended value	N.m

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I_{RM}	$T_j= 25^\circ\text{C}$, $V_{RM}= V_{RRM}$	-	-	50	μA
Peak Forward Voltage	V_{FM}	$T_j= 25^\circ\text{C}$, $I_{FM}= 20\text{A}$	-	-	1.25	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	1.5	$^\circ\text{C/W}$
	$R_{th(c-f)}$	Case to Fin	-	-	1.5	

FSD20A90 OUTLINE DRAWING (Dimensions in mm)

