


FRD Type : FSF10A40B

OUTLINE DRAWING

FEATURES

- * Fully Molded Isolation Case
- * Ultra – Fast Recovery
- * Low Forward Voltage Drop
- * Low Power Loss, High Efficiency
- * High Surge Capability
- * 200 Volts thru 600 Volts Types Available

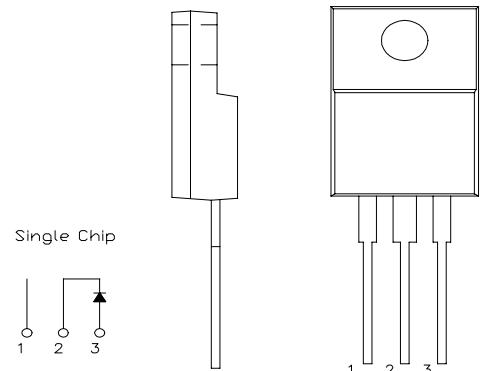


Maximum Ratings

Approx Net Weight: 1.75g

Rating	Symbol	FSF10A40B			Unit
Repetitive Peak Reverse Voltage	V _{RRM}	400			V
Non-repetitive Peak Reverse Voltage	V _{RSM}	440			
Average Rectified Output Current	I _o	10	T _c =95°C	50 Hz Half Sine Wave Resistive Load	A
RMS Forward Current	I _{F(RMS)}	15.7			A
Surge Forward Current	I _{FSM}	120	50 Hz Half Sine Wave, 1cycle Non-repetitive		
Operating JunctionTemperature Range	T _{jw}	- 40 to + 150			°C
Storage Temperature Range	T _{stg}	- 40 to + 150			°C
Mounting torque		0.5	Recommended value		
					N·m

Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	I _{RM}	T _j = 25°C, V _{RM} = V _{RRM}	-	-	25	µA
Peak Forward Voltage	V _{FM}	T _j = 25°C, I _{FM} = 10A	-	-	1.30	V
Reverse Recovery Time	trr	I _{FM} = 10A, -di/dt= 50 A/µs, Ta= 25°C	-	-	45	ns
Thermal Resistance	R _{th(j-c)}	Junction to Case		-	4	°C/W
	R _{th(c-f)}	Case to Fin		-	1.5	

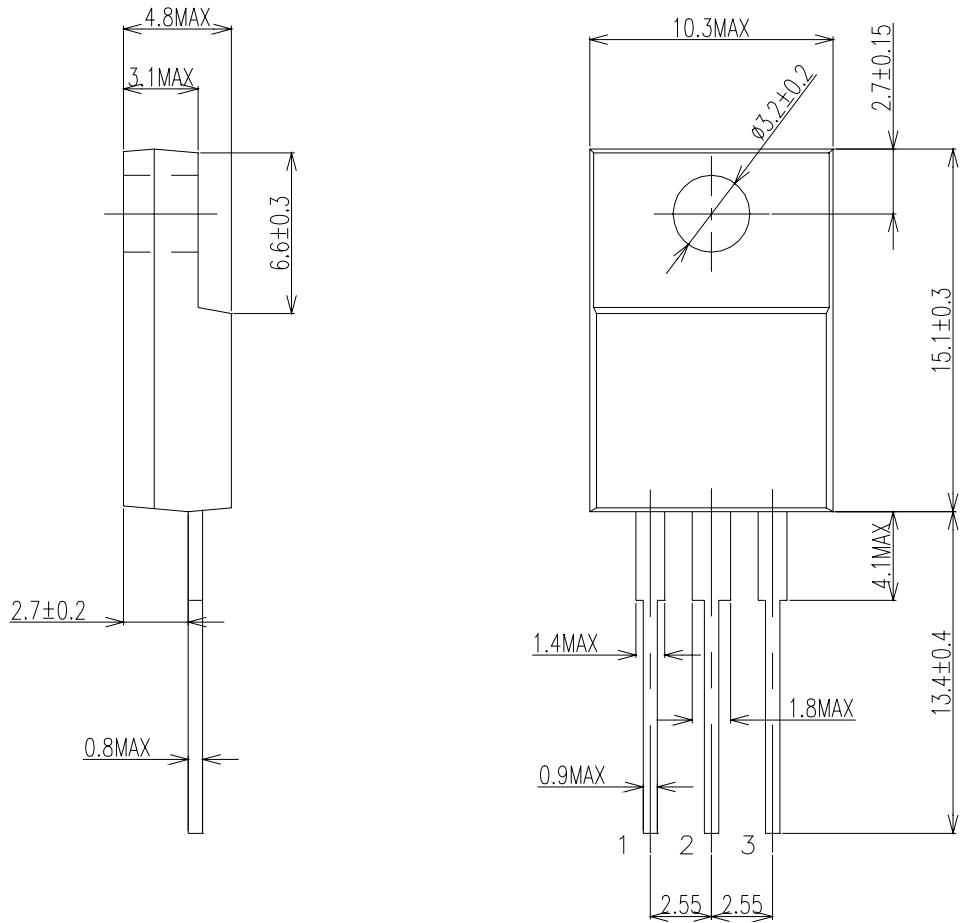FSF10A40B OUTLINE DRAWING (Dimensions in mm)


Single Chip

