


# SBD Type : GSH10A09B

OUTLINE DRAWING

**FEATURES**

- \*Similar to TO-220AB Case
- \*Low Forward Voltage Drop
- \*Low Power Loss,High Efficiency
- \*High Surge Capability
- \*Tj=150 °C operation

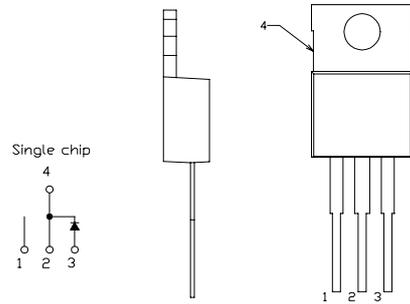

## Maximum Ratings


Approx Net Weight: 1.9g

Rating	Symbol	GSH10A09B		Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	90		V
Average Rectified Output Current	$I_O$	10	Tc=121°C 50 Hz half Sine Wave Resistive Load	A
RMS Forward Current	$I_{F(RMS)}$	15.7		A
Surge Forward Current	$I_{FSM}$	180	50Hz Half Sine Wave ,1cycle Non-repetitive	A
Operating JunctionTemperature Range	$T_{jw}$	-40 to +150		°C
Storage Temperature Range	$T_{stg}$	-40 to +150		°C
Mounting torque	$F_{tor}$	recommended torque = 0.5		N•m

## Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit
Peak Reverse Current	$I_{RM}$	Tj= 25°C, $V_{RM}= V_{RRM}$	-	-	1	mA
Peak Forward Voltage	$V_{FM}$	Tj= 25°C, $I_{FM}= 10 A$	-	-	0.88	V
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	-	3	°C /W

GSH10A09B OUTLINE DRAWING (Dimension in mm)

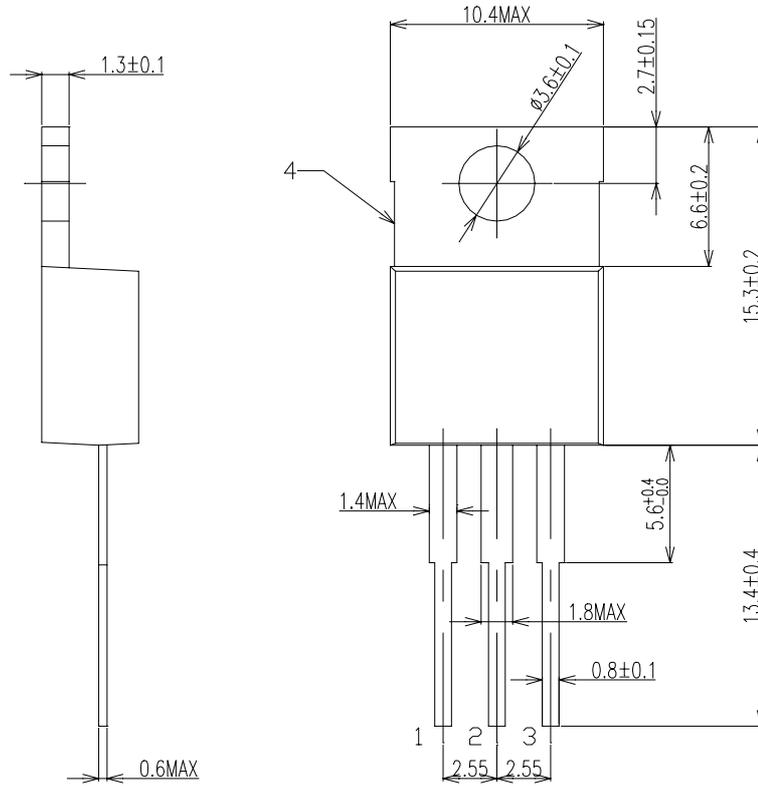

Single chip

