



INTERNATIONAL SEMICONDUCTOR, Inc.

TRANSIENT VOLTAGE SUPPRESSORS FOR MICROPROCESSOR PROTECTION

ICTE-5 thru ICTE-45C

5.0 to 450 VOLTS

1500 WATT PEAK POWER 5.0 WATT STEADY STATE

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25 °C ambient unless otherwise specified

RATING	SYMBOL	VALUE	UNITS
Peak Power Dissipation at $T_A=25^\circ\text{C}$, $T_p=1\text{ms}$ (Note 1)	P_{PK}	1.5	kWatts
Steady State Power Dissipation at $T_l=75^\circ\text{C}$ Lead Lengths .375", (9.5 mm) (Note 2)	P_D	5.0	Watts
Clamping Time 0 Volts to V_{BR}	$t_{clamping}$	$< 1 \times 10^{-12}$	Sec
Forward Surge Rating 1/120 sec (Uni-Polar Only)	I_{FS}	200	Amps
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +175	°C

UNI-POLAR CHARACTERISTICS AT 25°C


ISI PART NUMBER	REVERSE STAND-OFF VOLTAGE (Note 3) V_R Volts	MAXIMUM REVERSE LEAKAGE @ V_R I_{R} uA	MINIMUM BREAKDOWN VOLTAGE @ 1.0 mA V_{BR} Volts	MAXIMUM CLAMPING VOLTAGE @ $I_{PP}=1\text{ A}$ V_C Volts	MAXIMUM CLAMPING VOLTAGE @ $I_{PP}=10\text{ A}$ V_C Volts	MAXIMUM PEAK PULSE CURRENT (Fig. 2) I_{PP} Amps
ICTE-5	5.0	300	6.0	7.1	7.5	160
ICTE-8	8.0	25	9.4	11.3	11.5	100
ICTE-10	10.0	2	11.7	13.7	14.1	90
ICTE-12	12.0	2	14.1	16.1	16.5	70
ICTE-15	15.0	2	17.6	20.1	20.6	60
ICTE-18	18.0	2	21.2	24.2	25.2	50
ICTE-22	22.0	2	25.9	29.8	32.0	40
ICTE-36	36.0	2	42.4	50.6	54.3	23
ICTE-45	45.0	2	52.9	63.3	70.0	19

BI-POLAR CHARACTERISTICS AT 25°C

ICTE-8C	8.0	25	9.4	11.4	11.6	100
ICTE-10C	10.0	2	11.7	14.1	14.5	90
ICTE-12C	12.0	2	14.1	16.7	17.1	70
ICTE-15C	15.0	2	17.6	20.8	21.4	60
ICTE-18C	18.0	2	21.2	24.8	25.5	50
ICTE-22C	22.0	2	25.9	30.8	32.0	40
ICTE-36C	36.0	2	42.4	50.6	54.3	23
ICTE-45C	45.0	2	52.9	63.3	70.0	19

Clamping Factor: 1.33 @ Full rated power
1.20 @ 50% rated power

Clamping Factor is the ratio of V_C to V_{BR}

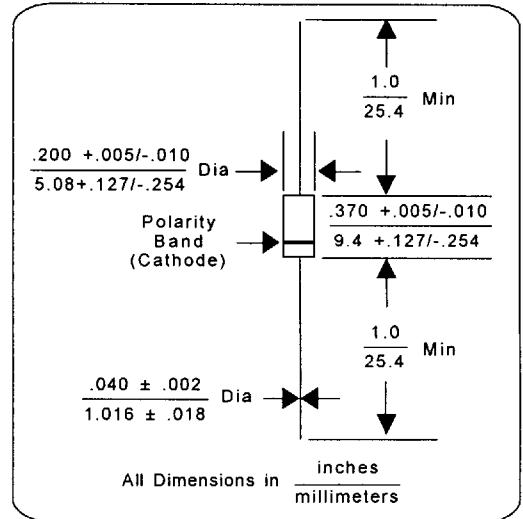

MECHANICAL DATA

- Case: Molded plastic over passivated junctions
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Band Denotes Cathode (Except Bi-Polar)
- Mounting Position: Any
- Weight: 0.053 ounce (1.5 grams)

FEATURES

- Transient Protection for CMOS, MOS, ICs, (TTL, ECL, DTL, RTL, and Linear Functions)
- Voltage range of 4.5 to 45 volts
- Low clamping ratio

NOTES TO CHARACTERISTICS

- Non-repetitive current pulse, per Fig.3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 2
- Mounted on Copper Leaf area of 0.79 sq in (20 sq mm)
- V_{BR} measured after I_t applied for 300 us.
 I_t = Square Wave Pulse or equivalent.
- ICTE-5 not available as Bipolar

Figure 2: CLAMPING VOLTAGE vs PEAK PULSE CURRENT

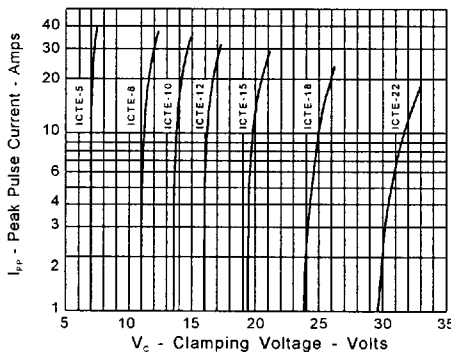


FIGURE 3 - PULSE WAVEFORM


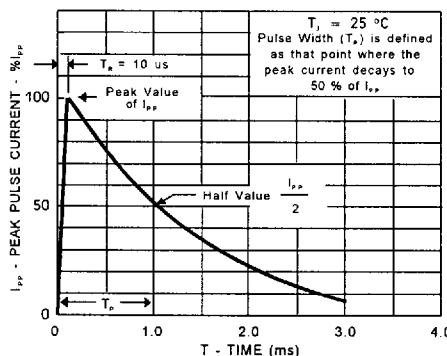


FIGURE 4 - PULSE DERATING CURVE

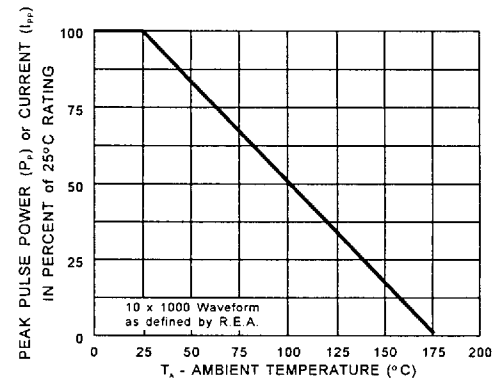

252 Cox Street, Roselle, NJ, USA, 07203-1704 ■ 908 245-2233

Toll-Free (800) 392-2474

Fax: (908) 245-5541

■ 9000378 0000810 892 ■