



DATA SHEET

CM1500~CM15010

HIGH CURRENT SILICON BRIDGE RECTIFIERS

VOLTAGE - 50 to 1000 Volts CURRENT - 15 Amperes


 Recognized File # E111753

FEATURES

- Metal Case for Maximum Heat Dissipation.
- Surge Overload Ratings to 400 Amperes.
- These bridges are on the U/L Recognized Products List for currents of 15 amperes.

MECHANICAL DATA

Case: Metal
 Terminals: Plated 25" FASTON
 Mounting Position: Any
 Weight: 1.0 ounce, 30 gram

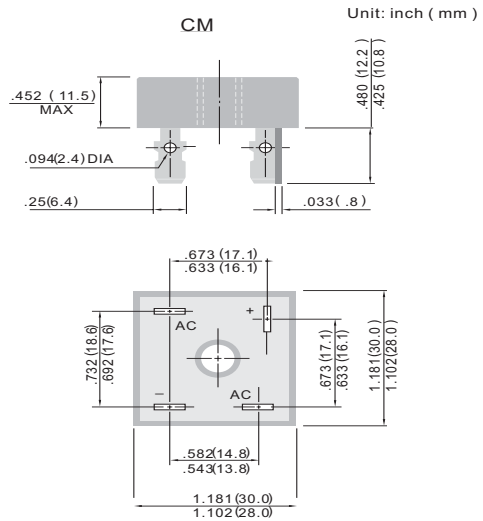

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, Resistive or inductive load.
 For capacitive load, derate current by 20%

	CM1500	CM1501	CM1502	CM1504	CM1506	CM1508	CM15010	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Bridge input Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Current $T_A=55^\circ\text{C}$	15.0							A
Non-repetitive Peak Forward Surge Current , rated load	300							A
Maximum Forward Voltage per Bridge Element Specified Current at 7.5A	1.2							V
Maximum Reverse Current at Rated DC Blocking Voltage per element	10.0							μA
I^2t Rating for fusing ($t < 8.35$ ms)	374							A^2S
Typical Thermal resistance (Fig 3) $R_{\theta\text{JC}}$	2.5							$^\circ\text{C}/\text{W}$
Operating Temperature Range T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range T_A	-55 to +150							$^\circ\text{C}$

NOTES: *Unit mounted on metal heat-sink



RATING AND CHARACTERISTIC CURVES

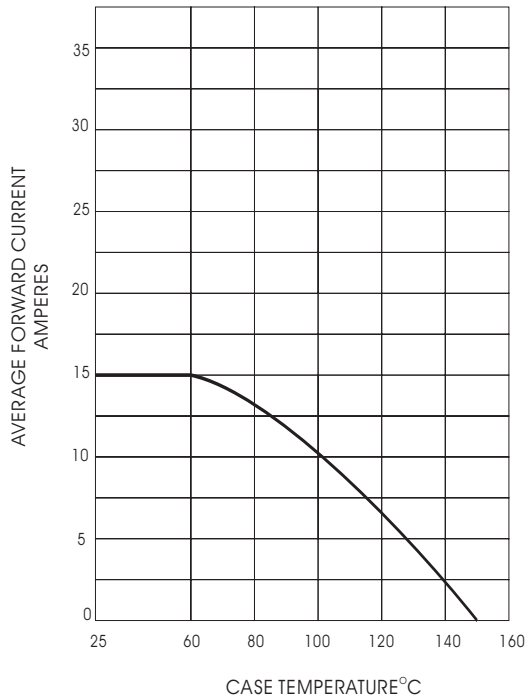


Fig. 1- OUTPUT CURRENT VS. CASE TEMPERATURE
RESISTIVE OR INDUCTIVE LOAD $T_J = 150^{\circ}\text{C}$

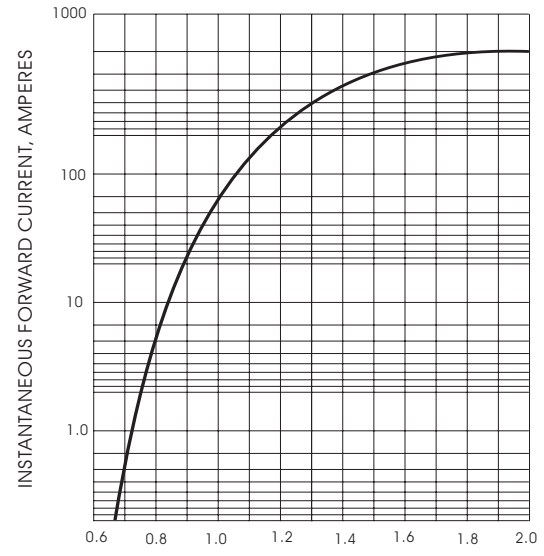


Fig. 2- TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS
AT $T_J = 25^{\circ}\text{C}$

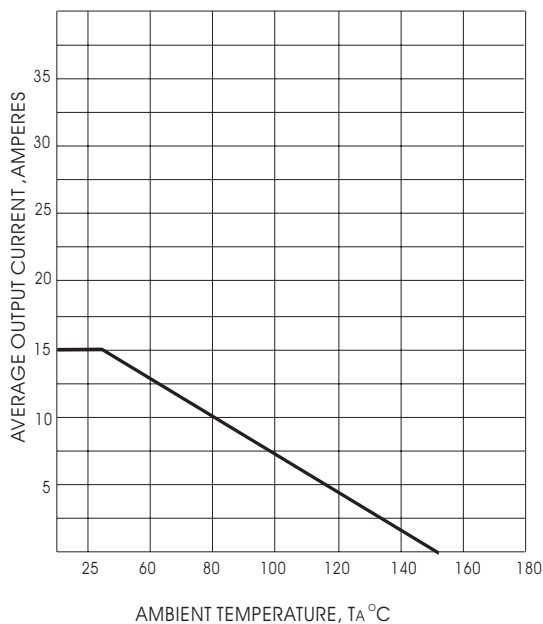


Fig. 3- OUTPUT CURRENT VS. AMBIENT TEMPERATURE
RESISTIVE OR INDUCTIVE LOAD
BRIDGE MOUNTED ON A 8" x 8" ALUMINUM PLATE 25" THICK

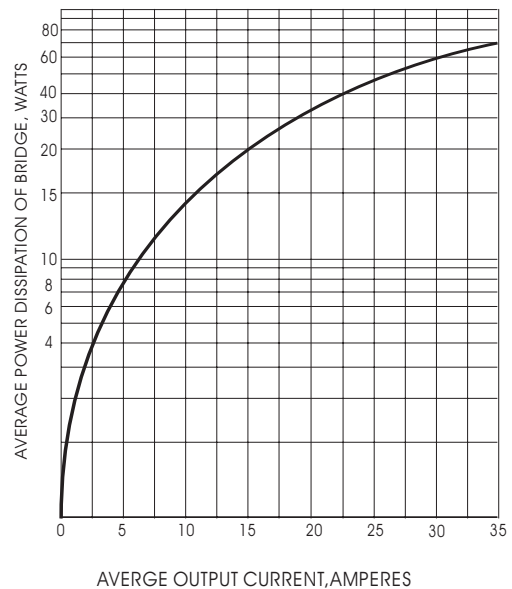


Fig. 4- POWER DISSIPATION VS. AVERAGE OUTPUT
CURRENT RESISTIVE OR INDUCTIVE LOAD
 $T_J = 150^{\circ}\text{C}$