

SURFACE MOUNT SCHOTTKY BARRIER DIODES

VOLTAGE 20 to 40 Volts

CURRENT 0.5 Amperes

FEATURES

- Low turn-on voltage
- Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.


MECHANICAL DATA

- Case: SOD-123, Molded Plastic
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagram Below
- Approx. Weight: 0.008 grams
- Mounting Position: Any




MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Parameter	Symbol	SS0520	SS0530	SS0540	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	V
Maximum RMS Voltage	V _{RMS}	14	21	28	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	V
Maximum Average Forward Current at Ta=25°C	I _{AV}	0.5	0.5	0.5	A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	5.5	5.5	5.5	A
Maximum Instantaneous Forward Voltage at 0.1A 0.5A	V _F	0.3 0.385	0.375 0.430	- 0.51	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	0.075 @ V _R =10 0.25 @ V _R =20	0.02 @ V _R =15 0.13 @ V _R =30	0.01 @ V _R =20 0.02 @ V _R =40	mA
Maximum Thermal Resistance	R _{θJL} R _{θJA}		150 206		°C / W
Operating Junction Temperature Range	T _J		-55 TO +125		°C
Storage Temperature Range	T _{STG}		-55 TO +125		°C

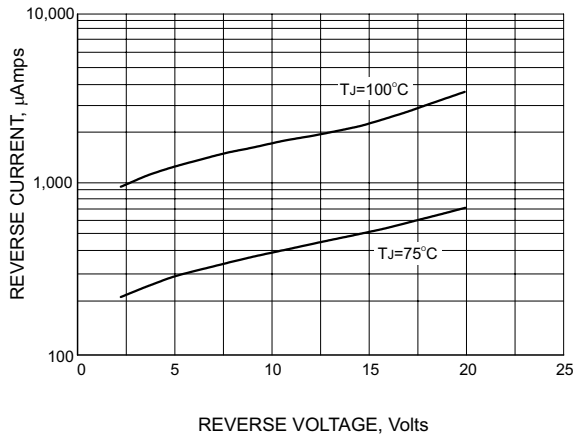


TYPICAL REVERSE CURRENT

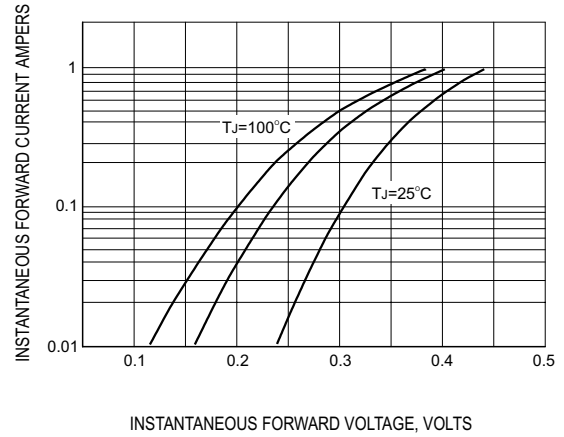


TYPICAL FORWARD VOLTAGE

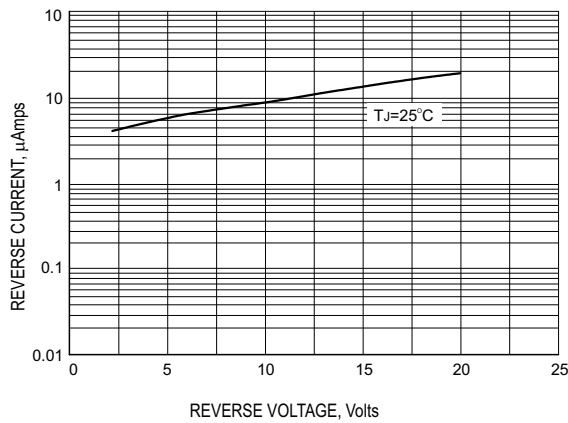

TYPICAL REVERSE CURRENT

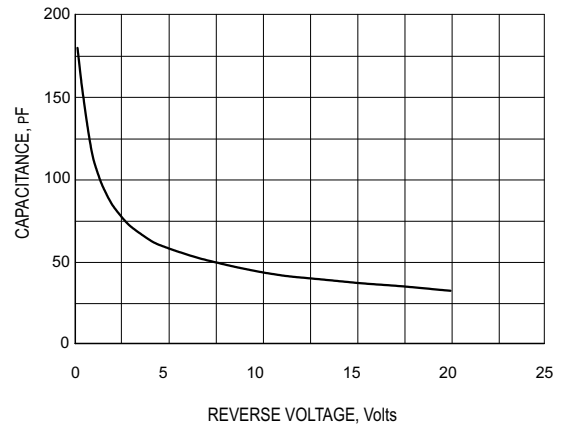


TYPICAL JUNCTION CAPACITANCE

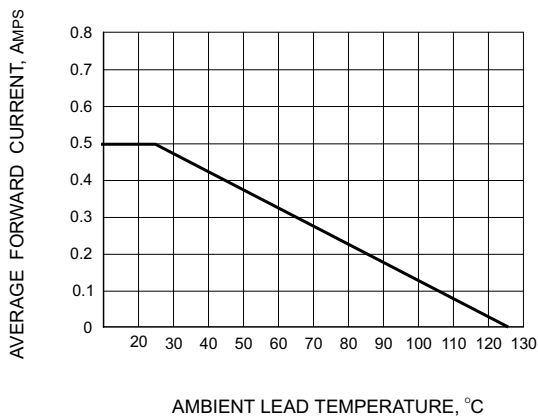

CURRENT DERATING

SOD-123

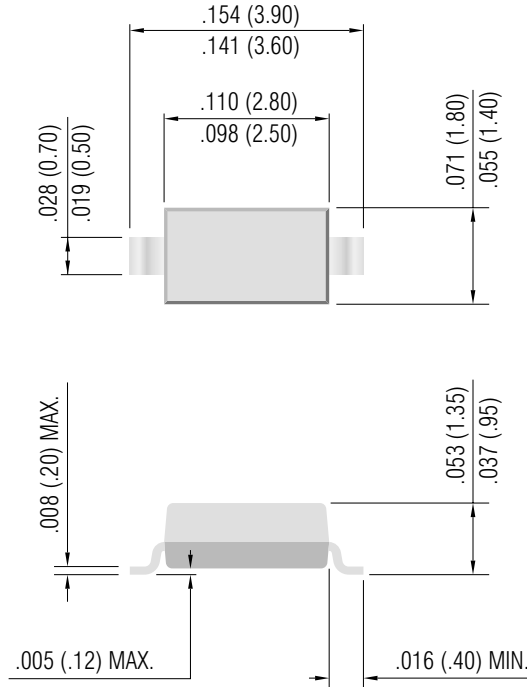

Dimensions in inches and (millimeters)

© Copyright Panjit International Inc. 2001

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.

Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

PanJit International Inc.

TEL:886-7-6213121 Fax:886-7-6213129 Internet: <http://www.panjit.com.tw> email: sales@panjit.com.tw