

# 丸凸形 Round-Top View Type

## φ 2.0 mm Series

Conventional Part No.	Global Part No.	Lighting Color
LN282RPX	LNG282RKR	Red
LN382GPX	LNG382GKG	Green
LN482YPX	LNG482YKX	Amber
LN882RPX	LNG882RKD	Orange


### ■ 絶対最大定格 Absolute Maximum Ratings (T<sub>a</sub> = 25°C)

Lighting Color	P <sub>D</sub> (mW)	I <sub>F</sub> (mA)	I <sub>FP</sub> (mA)*	V <sub>R</sub> (V)	T <sub>opr</sub> (°C)	T <sub>stg</sub> (°C)
Red	70	25	150	4	-25 ~ +85	-30 ~ +100
Green	90	30	150	4	-25 ~ +85	-30 ~ +100
Amber	90	30	150	4	-25 ~ +85	-30 ~ +100
Orange	90	30	150	3	-25 ~ +85	-30 ~ +100

I<sub>FP</sub>の条件は duty 10% Pulse width 1 msec. The condition of I<sub>FP</sub> is duty 10%, Pulse width 1 msec

### ■ 電気的光学的特性 Electro-Optical Characteristics (T<sub>a</sub> = 25°C)

Conventional Part No.	Lighting Color	Lens Color	I <sub>O</sub>		I <sub>F</sub>	V <sub>F</sub>		λ <sub>p</sub>	Δλ	I <sub>F</sub>	I <sub>R</sub>	
			Typ	Min		Typ	Max				Max	V <sub>R</sub>
LN282RPX	Red	Red Diffused	1.0	0.5	15	2.2	2.8	700	100	20	5	4
LN382GPX	Green	Green Diffused	1.2	0.5	20	2.2	2.8	565	30	20	10	4
LN482YPX	Amber	Amber Diffused	2.0	1.0	20	2.2	2.8	590	30	20	10	4
LN882RPX	Orange	Red Diffused	6.0	2.5	20	2.1	2.8	630	40	20	10	3
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

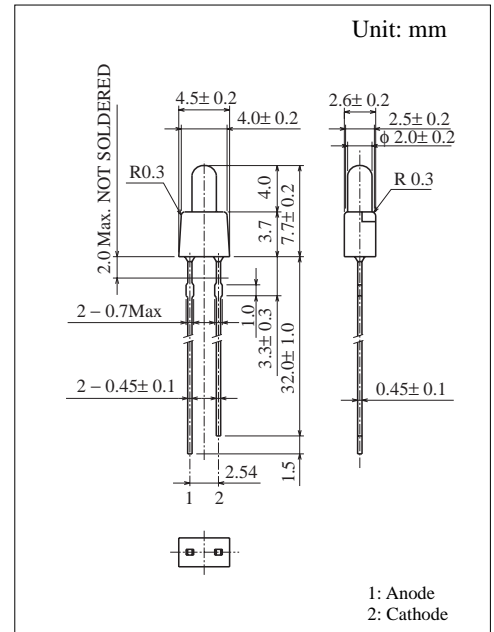

1: Anode  
2: Cathode

