



### C/A-421X, C/A-431X SINGLE DIGIT DISPLAY


Shape	Part No.		Chip		Wave Length $\lambda$ p(nm)	Electro-Optical Characteristics			Fig. No.
	Common Cathode	Common Anode	Raw Material	Emitted Color		Vf(V)20mA		Iv(ucd)10mA	
						Typ.	Max.	Typ.	
	C-421H	A-421H	GaP	Red	700	2.1	2.8	550	D5
	C-421E	A-421E	GaAsP/GaP	Hi. effi Red	635	2.0	2.8	1800	
	C-421G	A-421G	GaP	Green	565	2.1	2.8	1600	
	C-421Y	A-421Y	GaAsP/GaP	Yellow	585	2.1	2.8	1500	
	C-421SR	A-421SR	GaAlAs	Super Red	660	1.8	2.4	21000	
	C-431H	A-431H	GaP	Red	700	2.1	2.8	550	D6
	C-431E	A-431E	GaAsP/GaP	Hi. effi Red	635	2.0	2.8	2000	
	C-431G	A-431G	GaP	Green	565	2.1	2.8	2000	
	C-431Y	A-431Y	GaAsP/GaP	Yellow	585	2.1	2.8	1600	
	C-431SR	A-431SR	GaAlAs	Super Red	660	1.8	2.4	21000	

Fig.D5


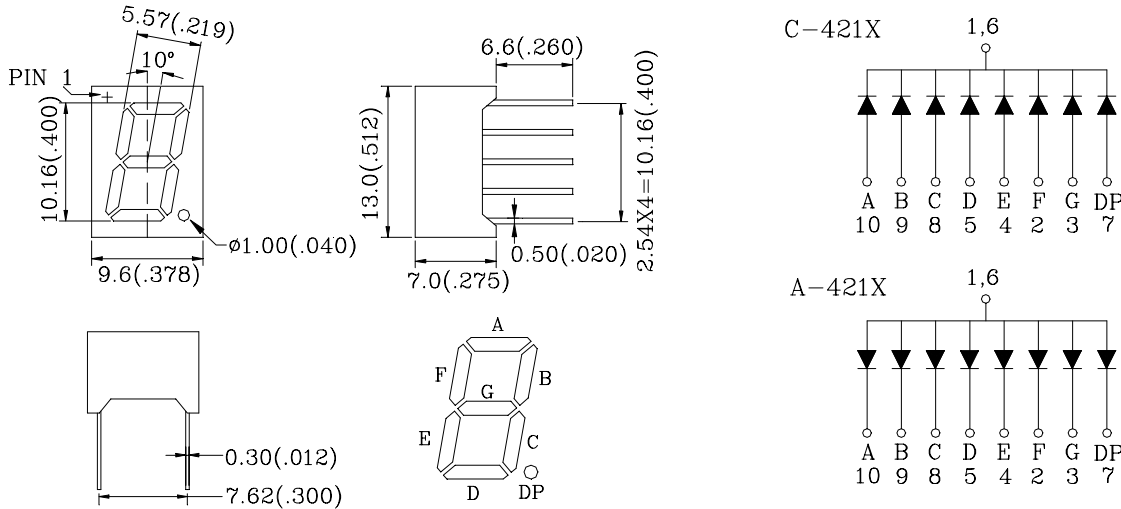


Fig.D6

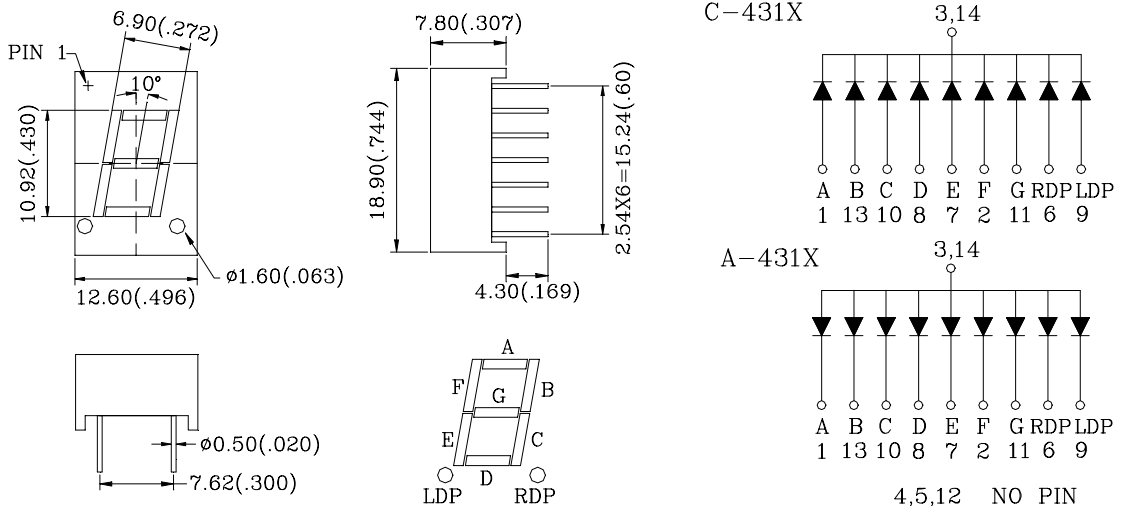

1.All dimension are in millimeters (inches).  
 2.Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise specified.