




**POWER MATE
TECHNOLOGY CO.,LTD.**

VKC03-SERIES

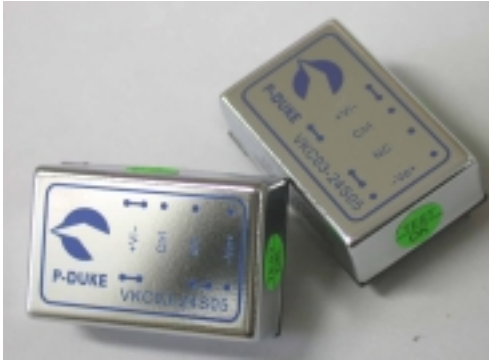

UL E193009
TUV R3-50007936
CB JPTUV-003641
CE MARK

- 3 WATTS REGULATED OUTPUT POWER
- 4:1 WIDE INPUT VOLTAGE RANGE
- INTERNATIONAL SAFETY STANDARD APPROVAL
- FIVE-SIDED SHIELD
- HIGH EFFICIENCY UP TO 78%
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- OVER CURRENT PROTECTION

The VKC03 offers 3 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature. VKC03 series have 4:1 wide input voltage of 9-36 and 18-75VDC. The VKC03 features 1600VDC of isolation, short-circuit protection and as well as five sided shielding. A safety designed meet to EN60950 and UL1950. All models are particularly suited to telecommunications, industrial, mobile telecom and test equipment applications.

TECHNICAL SPECIFICATION


All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS			
Output power			3 Watts max
Voltage accuracy	Full load and nominal Vin		± 2%
Minimum load (Note 1)			10% of FL
Line regulation	LL to HL at Full Load		± 0.2%
Load regulation	25% to 100% FL	Single Dual	± 0.2% ± 1%
Cross regulation	Asymmetrical load 25% / 100% FL		± 5%
Ripple and noise	20MHz bandwidth		50mVp-p
Temperature coefficient			±0.02% / °C, max
Transient response recovery time	25% load step change		200uS
Over load protection	% of FL at nominal input		180% typ
Short circuit protection			Continuous, automatic recovery
INPUT SPECIFICATIONS			
Input voltage range	24V nominal input (Note 2) 48V nominal input	9 – 36VDC 18 – 75VDC	
Input filter			Pi type
Input surge voltage	24V input 100mS max	50VDC 100VDC	
Input reflected ripple (Note 3)	Nominal Vin and full load		20mA _{p-p}
Start up time	Nominal Vin and constant resistor load		350mS typ
Remote ON/OFF (Note 4)			
	DC-DC ON	Open or 3.5V < Vr < 12V	
	DC-DC OFF	Short or 0V < Vr < 1.2V	
Remote off input current	Nominal input		2.5mA

GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage	Input to Output Input(Output) to Case	DIP SMD	1600VDC, min 1600VDC, min 1000VDC, min
Isolation resistance			10 ⁹ ohms, min
Isolation capacitance			300pF, max
Switching frequency			300KHz, typ
Design meet safety standard			UL1950, EN60950
Case material			Nickel-coated copper
Base material			Non-conductive black plastic
Potting material			Epoxy (UL94-V0)
Dimensions			1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight	DIP SMD		16g (0.55oz) 18g (0.62oz)
MTBF (Note 5)			2.941 x 10 ⁶ hrs

ENVIRONMENTAL SPECIFICATIONS			
Operating temperature	Standard M1 (Note 6)	-25°C ~ +85°C (with derating) -40°C ~ +85°C (non-derating)	
Maximum case temperature			100°C
Storage temperature range			-55°C ~ +105°C
Thermal impedance	Nature convection		20°C/Watt
Thermal shock			MIL-STD-810D
Vibration			10~55Hz, 2G, 30minutes along X,Y and Z
Relative humidity			5% to 95% RH

EMC CHARACTERISTICS			
Conducted emissions	EN55022		Level A
Radiated emissions	EN55022		Level A
ESD	EN61000-4-2		Perf. Criteria2
Radiated immunity	EN61000-4-3		Perf. Criteria2
Fast transient	EN61000-4-4		Perf. Criteria2
Surge	EN61000-4-5		Perf. Criteria2
Conducted immunity	EN61000-4-6		Perf. Criteria2

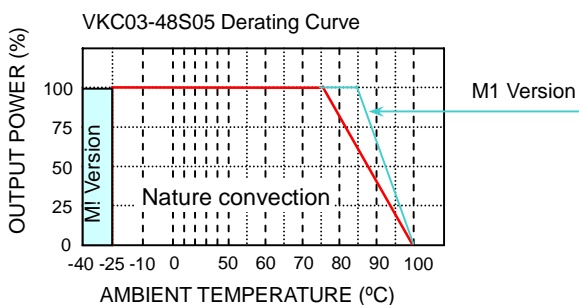




Model Number	Input Range	Output Voltage	Output Current	Input Current ⁽⁷⁾	Eff ⁽⁸⁾ (%)	Capacitor ⁽⁹⁾ Load max
VKC03-24S05	9 – 36 VDC	5 VDC	500mA	147mA	75	1000uF
VKC03-24S12	9 – 36 VDC	12 VDC	250mA	169mA	78	170uF
VKC03-24S15	9 – 36 VDC	15 VDC	200mA	169mA	78	110uF
VKC03-24D05	9 – 36 VDC	± 5 VDC	± 250mA	149mA	74	± 550uF
VKC03-24D12	9 – 36 VDC	± 12 VDC	± 125mA	172mA	77	± 96uF
VKC03-24D15	9 – 36 VDC	± 15 VDC	± 100mA	172mA	77	± 47uF
VKC03-48S05	18 – 75 VDC	5 VDC	500mA	74mA	75	1000uF
VKC03-48S12	18 – 75 VDC	12 VDC	250mA	85mA	78	170uF
VKC03-48S15	18 – 75 VDC	15 VDC	200mA	86mA	77	110uF
VKC03-48D05	18 – 75 VDC	± 5 VDC	± 250mA	75mA	74	± 550uF
VKC03-48D12	18 – 75 VDC	± 12 VDC	± 125mA	86mA	77	± 96uF
VKC03-48D15	18 – 75 VDC	± 15 VDC	± 100mA	85mA	78	± 47uF

- Note
- The VKC03 series required a minimum 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
 - Simulated source impedance of 12uH. 12uH inductor on series with +Vin.
 - Start up voltage : 10 Vdc
 - The ON/OFF control pin voltage is referenced to negative input.
 - BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C. (Ground fixed and controlled environment)
 - M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard.
 - Maximum value at nominal input voltage and full load of standard type.
 - Typical value at nominal input voltage and full load
 - Test by minimum Vin and constant resistor load.

Suffix-SMD

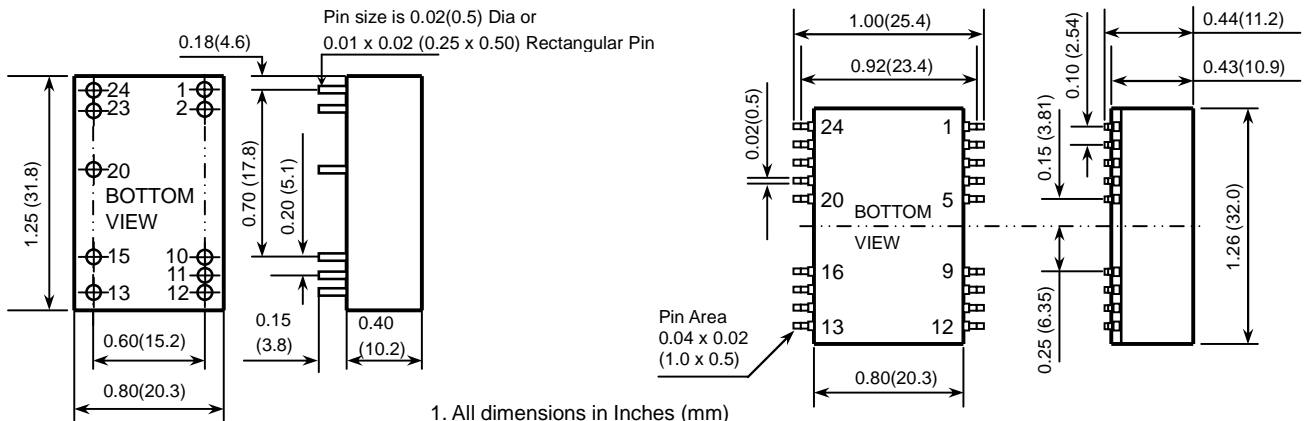

DIP PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT	24	- INPUT	- INPUT
2	+ INPUT	+ INPUT	23	- INPUT	- INPUT
			20	CTRL	CTRL
10	NC	COMMON	15	NC	+ OUTPUT
11	NC	COMMON			
12	- OUTPUT	NC	13	+ OUTPUT	- OUTPUT

SMD PIN CONNECTION					
PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT	24	- INPUT	- INPUT
2	+ INPUT	+ INPUT	23	- INPUT	- INPUT
			20	CTRL	CTRL
10	NC	COMMON	15	NC	+ OUTPUT
11	NC	COMMON			
12	- OUTPUT	NC	13	+ OUTPUT	- OUTPUT
Others	NC	NC	Others	NC	NC