

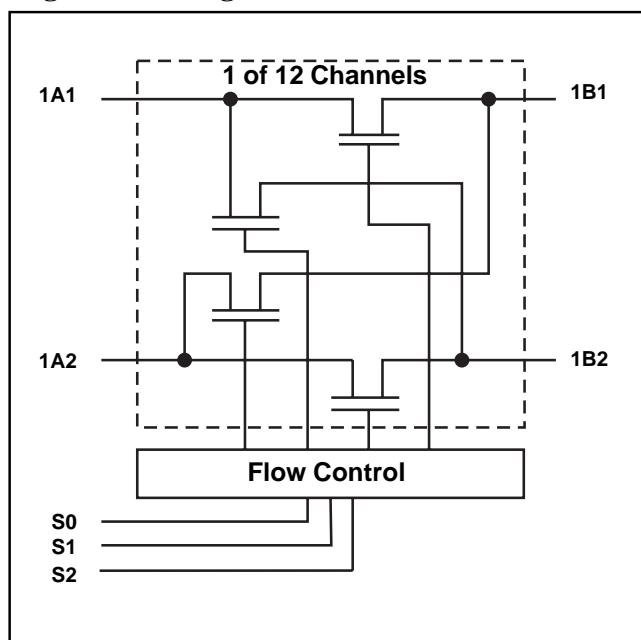
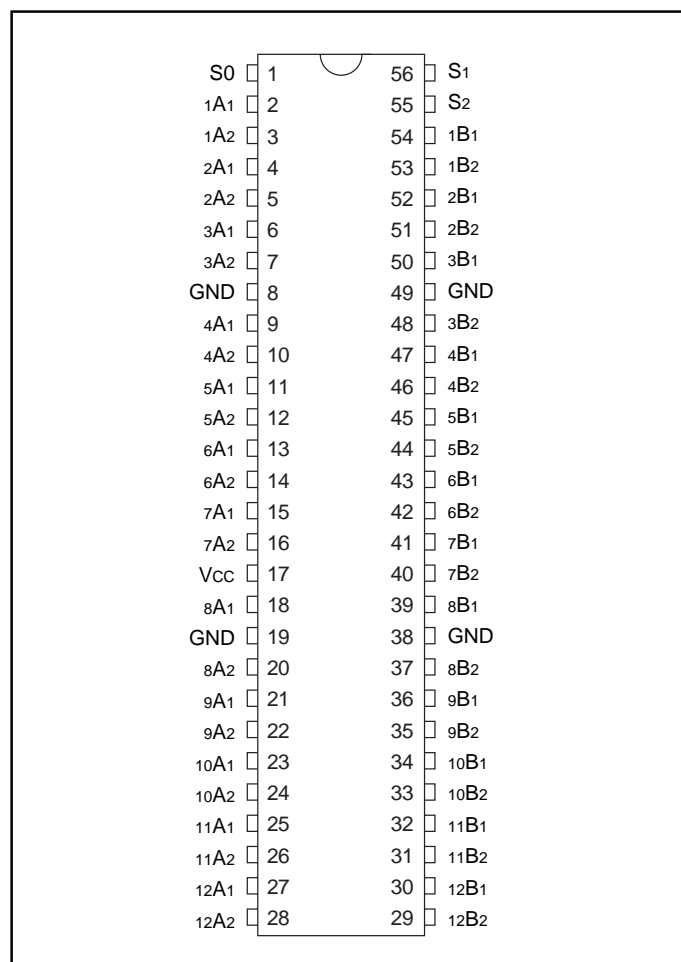
24-Bit Bus-Exchange Switch
Product Features:

- Near-zero propagation delay
- 5Ω switches connect inputs to outputs
- Direct bus connection when switches are ON
- Ultra-low quiescent power (0.2 μA typical)
 - Ideally suited for notebook applications
- Industrial operating temperature: -40°C to +85°C
- Packages available:
 - 56-pin 240-mil wide thin plastic TSSOP (A)
 - 56-pin 300-mil wide plastic SSOP (V)

Product Description:

Pericom Semiconductor's PI5C series of logic circuits are produced in the Company's advanced 0.6 micron CMOS technology.

The PI5C16213 is a 24-bit bus-exchange switch designed with a low ON resistance allowing connections to be made with minimal propagation delay. This device operates as a 24-bit or a 12-bit bus switch, which provides data exchanging between the four signal ports via the data-select (S0-S2) terminals.

Logic Block Diagram

Product Pin Configuration

Truth Table

Function	S2	S1	S0	A1	A2
Disconnect	L	L	L	Z	Z
A1 to B1	L	L	H	B1	Z
A1 to B2	L	H	L	B2	Z
A2 to B1	L	H	H	Z	B1
A2 to B2	H	L	L	Z	B2
A1 to A2 and B2	H	L	H	A2/B2	Z
A1 to B1, A2 to B2	H	H	L	B1	B2
A1 to B2, A2 to B1	H	H	H	B2	B1

NOTE: 1. H = High Voltage Level
 L = Low Voltage Level
 Z = High Impedance

Product Pin Description

Pin Name	I/O	Description
S0-S2	I	Select Inputs
xAx	I/O	Bus A
xBx	I/O	Bus B

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	-55°C to +125°C
Ambient Temperature with Power Applied	-40°C to +85°C
Supply Voltage to Ground Potential (Inputs & Vcc Only)	-0.5V to +7.0V
Supply Voltage to Ground Potential (Outputs & D/O Only)	-0.5V to +7.0V
DC Input Voltage	-0.5V to +7.0V
DC Output Current	120 mA
Power Dissipation	0.5 W

Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

DC Electrical Characteristics (Over the Operating Range, TA = -40°C to +85°C, VCC = 5V ±10%)

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Unit	
V _{IK}	Input HIGH Voltage	Guaranteed Logic HIGH Level	2.0	-	-	V	
V _{IL}	Input LOW Voltage	Guaranteed Logic HIGH Level	-0.5	-	0.8	V	
I _{IH}	Input HIGH Current	VCC = Max., V _{IN} = VCC	-	-	±1	μA	
I _{IL}	Output LOW Current	VCC = Max., V _{IN} = GND	-	-	±1		
I _{OZH}	High Impedance Output Current	0 ≤ A, B ≤ VCC I _I = 30 mA,	-	-	±1		
V _{IK}	Clamp Diode Voltage	VCC = Min., I _{IN} = -18mA I _I = 15 mA	-	-0.7	-1.2	V	
I _{OS}	Short Circuit Current	A(B) = 0V, B (A) = VCC I _I = 30 mA,	100	-	-	mA	
V _H	Input Hysteresis at Control Pins	I _I = 15 mA	-	150	-	mV	
R _{ON}	Switch On Resistance ⁽⁴⁾	VCC = Min., V _{IN} = 0.0V, I _{ON} = 15mA	16214	-	5	7	Ω
			162214	20	28	40	
		VCC = Min., V _{IN} = 2.4V, I _{ON} = 15mA	16214	-	-	12	
			162214	20	35	48	

Capacitance (TA = 25°C, f = 1 MHz)

Parameters ⁽⁵⁾	Description	Test Conditions	Typ	Max.	Units
C _{IN}	Input Capacitance	V _{IN} = 0V	—	6	pF
C _{OFF}	A/B Capacitance, Switch Off	V _{IN} = 0V	—	6	pF
C _{ON}	A/B Capacitance, Switch On	V _{IN} = 0V	—	8	pF

Notes:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device type.
2. Typical values are at VCC = 5.0V, TA = 25°C ambient and maximum loading.
3. Not more than one output should be shorted at one time. Duration of the test should not exceed one second.
4. Measured by the voltage drop between A and B pin at indicated current through the switch. ON resistance is determined by the lower of the voltages on the two (A,B) pins.
5. This parameter is determined by device characterization but is not production tested.

Recommended Operating Conditions

Parameters	Description	Test Conditions ⁽¹⁾	Min.	Typ ⁽²⁾	Max.	Units
VCC	Supply voltage		4.5		5.5	V
VIH	High-level input voltage		2			V
VIL	Low-level input voltage		-0.5		0.8	V
TA	Operating free-air temperature		-40		85	C°

Notes:

1. For conditions shown as Max. or Min., use appropriate value specified under Electrical Characteristics for the applicable device.
2. Typical values are at Vcc = 5.0V, +25°C ambient.
3. Per TTL driven input (VIN = 3.4V, control inputs only); A and B pins do not contribute to Icc.
4. This current applies to the control inputs only and represent the current required to switch internal capacitance at the specified frequency. The A and B inputs generate no significant AC or DC currents as they transition. This parameter is not tested, but is guaranteed by design.

PIC16213 Switching Characteristics over Operating Range

Parameters	From (INPUT)	To (OUTPUT)	VCC = 5 V ± 0.5 V		Units
			Min.	Max.	
tPD	A or B	B or A		0.25	ns

Notes:

1. See test circuit and wave forms.
2. This parameter is guaranteed but not tested on Propagation Delays.
3. The bus switch contributes no propagational delay other than the RC delay of the ON resistance of the switch and the load capacitance. The time constant for the switch alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagational delay to the system. Propagational delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.