


# DATA SHEET



## **BYD77 series** Ultra fast low-loss controlled avalanche rectifiers

Product specification  
Supersedes data of December 1991  
File under Discrete Semiconductors, SC01

1996 May 24

# Ultra fast low-loss controlled avalanche rectifiers

## BYD77 series

### FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Shipped in 8 mm embossed tape
- Smallest surface mount rectifier outline.

### DESCRIPTION

Cavity free cylindrical glass SOD87 package through Implotec™(1) technology. This package is

hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

(1) Implotec is a trademark of Philips.

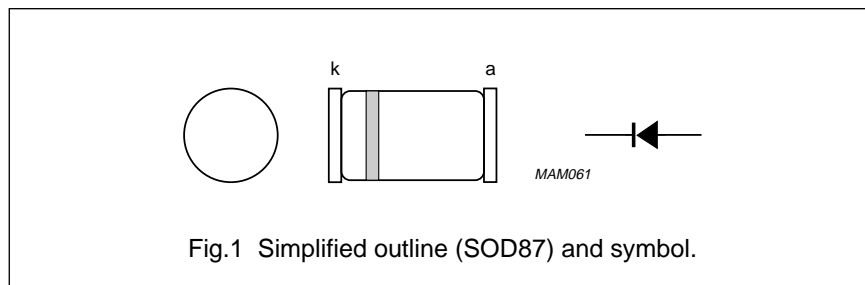


Fig.1 Simplified outline (SOD87) and symbol.

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V <sub>RRM</sub>	repetitive peak reverse voltage				
	BYD77A		–	50	V
	BYD77B		–	100	V
	BYD77C		–	150	V
	BYD77D		–	200	V
	BYD77E		–	250	V
	BYD77F BYD77G		–	300 400	V
V <sub>R</sub>	continuous reverse voltage				
	BYD77A		–	50	V
	BYD77B		–	100	V
	BYD77C		–	150	V
	BYD77D		–	200	V
	BYD77E		–	250	V
	BYD77F BYD77G		–	300 400	V
I <sub>F(AV)</sub>	average forward current	T <sub>tp</sub> = 105 °C; see Figs 2 and 3; averaged over any 20 ms period; see also Figs 10 and 11	–	2.00	A
	BYD77A to D BYD77E to G		–	1.85	A
I <sub>F(AV)</sub>	average forward current	T <sub>amb</sub> = 60 °C; PCB mounting (see Fig.16); see Figs 4 and 5; averaged over any 20 ms period; see also Figs 10 and 11	–	0.85	A
	BYD77A to D BYD77E to G		–	0.80	A

# Ultra fast low-loss controlled avalanche rectifiers

## BYD77 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I <sub>FRM</sub>	repetitive peak forward current	T <sub>tp</sub> = 105 °C; see Figs 6 and 7	–	15	A
	BYD77A to D			13	A
I <sub>FRM</sub>	repetitive peak forward current	T <sub>amb</sub> = 60 °C; see Figs 8 and 9	–	8.5	A
	BYD77E to G			8.0	A
I <sub>FSM</sub>	non-repetitive peak forward current	t = 10 ms half sine wave; T <sub>j</sub> = T <sub>jmax</sub> prior to surge; V <sub>R</sub> = V <sub>RRMmax</sub>	–	25	A
E <sub>RSM</sub>	non-repetitive peak reverse avalanche energy	L = 120 mH; T <sub>j</sub> = 25 °C prior to surge; inductive load switched off	–	10	mJ
T <sub>stg</sub>	storage temperature		–65	+175	°C
T <sub>j</sub>	junction temperature		–65	+175	°C

### ELECTRICAL CHARACTERISTICS

T<sub>j</sub> = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT			
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 1 A; T <sub>j</sub> = T <sub>jmax</sub> ; see Figs 12 and 13	–	–	0.75	V			
	BYD77A to D				0.83	V			
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 1 A; see Figs 12 and 13	–	–	0.98	V			
	BYD77E to G				1.05	V			
V <sub>(BR)R</sub>	reverse avalanche breakdown voltage	I <sub>R</sub> = 0.1 mA							
	BYD77A					55	–	–	V
	BYD77B					110	–	–	V
	BYD77C					165	–	–	V
	BYD77D					220	–	–	V
	BYD77E					275	–	–	V
	BYD77F					330	–	–	V
	BYD77G					440	–	–	V
I <sub>R</sub>	reverse current	V <sub>R</sub> = V <sub>RRMmax</sub> ; see Fig.14	–	–	1	μA			
		V <sub>R</sub> = V <sub>RRMmax</sub> ; T <sub>j</sub> = 165 °C; see Fig.14	–	–	100	μA			
t <sub>rr</sub>	reverse recovery time	when switched from I <sub>F</sub> = 0.5 A to I <sub>R</sub> = 1 A; measured at I <sub>R</sub> = 0.25 A; see Fig.18	–	–	25	ns			
	BYD77A to D				50	ns			
	BYD77E to G								

## Ultra fast low-loss controlled avalanche rectifiers

## BYD77 series

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
C <sub>d</sub>	diode capacitance	f = 1 MHz; V <sub>R</sub> = 0 V; see Fig.15	–	50	–	pF
	BYD77A to D					
	BYD77E to G		–	40	–	pF
$\left  \frac{dI_R}{dt} \right $	maximum slope of reverse recovery current	when switched from I <sub>F</sub> = 1 A to V <sub>R</sub> ≥ 30 V and dI <sub>F</sub> /dt = –1 A/μs; see Fig.17	–	–	4	A/μs
	BYD77A to D					
	BYD77E to G		–	–	5	A/μs

### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-tp</sub>	thermal resistance from junction to tie-point		30	K/W
R <sub>th j-a</sub>	thermal resistance from junction to ambient	note 1	150	K/W





#### Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer ≥40 μm, see Fig.16. For more information please refer to the 'General Part of Handbook SC01'.

Ultra fast low-loss  
controlled avalanche rectifiers



BYD77 series

GRAPHICAL DATA

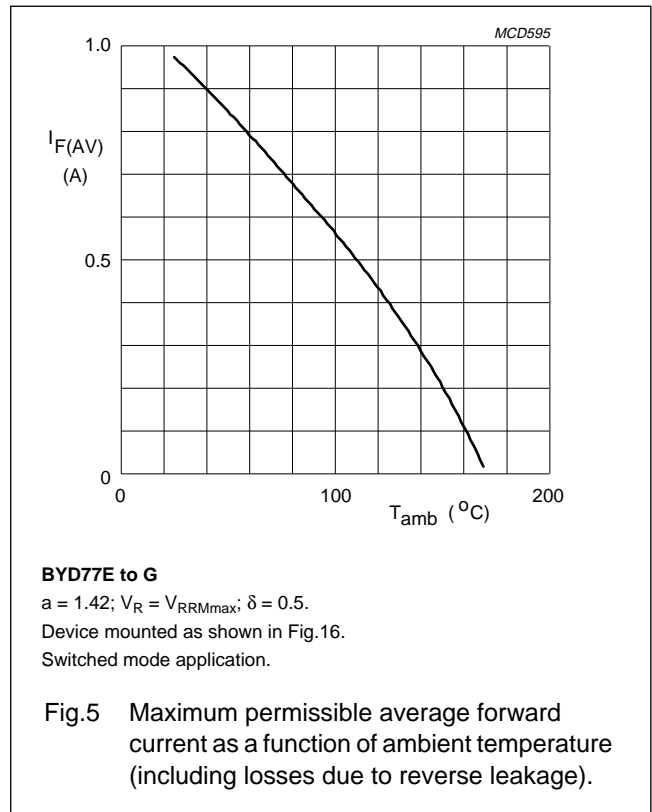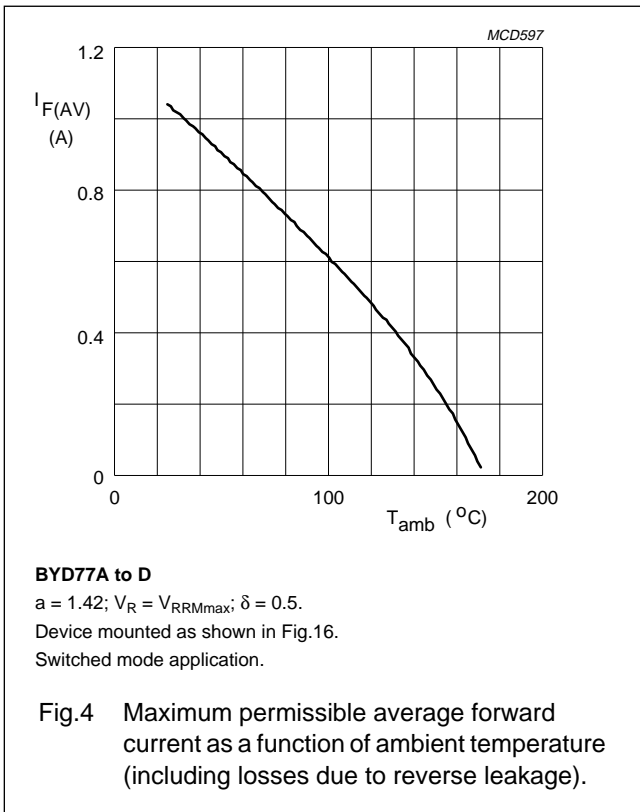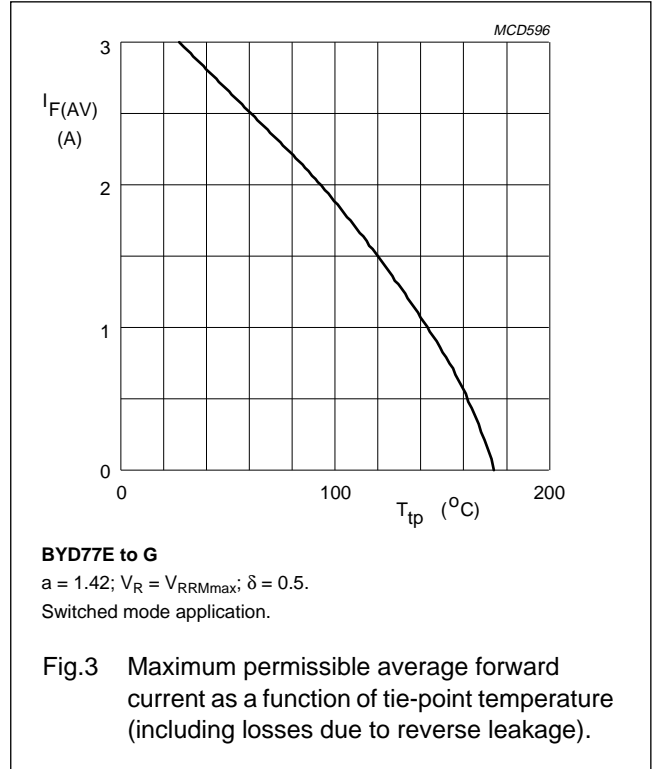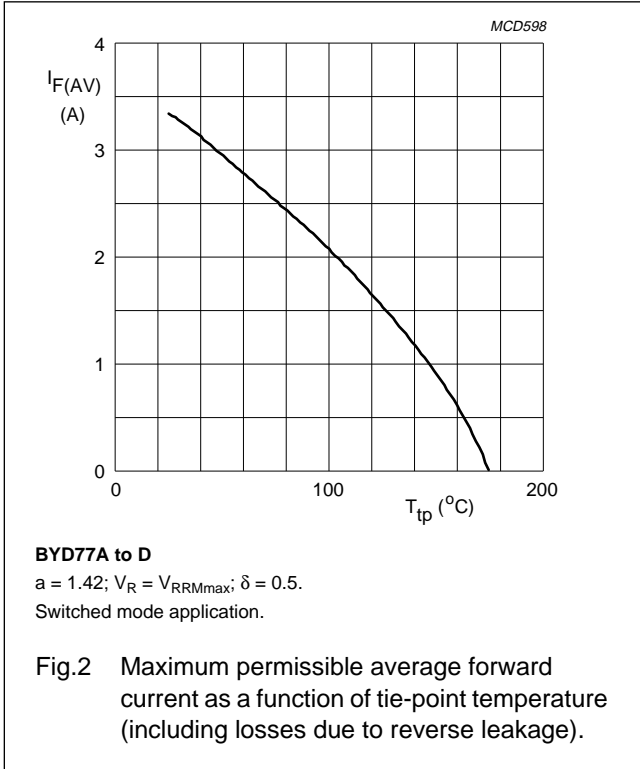



# Ultra fast low-loss controlled avalanche rectifiers

## BYD77 series

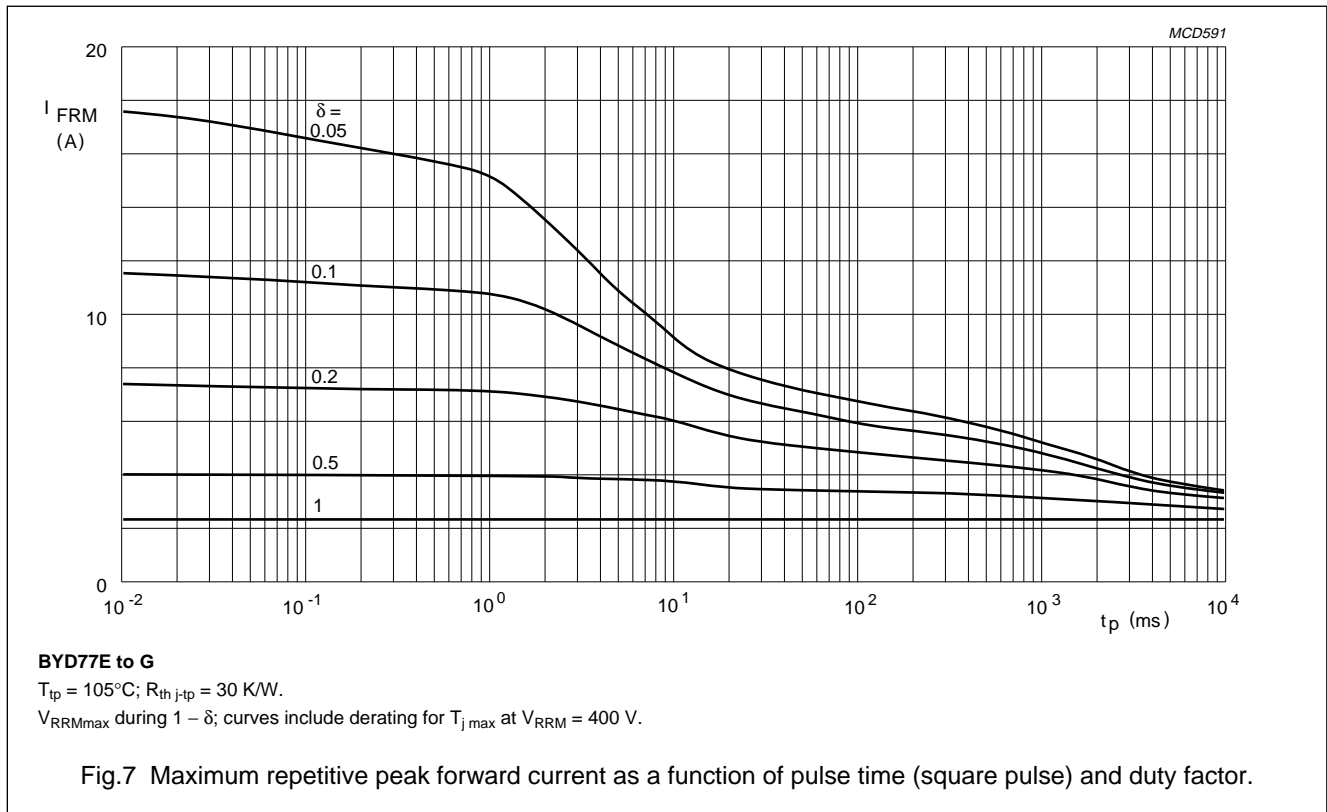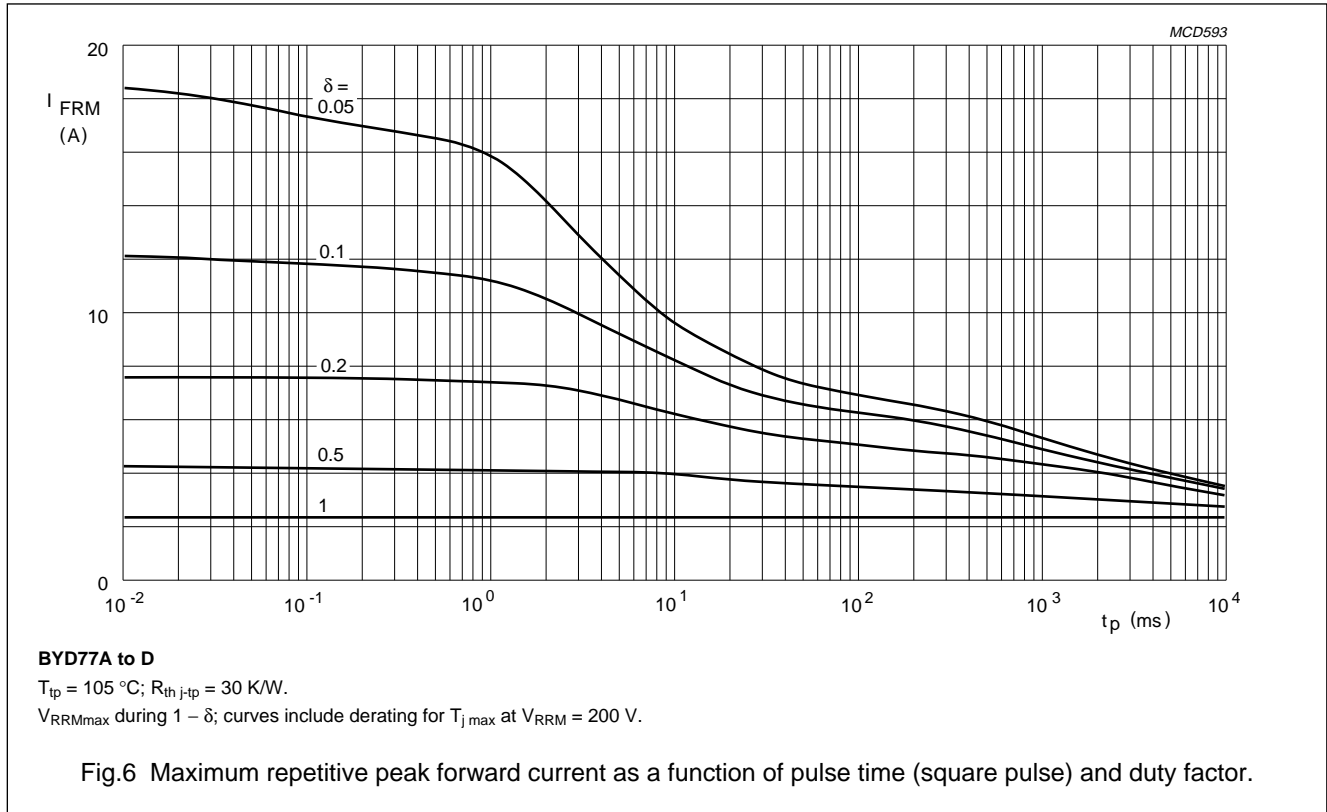





Ultra fast low-loss  
controlled avalanche rectifiers

BYD77 series

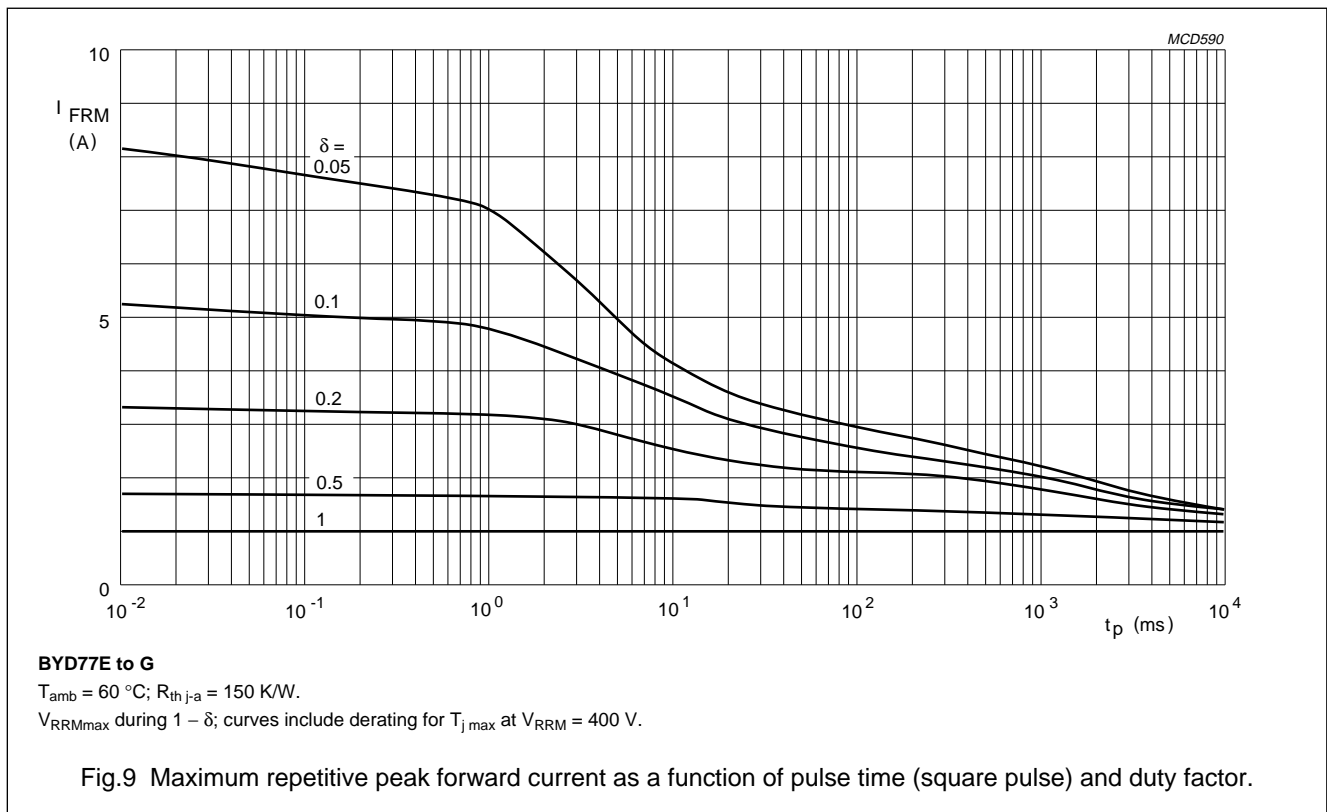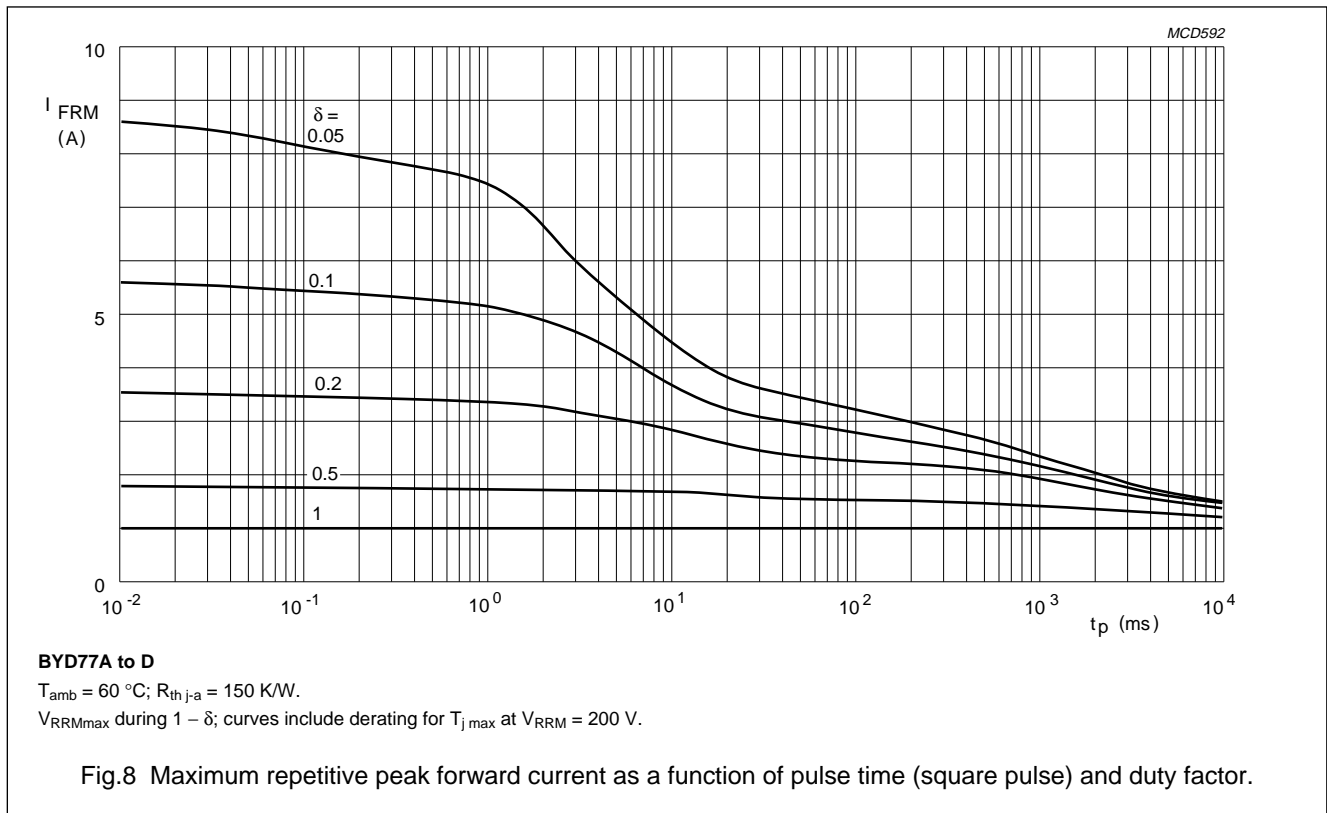

Ultra fast low-loss  
controlled avalanche rectifiers





BYD77 series

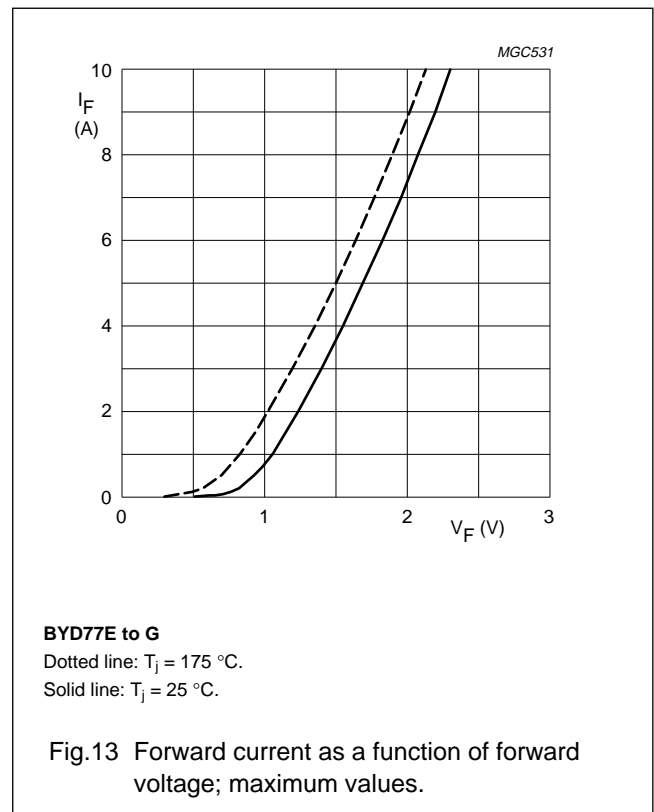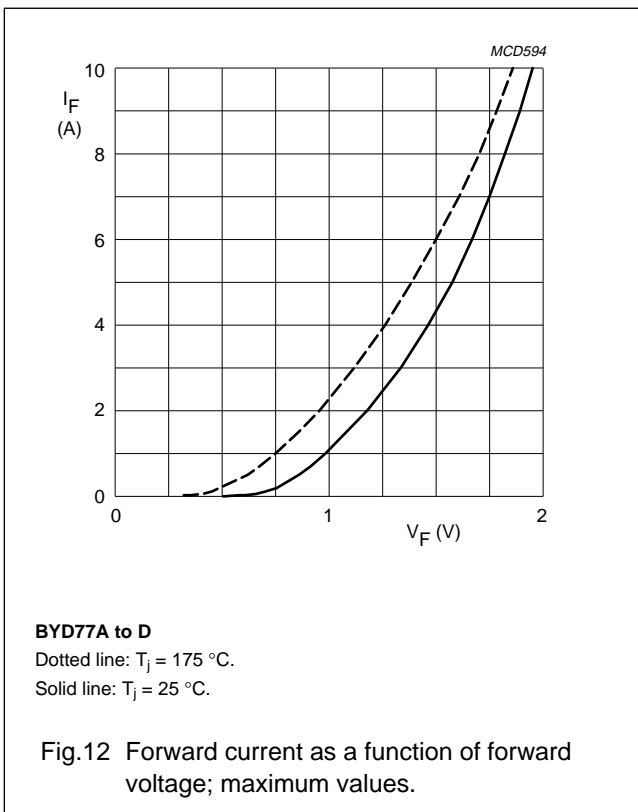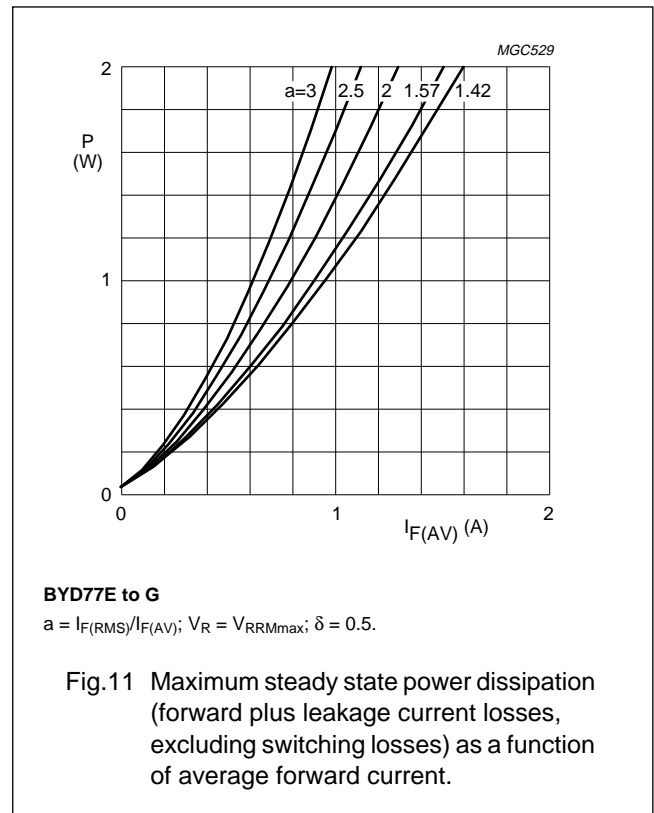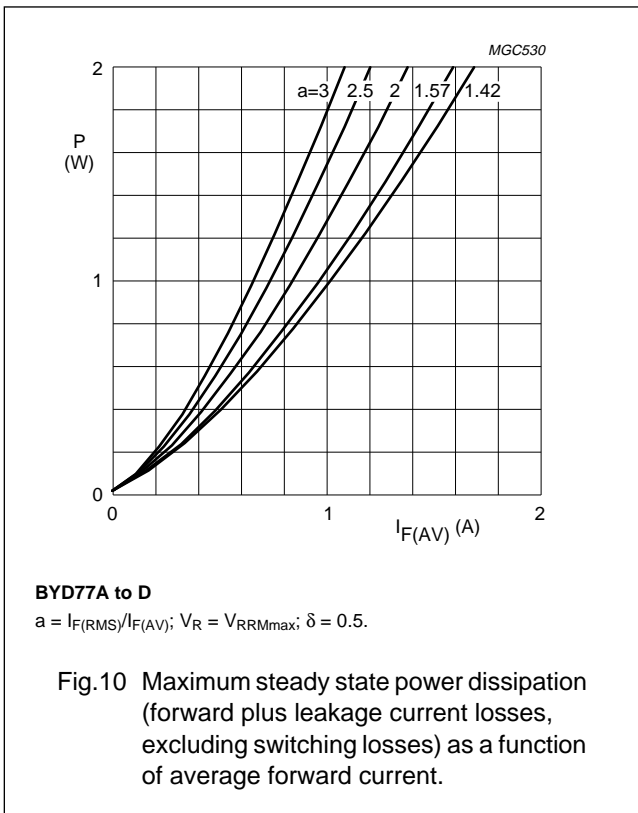





Ultra fast low-loss  
controlled avalanche rectifiers

BYD77 series

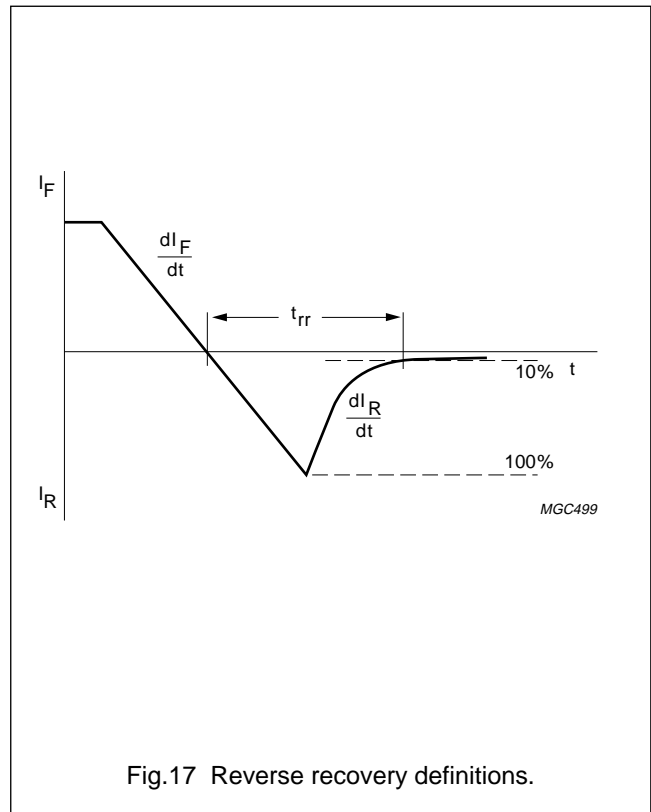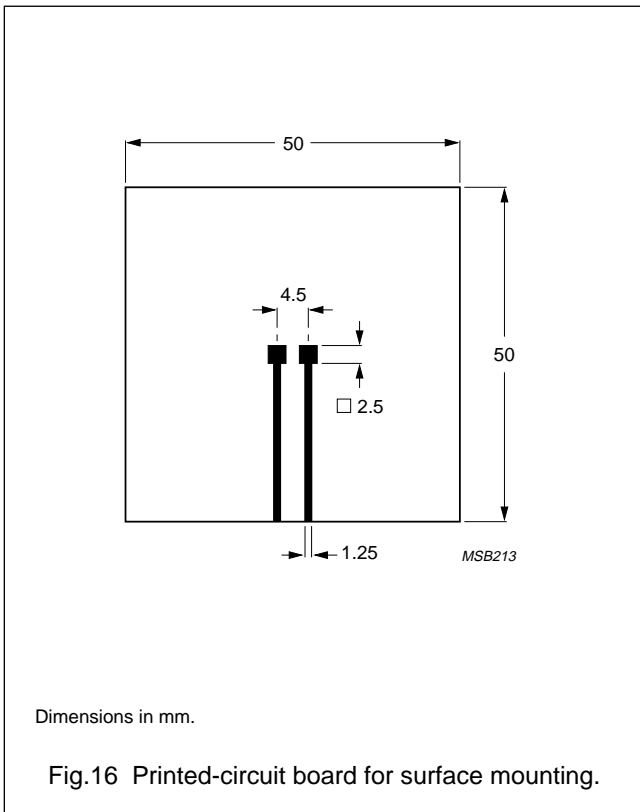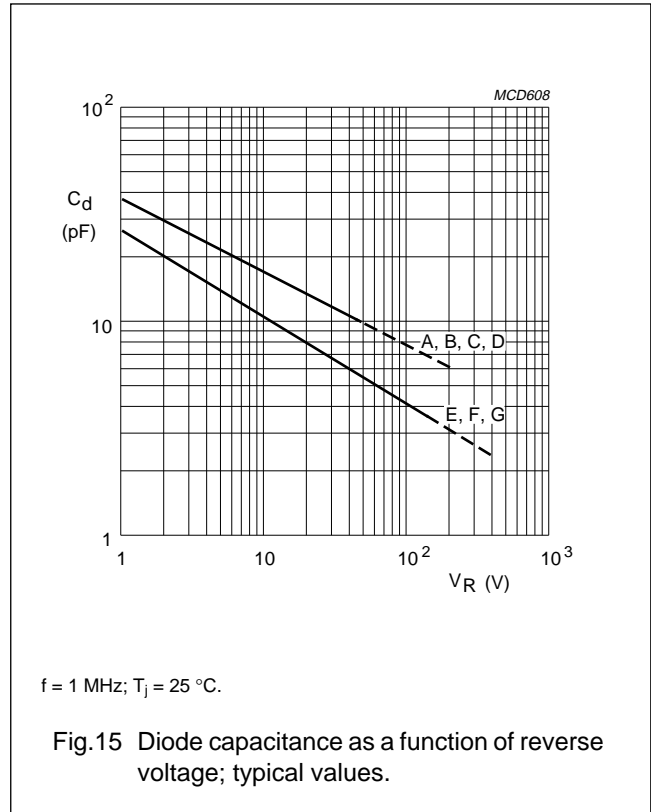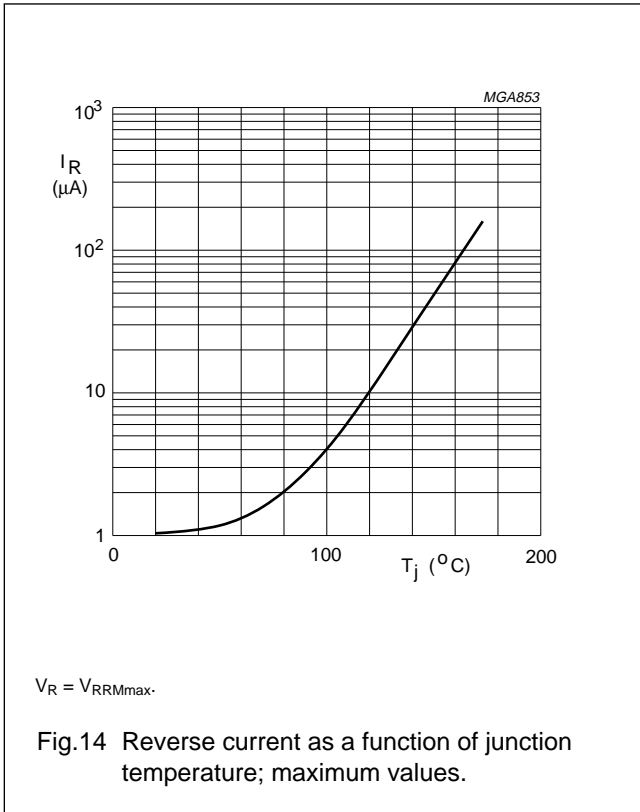

# Ultra fast low-loss controlled avalanche rectifiers

## BYD77 series

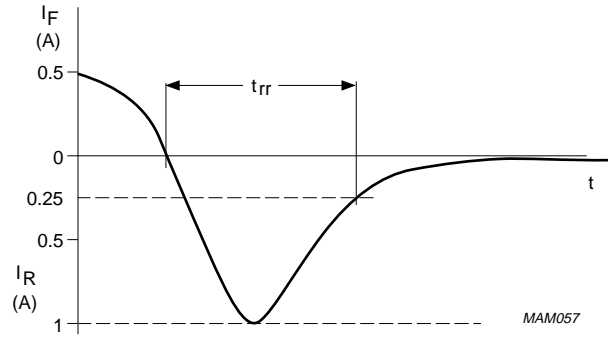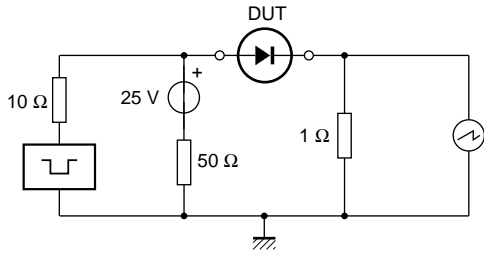


Input impedance oscilloscope: 1 MΩ, 22 pF;  $t_r \leq 7$  ns.  
Source impedance: 50 Ω;  $t_r \leq 15$  ns.

Fig.18 Test circuit and reverse recovery time waveform and definition.

Ultra fast low-loss  
controlled avalanche rectifiers

BYD77 series

PACKAGE OUTLINE

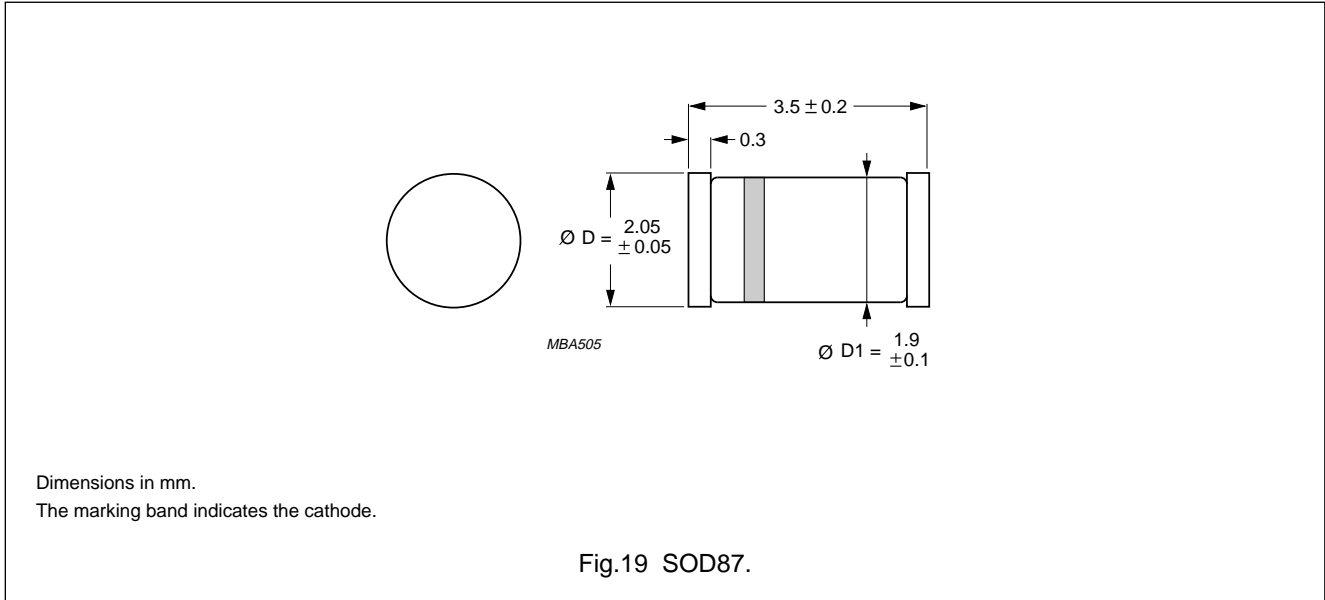

DEFINITIONS

<b>Data Sheet Status</b>	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
<b>Limiting values</b>	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
<b>Application information</b>	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.