


The PJ2800/A series are highly precise, low power consumption, positive voltage regulators manufactured using CMOS and laser trimming technologies. The series provides large currents with a significantly small dropout voltage. The PJ2800/A consists of a current limiter circuit, a driver transistor, a precision reference voltage and an error amplifier. Output voltage is selectable in 0.1V steps between 1.5V to 5.0V, TO-92, SOT-89 and SOT-23 packages are available.

FEATURES

- Input Voltage range is up to 12V
- Dropout Voltage :450mV at 300mA output current
- Guaranteed 300mA output current
- Internal $R_{on}=1.5\Omega$ PMOS draw no base current
- Highly Accurate : $\pm 2\%$, 1.5V to 5V with 0.1V step
- Low quiescent current : $100\mu A$
- Fast transient response
- Good load regulation
- Current limit and thermal shutdown protection
- Ultra Small Packages : TO-92, SOT-89, SOT-23

Applications

- Wireless Communication
- Cameras, video recorders
- Portable games
- Portable AV equipment
- Battery powered equipment
- CD-ROM, DVD, and LAN Card

TO-92	 PJ2800 Pin 1. In 2. Gnd 3. Out 1 2 3	PJ2800A Pin 1. Gnd 2. In 3. Out
SOT-89	 PJ2800 Pin 1. Out 2. Gnd 3. Int 1 2 3	PJ2800A Pin 1. Gnd 2. In 3. Out
		(Heatsink surface connected to Pin 2)
SOT-23	 PJ2800 Pin 1. In 2. Out 3. Gnd 3 1 2	PJ2800A Pin 1. Gnd 2. Out 3. In

ORDER INFORMATION

Device	Operation Temperature	Package
PJ28xxCT	-20°C ~ +85°C	TO-92
PJ28xxCY		SOT-89
PJ28xxCX		SOT-23
PJ28xxACT		TO-92
PJ28xxACY		SOT-89
PJ28xxACX		SOT-23

Note:

1. xx is the index of output voltage, ex. 33=3.3V
2. Available output voltage – 1.5/1.8/2.5/2.8/3.0/3.2/3.3/5.0
3. Contact factory for additional voltage options.

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Input Voltage	V _{cc}	12	V
Package thermal resistance	TO-92	100	°C/W
	SOT-89	100	
	SOT-23	250	
Power Dissipation	TO-92	625	mW
	SOT-89	500	
	SOT-23	150	
Operating Junction Temperature range	Top	-40 ~ +125	°C
Storage Temperature range	Tst	-65 ~ +150	°C

ELECTRICAL CHARACTERISTICS (Ta = +25°C unless otherwise noted)

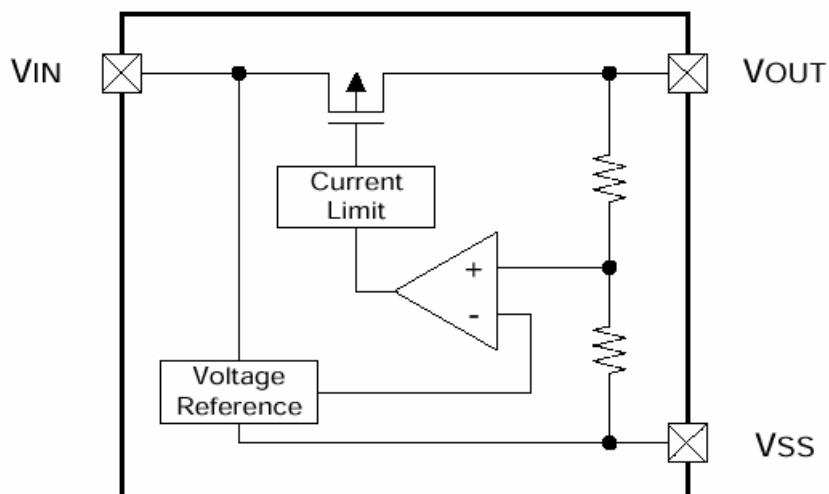
Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage	V _{IN}		--	--	10	V
Output Voltage accuracy	V _{OUT}	V _{IN} =5V, I _{OUT} =1mA	-2	--	+2	%
Current Limit (Note 2)	I _{LIMIT}	V _{IN} =5V, V _{OUT} =0V	350	450	--	mA
Load Regulation (Note 3)	ΔV _{LOAD}	I _{OUT} =1~300mA, V _{IN} =5V	--	1	30	mV
Dropout Voltage (Note 1)	V _{DROP}	I _{OUT} =300mA	--	450	600	mV
Standby Current	V _{STANDBY}	I _{OUT} =0mA, V _{IN} =12V	--	100	110	μA
Line Regulation	ΔV _{LINE}	I _{OUT} =1mA, V _{IN} =4.5~12V	--	2	3	%/V
Output Voltage (Note 4)	ΔV _{OUT}		--	50	150	PPM/°C
Temperature Coefficient						

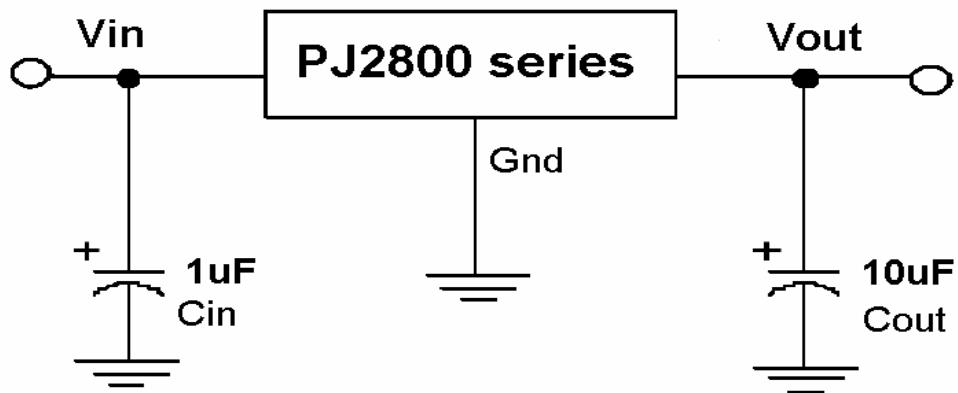
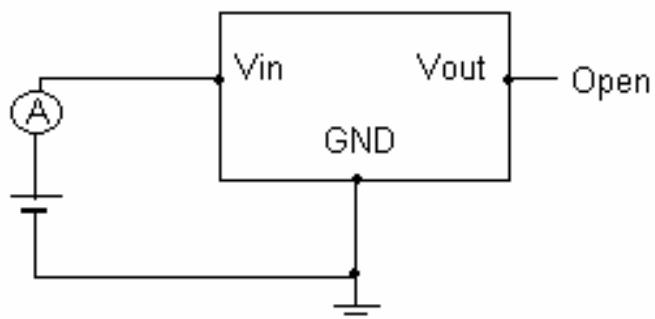
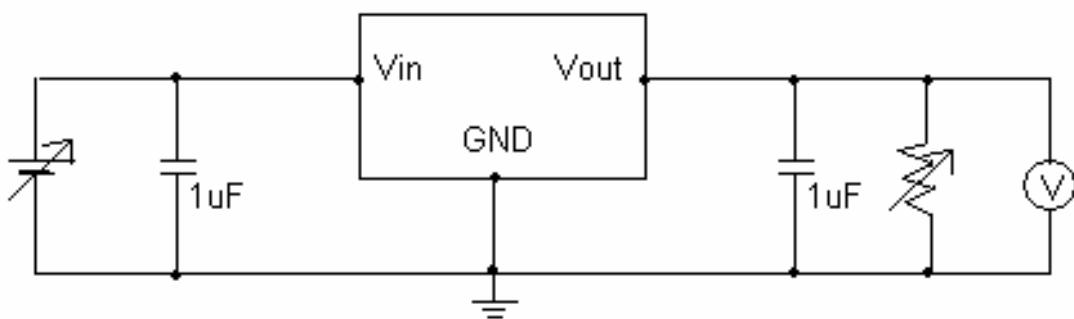
Note 1. Dropout voltage is defined as the input to output differential voltage. Dropout is measured at constant junction temperature by using pulsed ON time, and the criterion is V_{OUT} Inside target value ±2%. This test is skipped at the condition of V_{IN}<3V.

2. Current limit is measured at constant junction temperature by using pulsed testing with a low ON time.

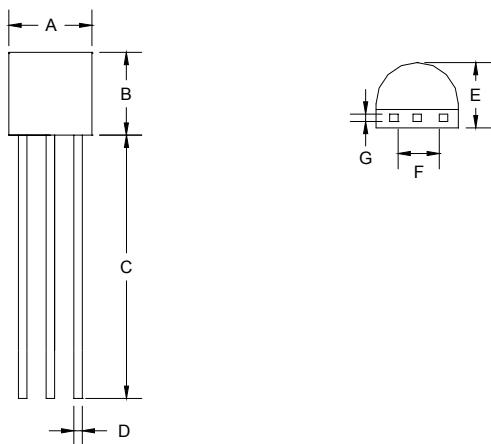
3. Regulation is measured at constant junction temperature by using pulsed testing with a low ON time

4. Guaranteed by design.

BLOCK DIAGRAM

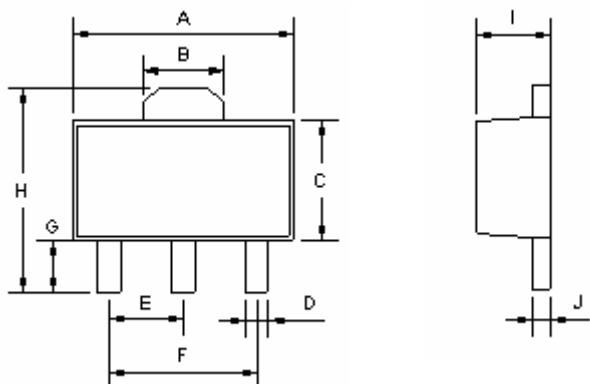
TYPICAL APPLICATION CIRCUIT**MEASURING CIRCUITS****Measuring Circuit 1: Supply Current****Measuring Circuit 2: Output Voltage, Oscillation Check, Line Regulation, Dropout Voltage, Load Regulation**

TO-92 Unit : mm



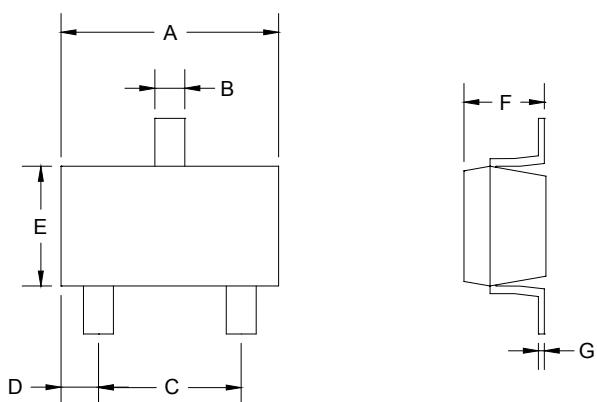
DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.300	4.700	0.169	0.185
B	4.300	4.700	0.169	0.185
C	14.300	14.350	0.563	0.565
D	0.220	0.490	0.008	0.019
E	3.300	3.700	0.129	0.146
F	2.420	2.660	0.095	0.105
G	0.375	0.425	0.014	0.017

TO-89 Unit : mm



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	4.400	4.600	0.173	0.181
B	1.500	1.700	0.059	0.070
C	2.300	2.600	0.090	0.102
D	0.400	0.520	0.016	0.020
E	1.500	1.500	0.059	0.059
F	3.000	3.000	0.118	0.118
G	0.890	1.200	0.035	0.047
H	4.050	4.250	0.159	0.167
I	1.400	1.600	0.055	0.063
J	0.350	0.440	0.014	0.017

SOT-23 Unit : mm



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	2.780	3.030	0.109	0.119
B	0.350	0.450	0.013	0.018
C	1.780	2.030	0.070	0.080
D	0.510	0.610	0.020	0.024
E	1.550	1.650	0.061	0.065
F	0.960	1.240	0.037	0.049
G	0.076	0.127	0.003	0.005