

LOW CAPACITANCE FLIP CHIP ARRAY

APPLICATIONS

- ✓ Cellular Phones
- ✓ Personal Digital Assistant (PDA)
- ✓ Notebook Computers
- ✓ SMART Cards

IEC COMPATIBILITY (EN61000-4)


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns

FEATURES


- ✓ ESD Protection > 25 kilovolts
- ✓ Available in Six Voltage Types Ranging From 3.3V to 24V
- ✓ 200 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- ✓ Low Clamping Voltage
- ✓ Bidirectional Configuration & Monolithic Structure
- ✓ Protects 1 Line
- ✓ **LOW CAPACITANCE**
- ✓ **LOW LEAKAGE CURRENT**

MECHANICAL CHARACTERISTICS

- ✓ Standard EIA Chip Size: 0402
- ✓ Weight 0.73 milligrams (Approximate)
- ✓ Flammability Rating UL 94V-0
- ✓ 8mm Plastic & Paper Tape and Reel Per EIA Standard 481
- ✓ Device Marking On Reel
- ✓ Top Contacts: Solder Bump 0.004" in Height (Nominal)

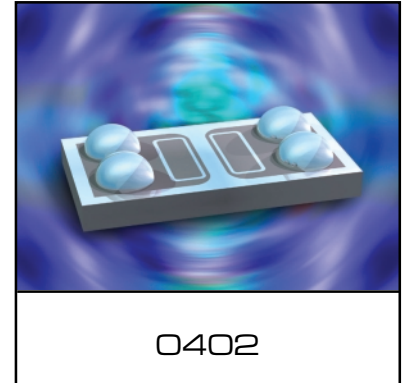

PIN CONFIGURATION

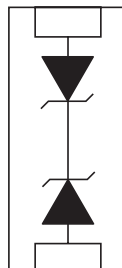


DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ($t_p = 8/20\mu s$) - See Figure 1	P_{PP}	200	Watts
Operating Temperature	T_J	-55°C to 150°C	°C
Storage Temperature	T_{STG}	-55°C to 150°C	°C


ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified						
PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE V_{WM} VOLTS	MINIMUM BREAKDOWN VOLTAGE	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)	MAXIMUM LEAKAGE CURRENT (See Note 2)	TYPICAL CAPACITANCE
		@ 1mA $V_{(BR)}$ VOLTS	@ $I_p = 1A$ V_C VOLTS	@ 8/20 μs $V_C @ I_{PP}$	@ V_{WM} I_D μA	@ 0V, 1 MHz C pF
LC0402FC3.3C	3.3	4.0	7.0	12.5V @ 16A	75*	70
LC0402FC05C	5.9	6.0	11.0	13V @ 15A	10**	35
LC0402FC08C	8.0	8.5	13.2	18V @ 11A	1	32
LC0402FC12C	12.0	13.3	19.8	26.9V @ 7.4A	1	30
LC0402FC15C	15.0	16.7	25.4	34.5V @ 5.8A	1	25
LC0402FC24C	24.0	26.7	37.2	50.6V @ 4A	1	20

Note 1: All devices are bidirectional. Electrical characteristics apply in both directions.
Note 2: *Maximum leakage current < 5 μA @ 2.8V. **Maximum leakage current < 500nA @ 3.3V.





**FIGURE 1
PEAK PULSE POWER VS PULSE TIME**

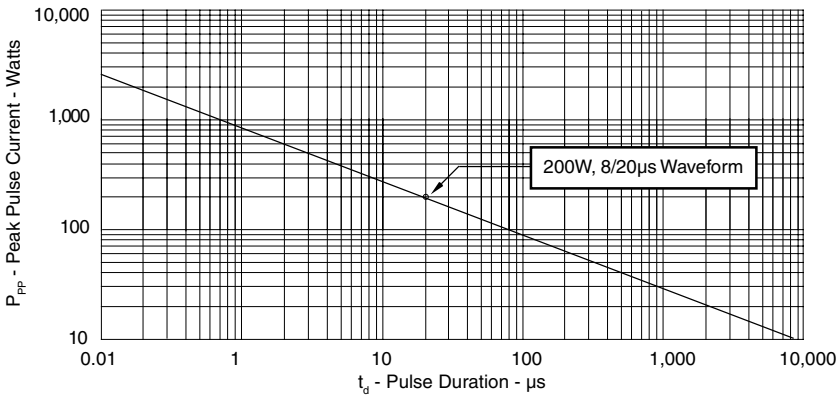



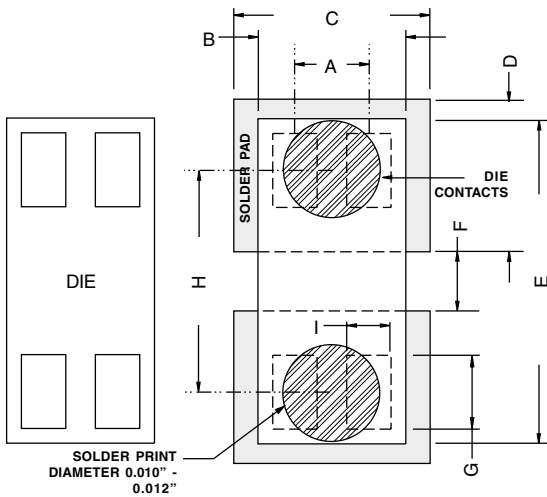

**FIGURE 2
PULSE WAVE FORM**

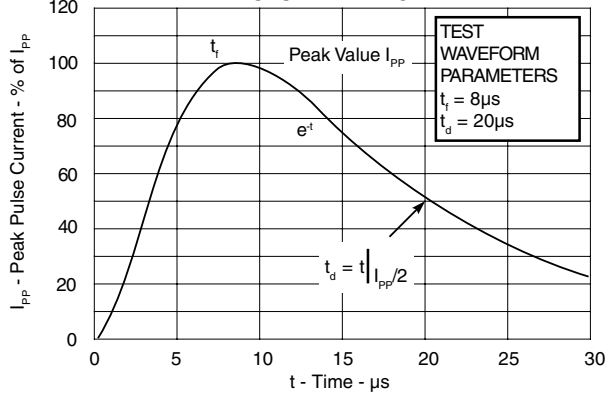

GRAPHS

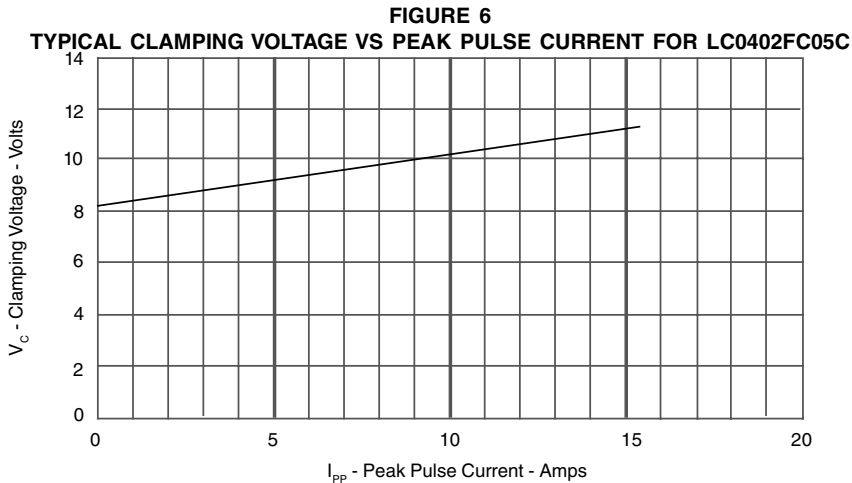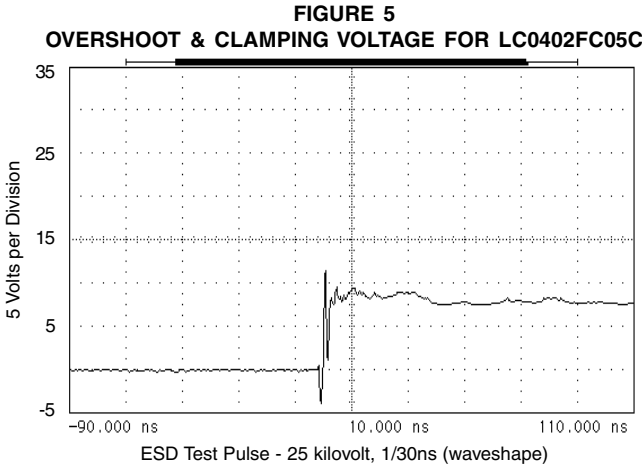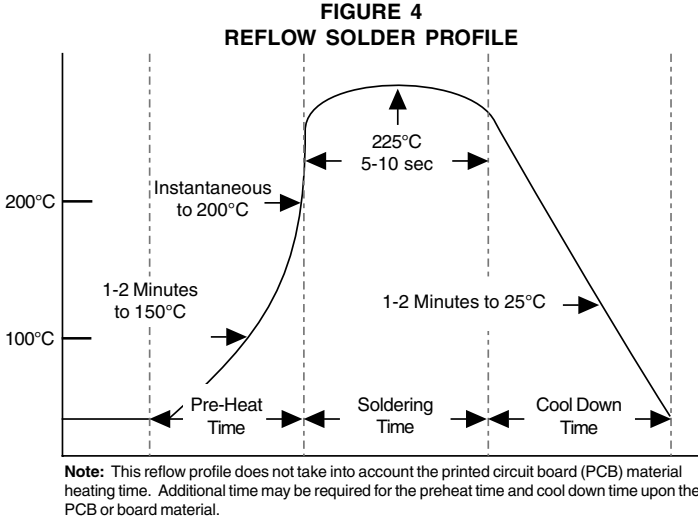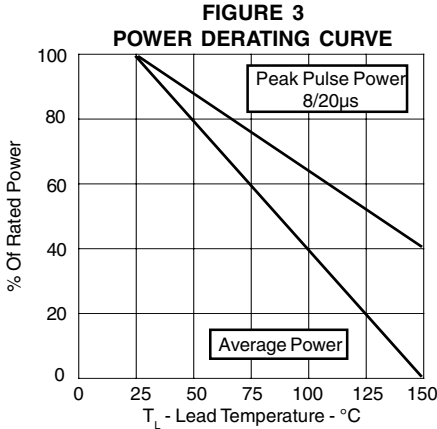

PACKAGE OUTLINE & DIMENSIONS
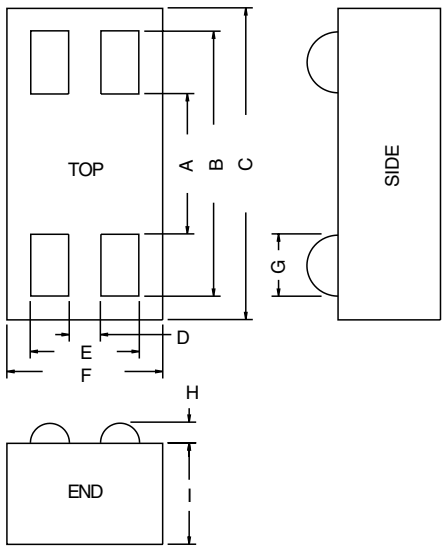
<p style="text-align: center;">PACKAGE OUTLINE</p> 	<p style="text-align: center;">0402</p>  <p style="text-align: center;">PACKAGE DIMENSIONS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">DIM</th> <th style="text-align: center;">MILLIMETERS</th> <th style="text-align: center;">INCHES</th> </tr> </thead> <tbody> <tr><td>A</td><td style="text-align: center;">0.46 NOM</td><td style="text-align: center;">0.018 NOM</td></tr> <tr><td>B</td><td style="text-align: center;">0.86 NOM</td><td style="text-align: center;">0.034 NOM</td></tr> <tr><td>C</td><td style="text-align: center;">0.99 ± 0.0254</td><td style="text-align: center;">0.039 ± 0.001</td></tr> <tr><td>D</td><td style="text-align: center;">0.10 NOM</td><td style="text-align: center;">0.004 NOM</td></tr> <tr><td>E</td><td style="text-align: center;">0.35 NOM</td><td style="text-align: center;">0.014 NOM</td></tr> <tr><td>F</td><td style="text-align: center;">0.483 ± 0.0254</td><td style="text-align: center;">0.019 ± 0.001</td></tr> <tr><td>G</td><td style="text-align: center;">0.20 NOM</td><td style="text-align: center;">0.008 NOM</td></tr> <tr><td>H</td><td style="text-align: center;">0.127 MAX</td><td style="text-align: center;">0.005 MAX</td></tr> <tr><td>I</td><td style="text-align: center;">0.076 MIN</td><td style="text-align: center;">0.003 MIN</td></tr> <tr><td>I</td><td style="text-align: center;">0.406 NOM</td><td style="text-align: center;">0.016 NOM</td></tr> </tbody> </table> <p>NOTES:</p> <ol style="list-style-type: none"> Controlling dimensions in inches. Decimal tolerances for mounting pad and outline: .xxx ± 0.05mm (± 0.002"). Maximum chip size: 1.02 (0.040") by 0.51(0.020"). 	DIM	MILLIMETERS	INCHES	A	0.46 NOM	0.018 NOM	B	0.86 NOM	0.034 NOM	C	0.99 ± 0.0254	0.039 ± 0.001	D	0.10 NOM	0.004 NOM	E	0.35 NOM	0.014 NOM	F	0.483 ± 0.0254	0.019 ± 0.001	G	0.20 NOM	0.008 NOM	H	0.127 MAX	0.005 MAX	I	0.076 MIN	0.003 MIN	I	0.406 NOM	0.016 NOM
DIM	MILLIMETERS	INCHES																																
A	0.46 NOM	0.018 NOM																																
B	0.86 NOM	0.034 NOM																																
C	0.99 ± 0.0254	0.039 ± 0.001																																
D	0.10 NOM	0.004 NOM																																
E	0.35 NOM	0.014 NOM																																
F	0.483 ± 0.0254	0.019 ± 0.001																																
G	0.20 NOM	0.008 NOM																																
H	0.127 MAX	0.005 MAX																																
I	0.076 MIN	0.003 MIN																																
I	0.406 NOM	0.016 NOM																																
<p style="text-align: center;">MOUNTING PAD</p>  <p style="text-align: center;">SOLDER PRINT DIAMETER 0.010" - 0.012"</p>	<p style="text-align: center;">PAD DIMENSIONS</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">DIM</th> <th style="text-align: center;">MILLIMETERS</th> <th style="text-align: center;">INCHES</th> </tr> </thead> <tbody> <tr><td>A</td><td style="text-align: center;">0.23</td><td style="text-align: center;">0.009</td></tr> <tr><td>B</td><td style="text-align: center;">0.48</td><td style="text-align: center;">0.019</td></tr> <tr><td>C</td><td style="text-align: center;">0.69</td><td style="text-align: center;">0.027</td></tr> <tr><td>D</td><td style="text-align: center;">0.46</td><td style="text-align: center;">0.018</td></tr> <tr><td>E</td><td style="text-align: center;">0.99</td><td style="text-align: center;">0.039</td></tr> <tr><td>F</td><td style="text-align: center;">0.20</td><td style="text-align: center;">0.008</td></tr> <tr><td>G</td><td style="text-align: center;">0.20</td><td style="text-align: center;">0.008</td></tr> <tr><td>H</td><td style="text-align: center;">0.66</td><td style="text-align: center;">0.026</td></tr> <tr><td>I</td><td style="text-align: center;">0.13</td><td style="text-align: center;">0.005</td></tr> </tbody> </table> <p>NOTE:</p> <ol style="list-style-type: none"> Top view of tape. Metal contacts are face down in tape package. 	DIM	MILLIMETERS	INCHES	A	0.23	0.009	B	0.48	0.019	C	0.69	0.027	D	0.46	0.018	E	0.99	0.039	F	0.20	0.008	G	0.20	0.008	H	0.66	0.026	I	0.13	0.005			
DIM	MILLIMETERS	INCHES																																
A	0.23	0.009																																
B	0.48	0.019																																
C	0.69	0.027																																
D	0.46	0.018																																
E	0.99	0.039																																
F	0.20	0.008																																
G	0.20	0.008																																
H	0.66	0.026																																
I	0.13	0.005																																
<p>TAPE & REEL ORDERING NOMENCLATURE</p> <ol style="list-style-type: none"> Surface mount product is taped and reeled in accordance with EIA 481. 8mm Plastic Tape: 7 Inch Reels - 5,000 pieces per reel. Ordering Suffix: -T75-1 (i.e., LC0402FC05C-T75-1). 8mm Paper Tape: 7 Inch Reels - 10,000 pieces per reel. Ordering Suffix: -T710-2 (i.e., LC0402FC05C-T710-2). 	<p style="text-align: center;">TAPE & REEL ORIENTATION</p>  <p style="text-align: center;">Single Die - 0402</p> <p>NOTE:</p> <ol style="list-style-type: none"> Preferred: Using 0.1mm (0.004") stencil. <p style="text-align: right;">Outline & Dimensions: Rev 3 - 11/02, 06020</p>																																	

COPYRIGHT © ProTek Devices 2003

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

ProTek Devices
2929 South Fair Lane, Tempe, AZ 85282
Tel: 602-431-8101 Fax: 602-431-2288
E-Mail: sales@protekdevices.com
Web Site: www.protekdevices.com