
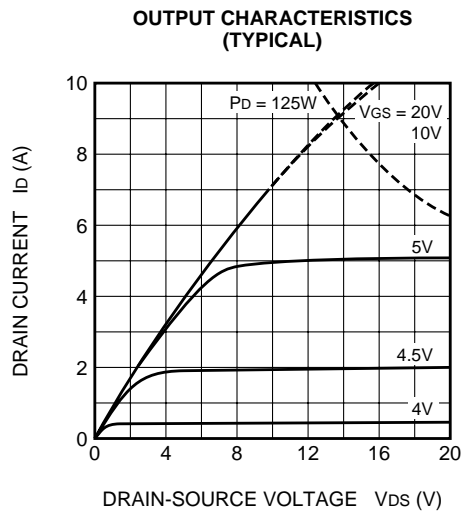
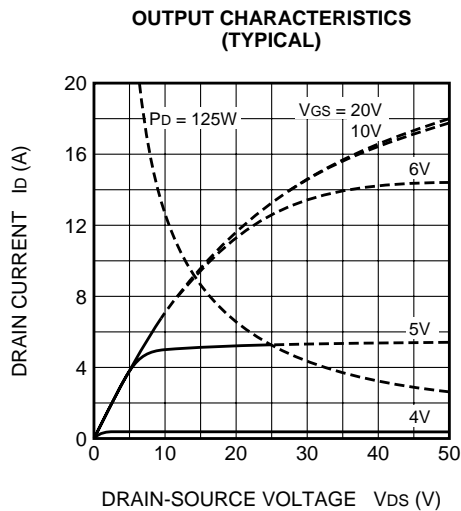
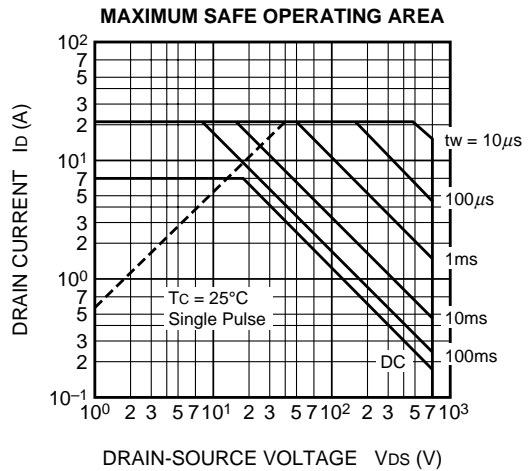


ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------------|----------------------------------|---|--------|------|------|------|
| | | | Min. | Typ. | Max. | |
| V (BR) DSS | Drain-source breakdown voltage | I _D = 1mA, V _{GS} = 0V | 700 | — | — | V |
| V (BR) GSS | Gate-source breakdown voltage | I _{GS} = ±100μA, V _{DS} = 0V | ±3 | — | — | V |
| I _{GSS} | Gate-source leakage current | V _{GS} = ±25V, V _{DS} = 0V | — | — | ±10 | μA |
| I _{DSS} | Drain-source leakage current | V _{DS} = 700V, V _{GS} = 0V | — | — | 1 | mA |
| V _{GS} (th) | Gate-source threshold voltage | I _D = 1mA, V _{DS} = 10V | 2 | 3 | 4 | V |
| r _{DS} (ON) | Drain-source on-state resistance | I _D = 3A, V _{GS} = 10V | — | 1.4 | 1.82 | Ω |
| V _{DS} (ON) | Drain-source on-state voltage | I _D = 3A, V _{GS} = 10V | — | 4.20 | 5.46 | V |
| y _{fs} | Forward transfer admittance | I _D = 3A, V _{DS} = 10V | 3.6 | 6.0 | — | S |
| C _{iss} | Input capacitance | V _{DS} = 25V, V _{GS} = 0V, f = 1MHz | — | 1050 | — | pF |
| C _{oss} | Output capacitance | | — | 100 | — | pF |
| C _{rss} | Reverse transfer capacitance | | — | 24 | — | pF |
| t _d (on) | Turn-on delay time | | — | 20 | — | ns |
| t _r | Rise time | V _{DD} = 200V, I _D = 3A, V _{GS} = 10V, R _{GEN} = R _{GS} = 50Ω | — | 22 | — | ns |
| t _d (off) | Turn-off delay time | | — | 110 | — | ns |
| t _f | Fall time | | — | 35 | — | ns |
| V _{SD} | Source-drain voltage | I _S = 3A, V _{GS} = 0V | — | 1.0 | 1.5 | V |
| R _{th} (ch-c) | Thermal resistance | Channel to case | — | — | 1.0 | °C/W |


PERFORMANCE CURVES

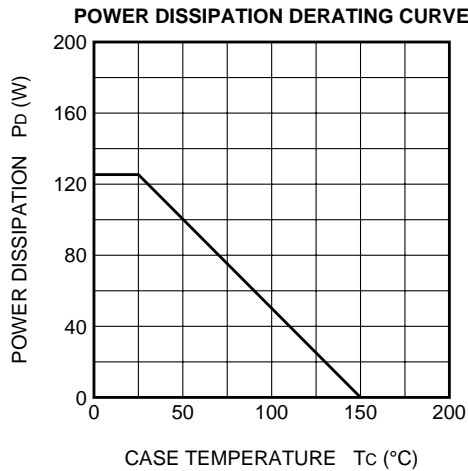


FS7SM-14A

HIGH-SPEED SWITCHING USE


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

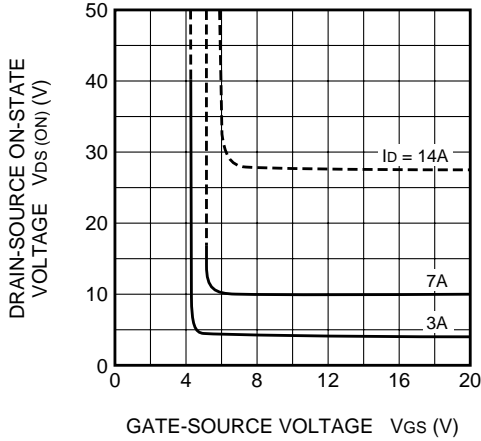


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

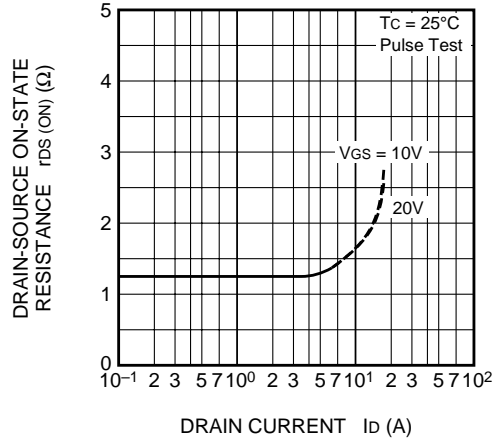


TRANSFER CHARACTERISTICS (TYPICAL)

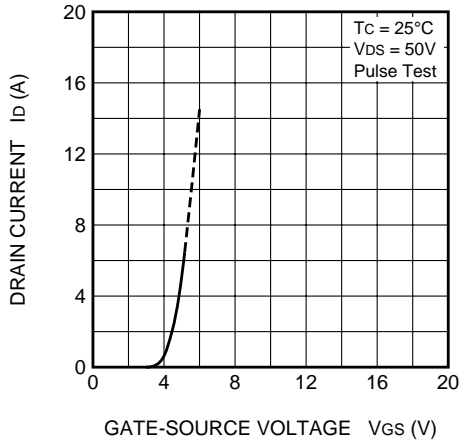


FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

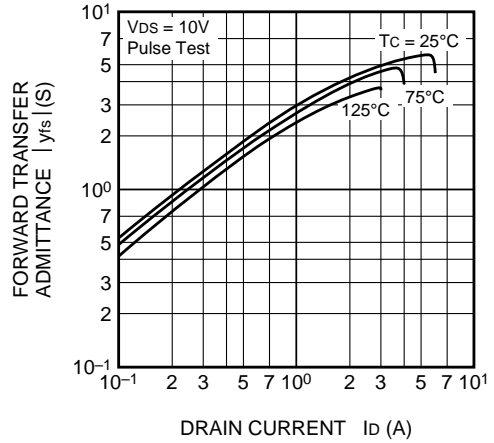


CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

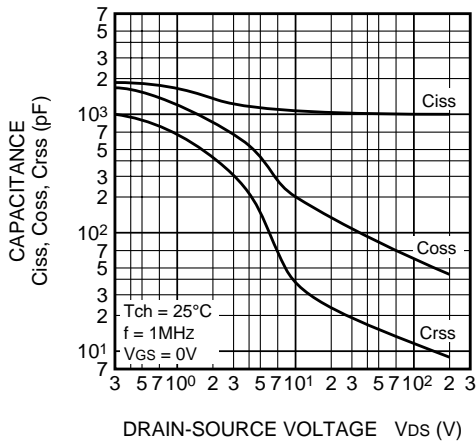


SWITCHING CHARACTERISTICS (TYPICAL)

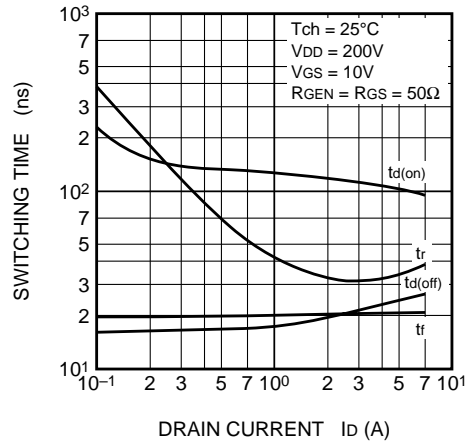


GATE-SOURCE VOLTAGE VS. GATE CHARGE (TYPICAL)

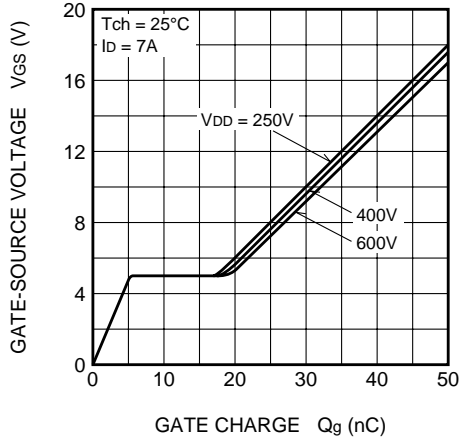


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

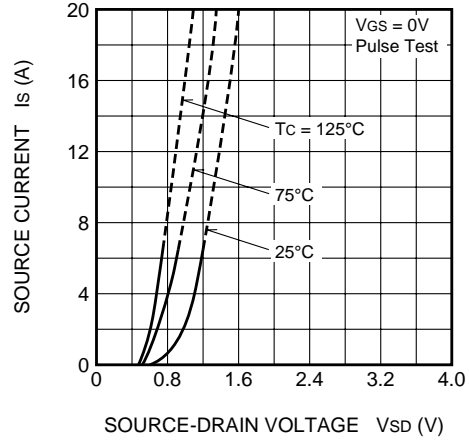


ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

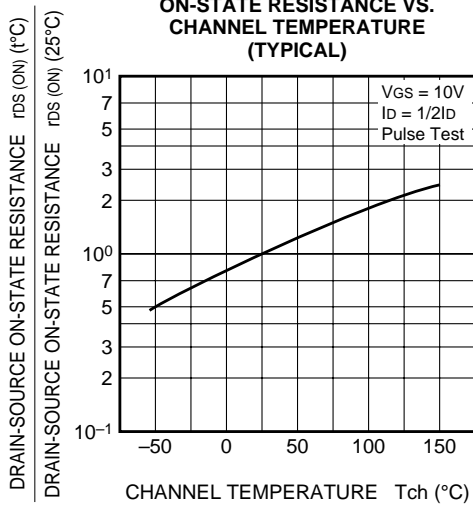

THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

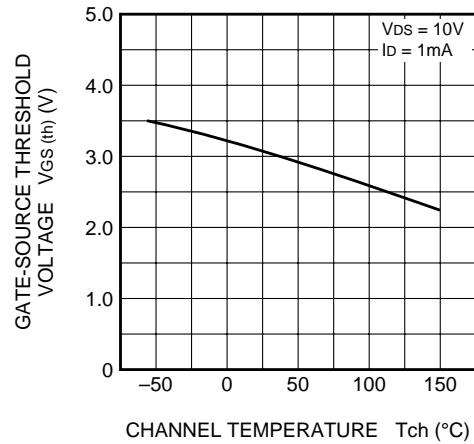

BREAKDOWN VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

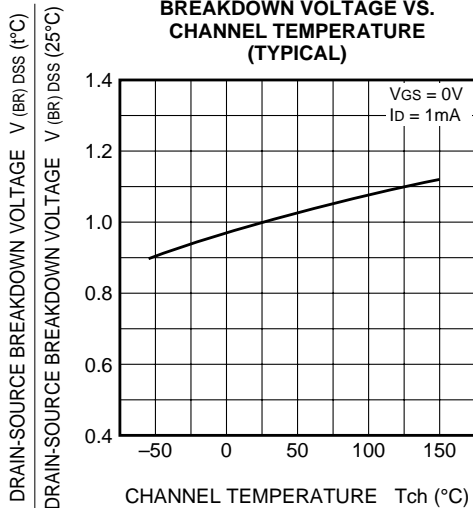

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

