



# SUPER BRIGHT T-1 (3mm) LED LAMP - Water Clear


AllnGaP Red

MV7042

MV7043

MV7044

## PACKAGE DIMENSIONS

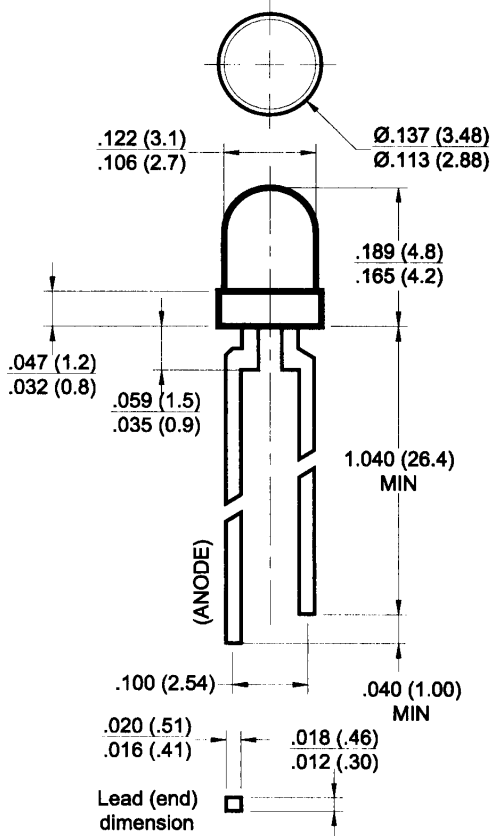

- Note: 1) All dimensions are in inches (mm).  
 2) Lead spacing is measured where the leads emerge from the package.  
 3) Protruded resin under the flange is 1.5mm (0.059") max.

## DESCRIPTION

These T-1 LEDs have a wide viewing angle of 60° and are encapsulated in an epoxy package with a water clear lens. They are constructed with AllnGaP LEDs and emit a peak wavelength of 645 nm.

## FEATURES

- Popular T-1 package.
- Low drive current.
- Solid State reliability.
- Super high brightness suitable for outdoor applications.
- Water clear optics.
- Standard 100 mil. Lead spacing.

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise specified)

DC forward current (I <sub>F</sub> ) .....	30 mA
Peak forward current (I <sub>F</sub> ) @ f = 1.0 KHz, Duty factor = 1/10 .....	160 mA
Power dissipation (P <sub>d</sub> ) .....	85 mW
Reversed voltage (V <sub>R</sub> ) I <sub>R</sub> = 10 µA .....	5 V
Operating temperature range .....	-40°C to +100°C
Storage temperature range .....	-40°C to +100°C
Lead soldering time .....	5 secs @ 260°C



# SUPER BRIGHT T-1 (3mm) LED LAMP - Water Clear

## ELECTRO-OPTICAL CHARACTERISTICS (T<sub>A</sub>=25°C unless otherwise specified)

Part Number:	<u>MV7042</u>	<u>MV7043</u>	<u>MV7044</u>	Test Condition
Luminous intensity (mcd)				I <sub>F</sub> = 20 mA
Minimum	100	160	250	
Typical	150	240	375	
Forward voltage (V <sub>F</sub> )				I <sub>F</sub> = 20 mA
Typical	2.1	2.1	2.1	
Maximum	2.8	2.8	2.8	
Peak Wavelength	645	645	645	I <sub>F</sub> = 20 mA
Spectral line half width (nm)	20	20	20	I <sub>F</sub> = 20 mA
Viewing angle	60	60	60	I <sub>F</sub> = 20 mA

## TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES (T<sub>A</sub> = 25°C)

