


# SUPER BRIGHT T-1 3/4 (5 mm) LED LAMP - Water Clear

## PACKAGE DIMENSIONS

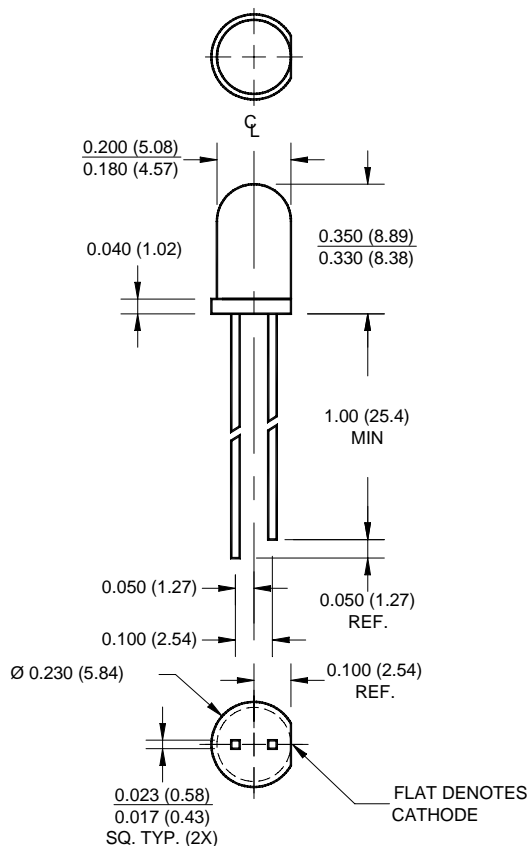

### NOTES:


1. Dimensions for all drawings are in inches (mm).
2. Lead spacing is measured where the leads emerge from the package.
3. Protruded resin under the flange is 1.5 mm (0.059") max.

**SUPER YELLOW**  
**MV8331 MV8332**  
**MV8333**

**MV833X**

## FEATURES

- Popular T-1 3/4 package
- Super high brightness suitable for outdoor applications
- Solid state reliability
- Water clear optics
- Standard 100 mil. lead spacing



## DESCRIPTION

This T-1 3/4 super bright LED has a moderate viewing angle of 30° for concentrated light output. The MV830X series is made with an AlInGaP LED that emits yellow light at 590 nm. It is encapsulated in a water clear epoxy lens package.

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise specified)


Parameter	Symbol	Rating	Unit
Operating Temperature	T <sub>OPR</sub>	-40 to +100	°C
Storage Temperature	T <sub>STG</sub>	-40 to +100	°C
Lead Soldering Time	T <sub>SOL</sub>	260 for 5 sec	°C
Continuous Forward Current	I <sub>F</sub>	30	mA
Peak Forward Current (f = 1.0 KHz, Duty Factor = 1/10)	I <sub>F</sub>	160	mA
Reverse Voltage	V <sub>R</sub>	5	V
Power Dissipation	P <sub>D</sub>	85	mW

# SUPER BRIGHT T-1 3/4 (5 mm) LED LAMP - Water Clear


**SUPER YELLOW**                      **MV833X**  
**MV8331 MV8332**  
**MV8333**

<b>ELECTRICAL / OPTICAL CHARACTERISTICS</b> (T <sub>A</sub> =25°C)				
Part Number	MV8331	MV8332	MV8333	Condition
Luminous Intensity (mcd)				I <sub>F</sub> = 20mA
Minimum	400	630	1000	
Typical	630	940	1500	
Forward Voltage (V)				I <sub>F</sub> = 20mA
Maximum	2.8	2.8	2.8	
Typical	2.1	2.1	2.1	
Peak Wavelength (nm)	590	590	590	I <sub>F</sub> = 20mA
Spectral Line Half Width (nm)	15	15	15	I <sub>F</sub> = 20mA
Viewing Angle (°)	30	30	30	I <sub>F</sub> = 20mA

## TYPICAL PERFORMANCE CURVES

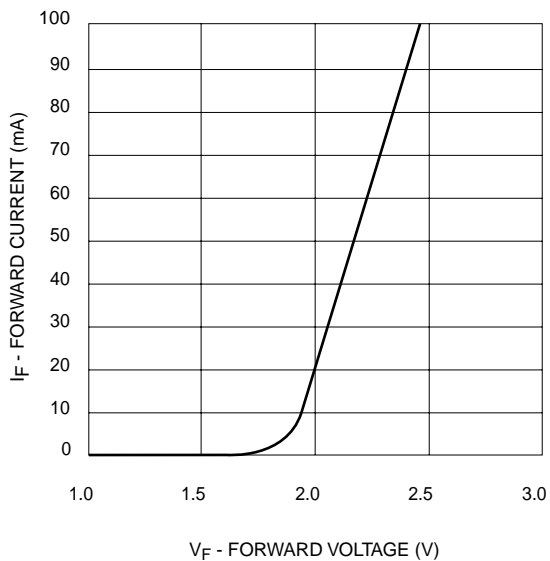

**Fig. 1 Forward Current vs. Forward Voltage**

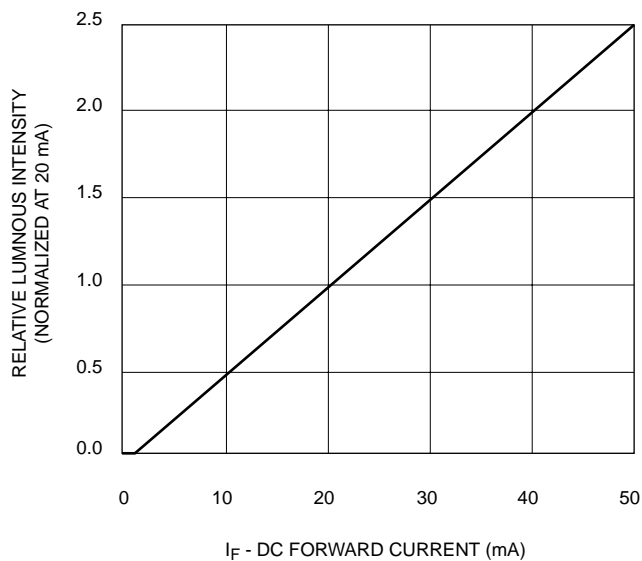


**Fig. 2 Relative Luminous Intensity vs. DC Forward Current**


# SUPER BRIGHT T-1 3/4 (5 mm)

## LED LAMP - Water Clear

**SUPER YELLOW** **MV833X**  
**MV8331 MV8332**  
**MV8333**

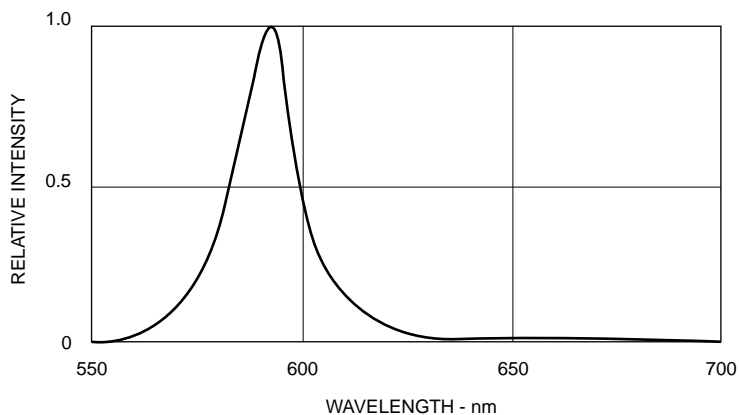


**Fig. 3 Relative Intensity vs. Peak Wavelength**

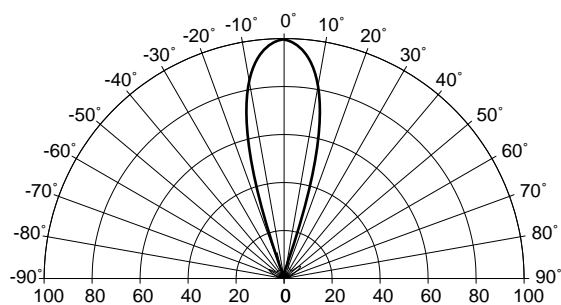

REL. LUMINOUS INTENSITY (%)

**Fig. 4 Radiation Diagram**

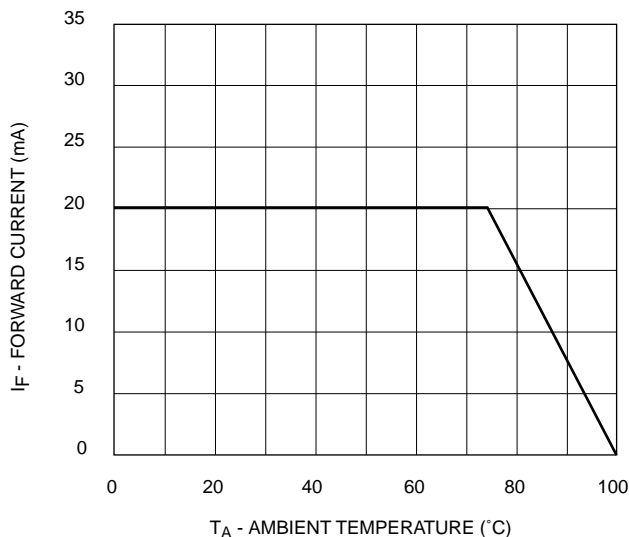

**Fig. 5 Current Derating Curve**