

SANYO	No.3188	2SA1740/2SC4548
		PNP Epitaxial Planar Silicon Transistor NPN Triple Diffused Planar Silicon Transistor High-Voltage Driver Applications

Features

- High breakdown voltage
- Adoption of MBIT process
- Excellent h_{FE} linearity

() : 2SA1740

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

			unit
Collector to Base Voltage	V_{CBO}	(-)400	V
Collector to Emitter Voltage	V_{CEO}	(-)400	V
Emitter to Base Voltage	V_{EBO}	(-)5	V
Collector Current	I_C	(-)200	mA
Collector Current(Pulse)	I_{CP}	(-)400	mA
Collector Dissipation	P_C	Mounted on ceramic board (250mm ² × 0.8mm)	1.3 W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55 to +150	°C

Electrical Characteristics at $T_a = 25^\circ\text{C}$

			min	typ	max	unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = (-)300\text{V}, I_E = 0$			(-)0.1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = (-)4\text{V}, I_C = 0$			(-)0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = (-)10\text{V}, I_C = (-)50\text{mA}$	60*		200*	
Gain-Bandwidth Product	f_T	$V_{CE} = (-)30\text{V}, I_C = (-)10\text{mA}$		70		MHz
Output Capacitance	c_{ob}	$V_{CB} = (-)30\text{V}, f = 1\text{MHz}$		(5)4		pF
Reverse Transfer Capacitance	c_{re}	$V_{CB} = (-)30\text{V}, f = 1\text{MHz}$		(4)3		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C = (-)50\text{mA}, I_B = (-)5\text{mA}$			(-)0.8	0.6 V
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C = (-)50\text{mA}, I_B = (-)5\text{mA}$			(-)1.0	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C = (-)10\mu\text{A}, I_E = 0$	(-)400			V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C = (-)1\text{mA}, R_{BE} = \infty$	(-)400			V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E = (-)10\mu\text{A}, I_C = 0$	(-)5			V
Turn-ON Time	t_{on}	See specified Test Circuit.		0.25		μs
Turn-OFF Time	t_{off}	"/		5.0		μs


*: The 2SA1740/2SC4548 are classified by 50mA h_{FE} as follows:

60 D 120	100 E 200
----------	-----------

Marking 2SA1740 : AK
2SC4548 : CN

h_{FE} rank : D,E


Switching Time Test Circuit



$10I_{B1} = -10I_{B2} = I_C = 50\text{mA}$
 $R_L = 3\text{k}\Omega, R_B = 200\Omega$ at $I_C = 50\text{mA}$
 For PNP, the polarity is reversed.

Unit (Resistance : Ω , Capacitance : F)

Package Dimensions 2038
(unit : mm)








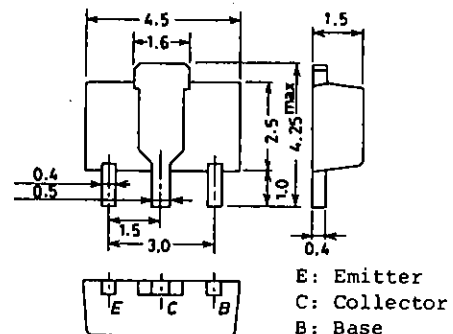


E: Emitter
C: Collector
B: Base





SANYO: PCP
(Bottom View)

SANYO Electric Co., Ltd. Semiconductor Business Headquarters
 TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taiko-ku, TOKYO, 110 JAPAN

2SA1740/2SC4548

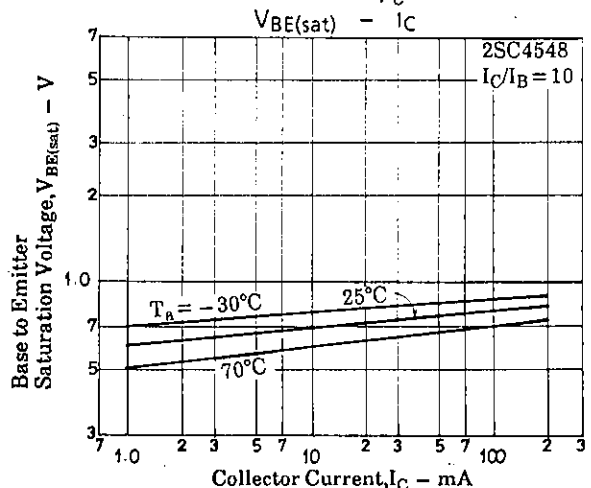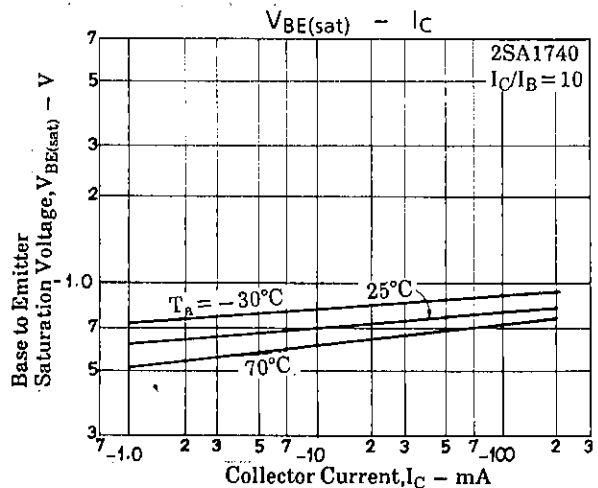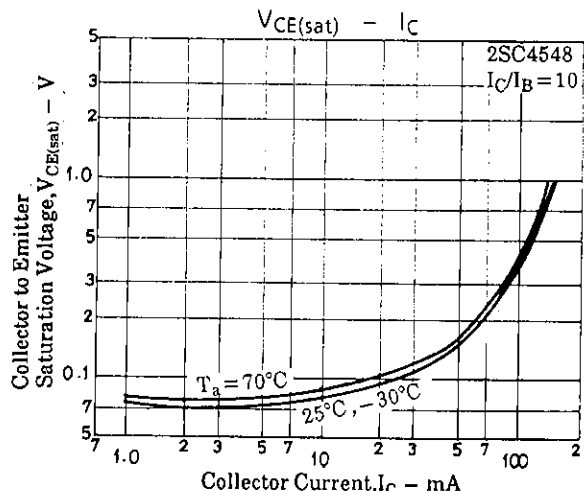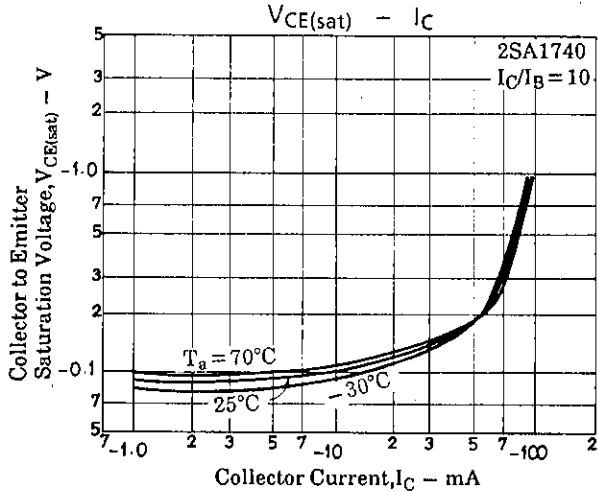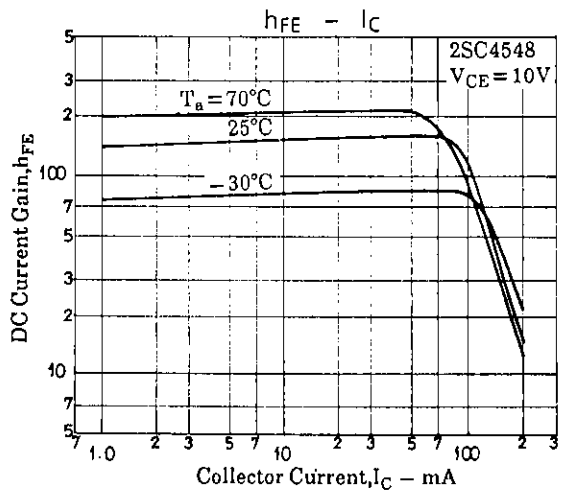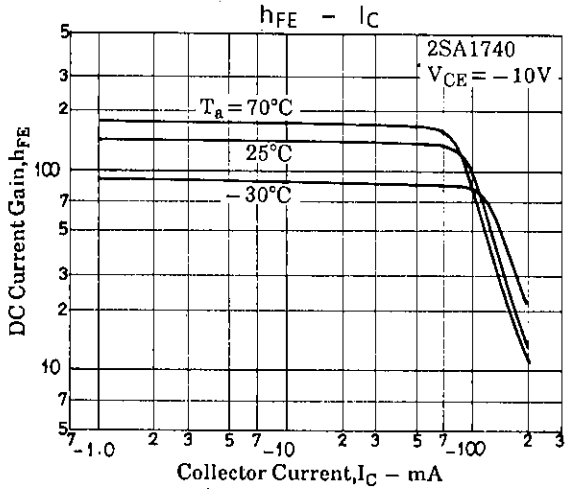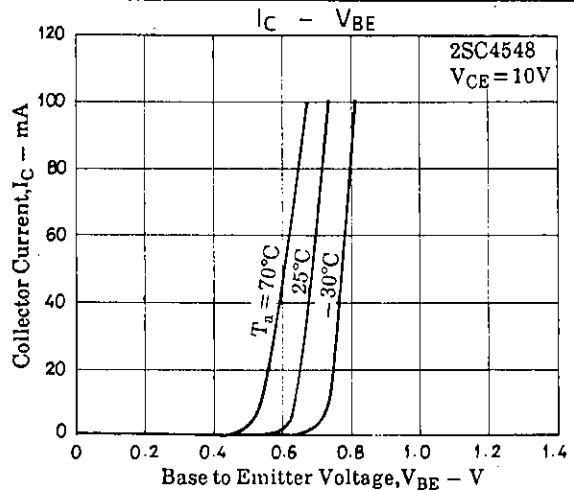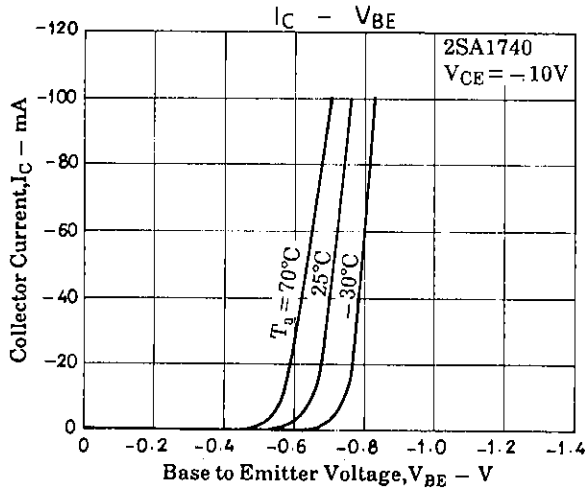

2SA1740/2SC4548

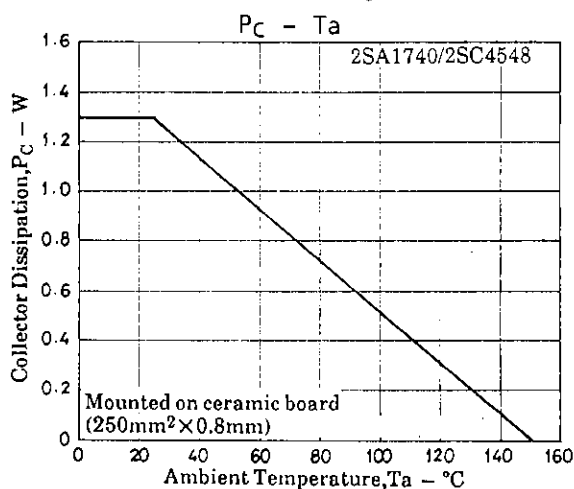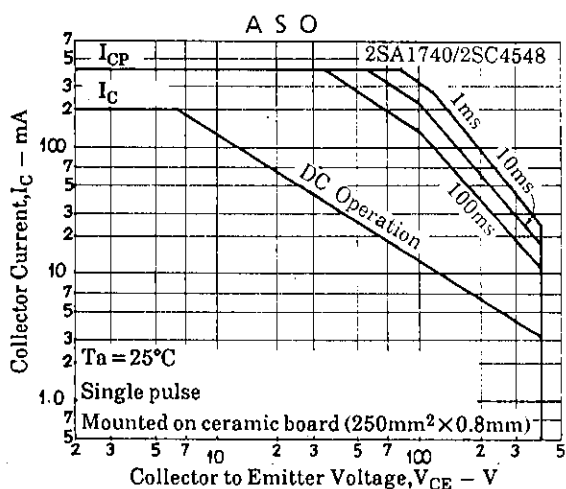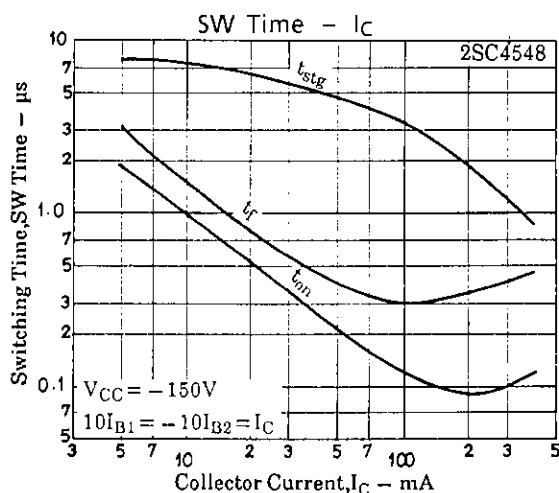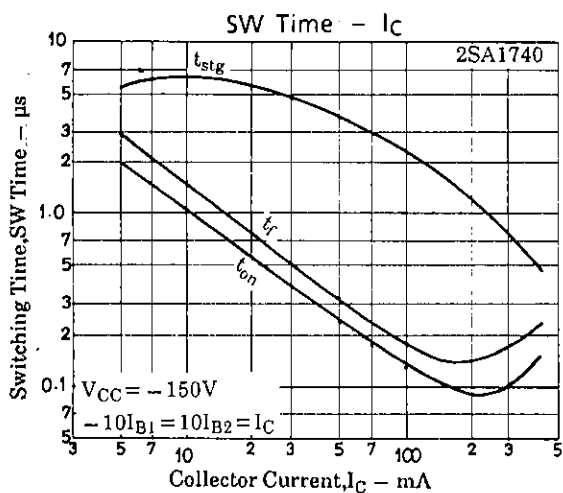

■ No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.

■ Anyone purchasing any products described or contained herein for an above-mentioned use shall:

- ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
- ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.

■ Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.