

SANYO

No.3607A

LA4620

Two-channel Audio Power Amplifier

OVERVIEW

The LA4620 is a two-channel high-power audio amplifier for automotive stereo and general-purpose audio amplification equipment.

The LA4620 has a 6 to 22 V operating supply voltage range. Each channel uses a bridge configuration to obtain high output power from low supply voltages. Typical output power is 17 W per channel.


The LA4620 incorporates a thermal protection circuit, an output short-circuit protection circuit and a pop suppression circuit. It has low-power, logic-level standby control and mute control inputs.

The LA4620 is available in 23-pin SIPs and operates from a 15 V supply.

FEATURES

- 17 W output power per channel
- 6 to 22 V supply voltage range
- Pop suppression
- Logic-controlled standby mode
- Thermal protection
- Short-circuit protection
- 60 dB channel separation
- 58 dB supply voltage ripple rejection
- 0.2% harmonic distortion
- 23-pin SIP


PINOUT

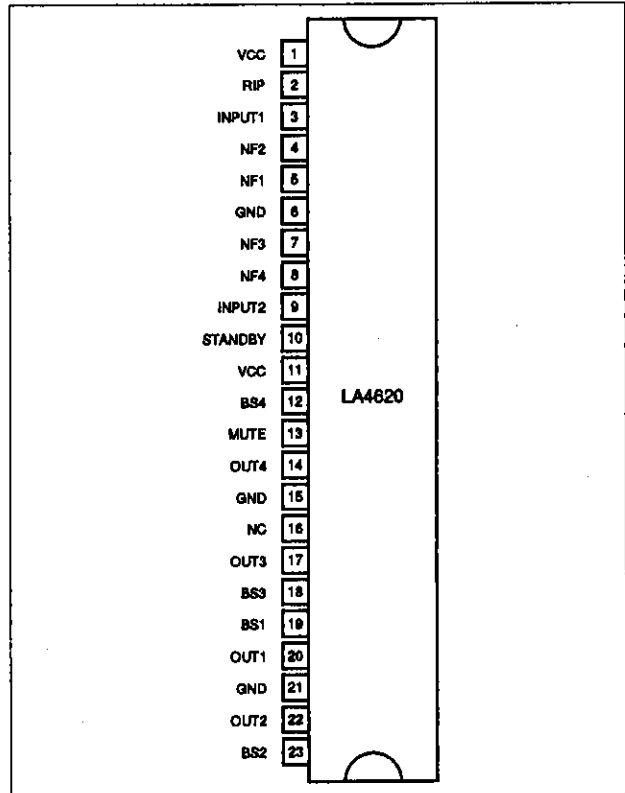


PACKAGE DIMENSIONS

Unit: mm

SIP23HZ-3160

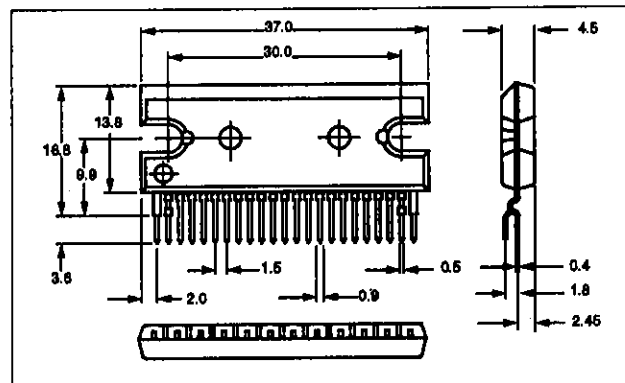

BLOCK DIAGRAM

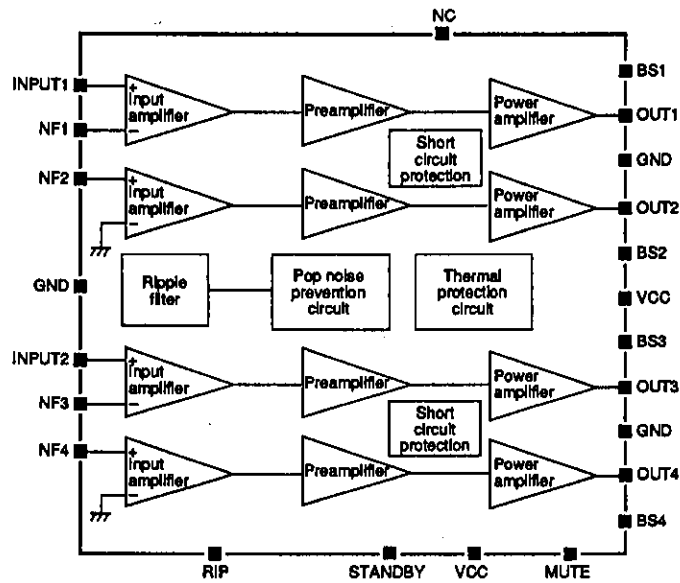

PIN DESCRIPTION

Number	Name	Description
1	VCC	Supply voltage
2	RIP	Ripple filter
3	INPUT1	Channel 1 input
4	NF2	Channel 1 negative feedback input
5	NF1	Channel 1 negative feedback input
6	GND	Ground
7	NF3	Channel 2 negative feedback input
8	NF4	Channel 2 negative feedback input
9	INPUT2	Channel 2 input
10	STANDBY	Standby switch
11	VCC	Supply voltage
12	BS4	Channel 2 bootstrap capacitor
13	MUTE	Muting control
14	OUT4	Channel 2 output
15	GND	Ground
16	NC	No connection
17	OUT3	Channel 2 output
18	BS3	Channel 2 bootstrap capacitor
19	BS1	Channel 1 bootstrap capacitor
20	OUT1	Channel 1 output
21	GND	Ground
22	OUT2	Channel 1 output
23	BS2	Channel 1 bootstrap capacitor

SPECIFICATIONS

Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC} max	24	V
Power dissipation	P_d max	37.5	W
Operating temperature range	T_{opr}	-20 to 75	deg. C
Storage temperature range	T_{stg}	-40 to 150	deg. C

Recommended Operating Conditions

$T_a = 25$ deg. C

Parameter	Symbol	Rating	Unit
Supply voltage	V_{CC}	12, 15	V
Supply voltage range	V_{CC}	6 to 22	V
Load resistance	R_L	4	Ω

Note

When operating at 22 V with a load of 4 Ω , ensure that the output power, P_o , does not exceed 1 W per channel.


Electrical Characteristics

$V_{CC} = 15$ V, $T_a = 25$ deg. C, $f_{IN} = 1$ kHz, $R_L = 4$ Ω , $R_g = 600$ Ω unless otherwise noted


Parameter	Symbol	Condition	Rating			Unit
			Min	Typ	Max	
Quiescent current	I_{CCO}		50	75	120	mA
Standby current	I_{ST}		-	1	10	μ A
Output power	P_{O1}	$V_{CC} = 12$ V, THD = 10%	10	13	-	W
	P_{O2}	$V_{CC} = 15$ V, THD = 10%	14	17	-	W
Total harmonic distortion	THD	$P_o = 1$ W	-	0.2	1.0	%
Input resistance	R_{IN}		17	24	31	k Ω
Voltage gain	VG		42	44	46	dB
Output noise voltage	V_{NO1}	$R_g = 0$ Ω , bandpass frequency range = 20 Hz to 20 kHz	-	0.2	0.5	mV
	V_{NO2}	$R_g = 10$ k Ω , bandpass frequency range = 20 Hz to 20 kHz	-	0.5	1.0	mV
Channel separation	SEP	$R_g = 10$ k Ω , $V_o = 0$ dBm	45	60	-	dB
Supply voltage ripple rejection	SVRR	$R_g = 0$ Ω , $f_R = 100$ Hz, $V_{CCR} = 0$ dBm	45	58	-	dB
Offset voltage	V_{OS}	$R_g = 0$ Ω	-180	-	180	mV

Typical Performance Characteristics


Output power vs. supply voltage

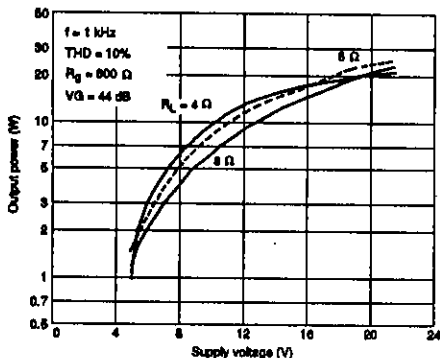


Channel separation vs. frequency

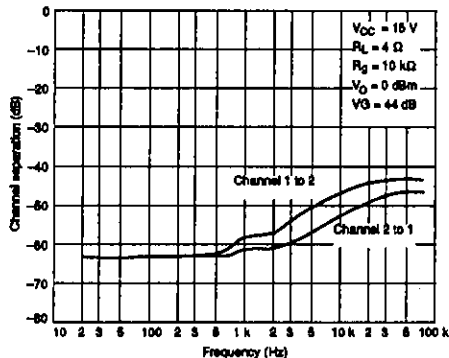


THD vs. output power (1)

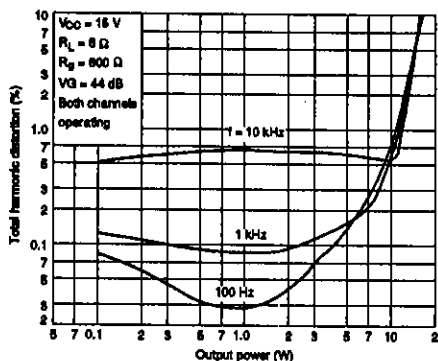


Supply voltage ripple rejection vs. ripple voltage

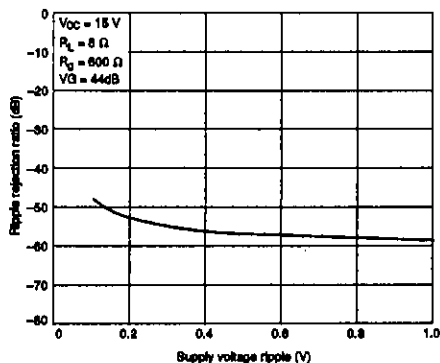


THD vs. output power (2)

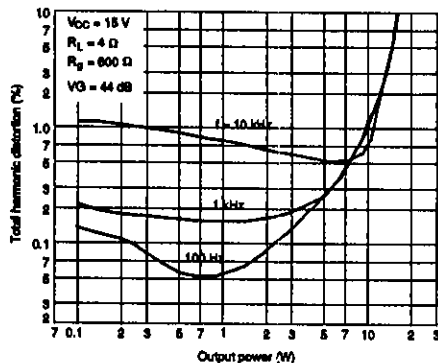


Supply voltage ripple rejection vs. supply voltage

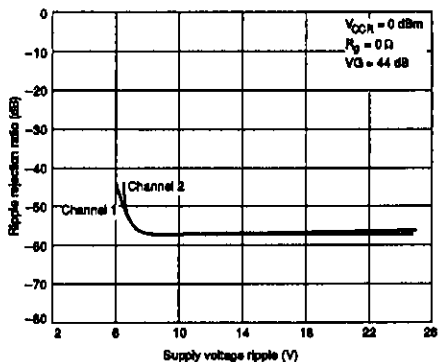


Frequency response

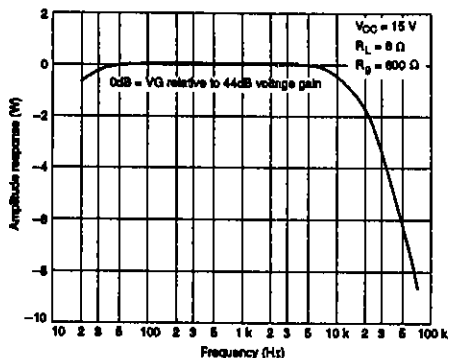


Quiescent and standby current vs. supply voltage

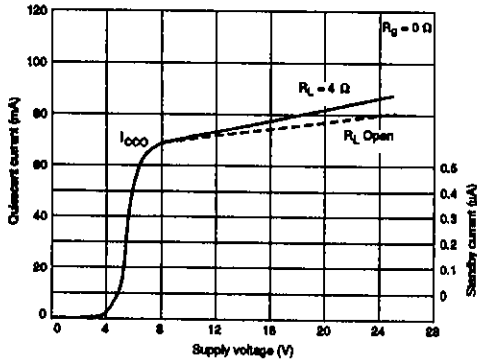


Noise voltage vs. source impedance

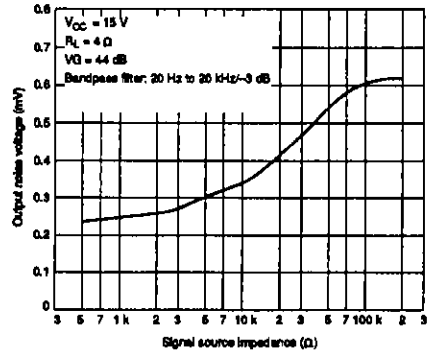


Power dissipation vs. output power

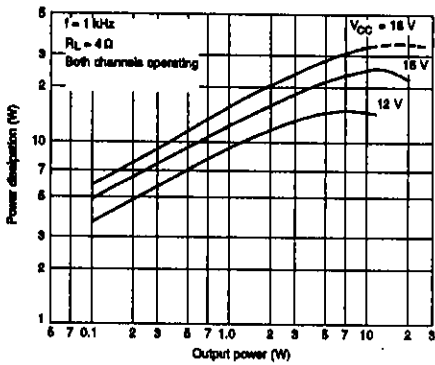


Noise voltage vs. supply voltage

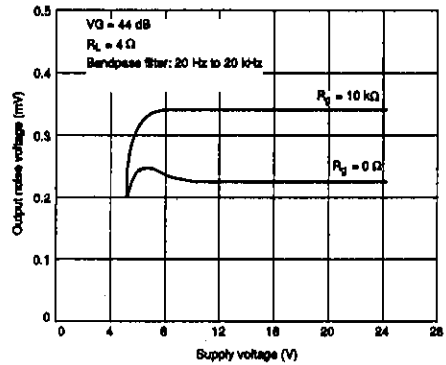


Supply current vs. output power

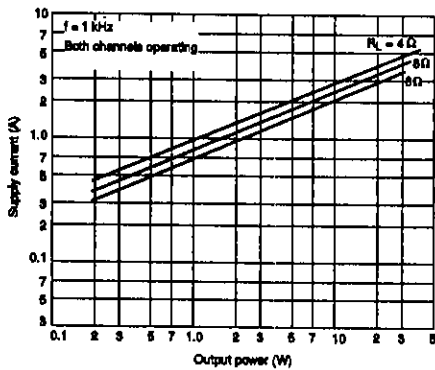


Total harmonic distortion vs. supply voltage

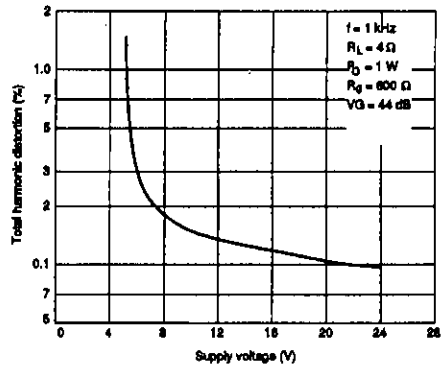


Maximum power dissipation vs. supply voltage

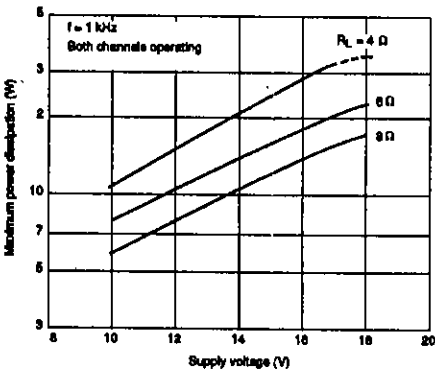


Quiescent current vs. ambient temperature

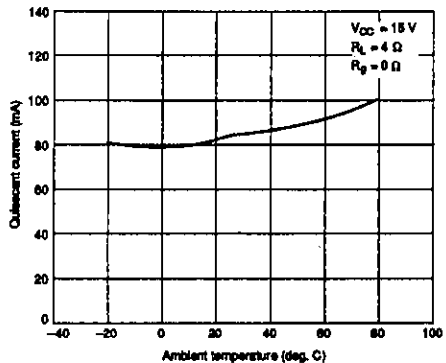


Output power vs. ambient temperature

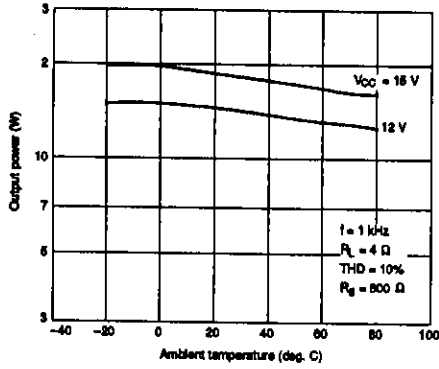


Maximum power dissipation vs. ambient temperature

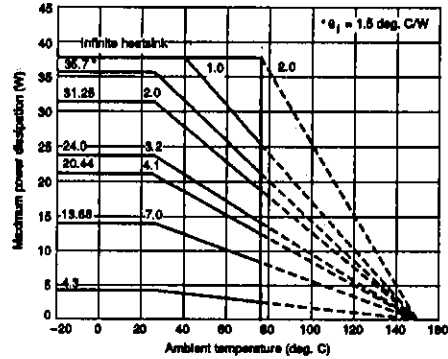


Startup time vs. C9

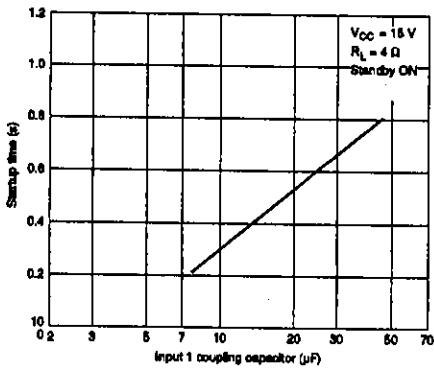

Maximum heatsink thermal resistance vs. surface area

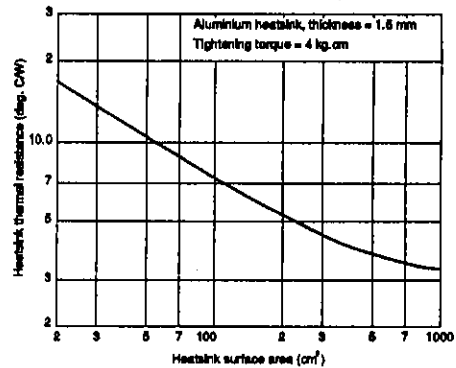

Standby switching characteristic

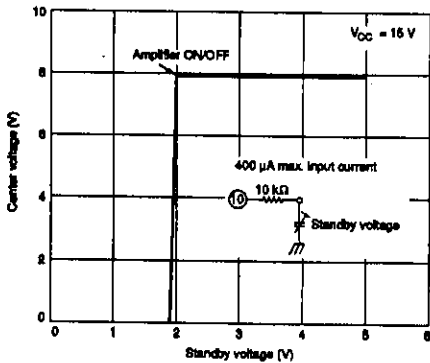

FUNCTIONAL DESCRIPTION

Standby Mode Control

Applying 1.5 V or more to R3 at STANDBY SW enables the amplifier. The maximum input current is 400 μ A.


Mute Control

Pulling MUTE to ground mutes the amplifier. The startup time and recovery time when MUTE is pulled HIGH can be adjusted by changing C9.

Short-circuit Protection

The LA4620 incorporates a protection circuit for short circuits between output pins. However, this is inadequate for short circuits to ground or the supply. See the design notes.

PRINTED CIRCUIT BOARD LAYOUT

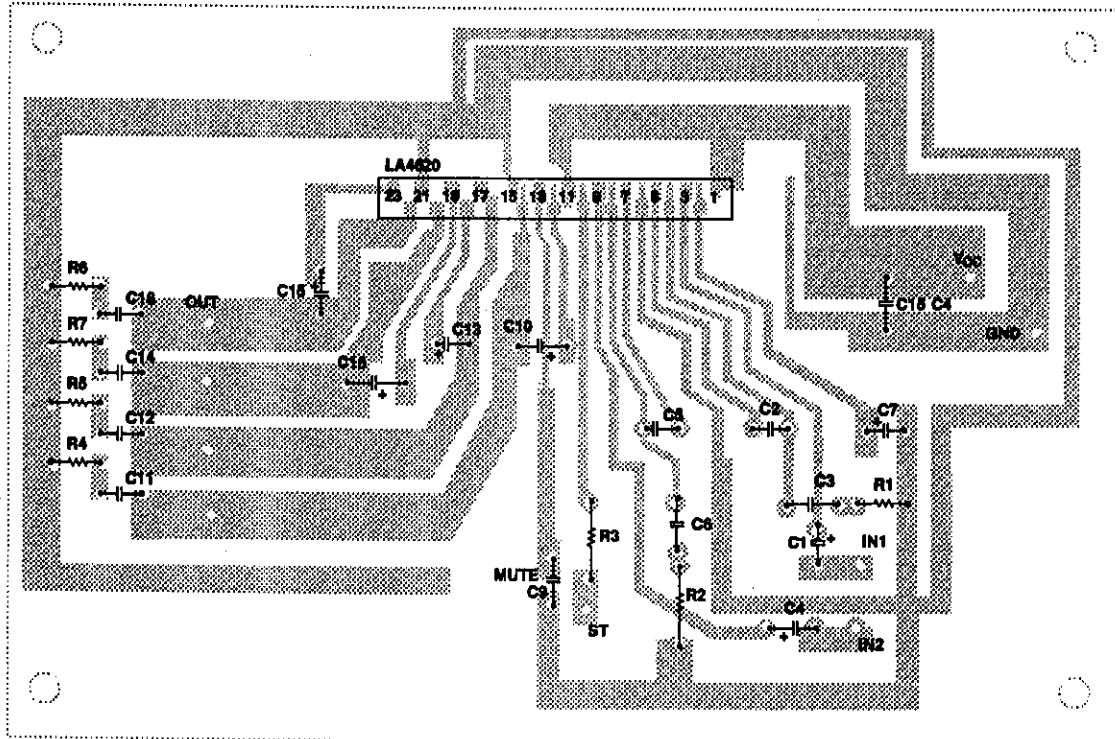

Note

Board size: 125 × 85 mm
 Surface finish: Copper foil

TYPICAL APPLICATION

