



SGD-100T

GaAs Schottky Barrier Diode

C to X Band, Mixer, Modulator Applications


Features

- Very small-sized ceramic package.
- Less parasitic components, conversion loss.

Package Dimensions

unit:mm

1235A

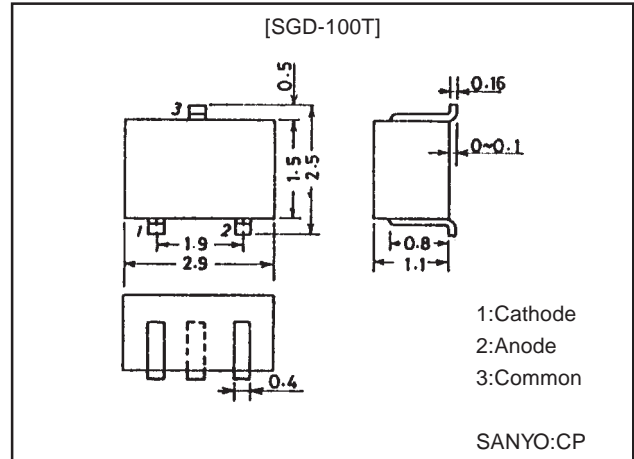

Specifications


Absolute Maximum Ratings at Ta = 25°C (Per element)

Parameter	Symbol	Conditions	Ratings	Unit
Peak Reverse Voltage	V_{RM}		4.5	V
Reverse Voltage	V_R		4	V
Peak Forward Current	I_{FM}		150	mA
Average Rectified Current	I_O		50	mA
Junction Temperature	T_j		150	°C
Storage Temperature	T_{stg}		-55 to +150	°C
Mounting Temperature	T_m	10ns	230	°C

Electrical Characteristics at Ta = 25°C (Per element)

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Forward Voltage	V_F	$I_F=20mA$		0.8	0.9	V
Reverse Voltage	V_R	$I_R=10\mu A$	4.0	6.0		V
Interterminal Capacitance	C_t	$V=0V, f=1MHz$		0.3	0.4	pF
Series Resistance	R_S	$I_F=20mA$		1.5	3.0	Ω

Electrical Connection



- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 1998. Specifications and information herein are subject to change without notice.