

## HID & SYSTEM MANAGEMENT PRODUCTS, PROTOCOL INTERPRETER FAMILY

### DESCRIPTION

The GeniPS2™ UR3HCGNP-001 is a single IC that converts PS/2 keyboard and mouse data to USB.

The GeniPS2™ is ideal for system legacy support, enabling seamless connection of standard PS/2 devices (mice or keyboards) to USB.

The IC offers two hot-pluggable and hot-swappable PS/2 ports; either port can accept a mouse or a keyboard. In addition, the GeniPS2™ auto-detects and transparently supports mice with MouseWheel functionality. Internal and external mouse and keyboard data are streamed and appear to the system as if coming from a single source.

The GeniPS2™ supports remote wake-up function via either mouse or keyboard, if the BIOS of the host machine is configured in this manner.

In addition, the GeniPS2™ supports a multitude of languages, including Korean and Japanese.


### FEATURES

- Interfaces PS/2 devices to USB
- Devices are hot-pluggable
- Provides two PS/2 ports
- PS/2 ports support MouseWheel functionality
- PS/2 ports are auto-selectable and hot-swappable – the mouse or keyboard can be used in either port
- Works with standard Windows 98 keyboard and mouse drivers
- Easy to implement
- Few external components required

### APPLICATIONS

- System Legacy Support


### PIN ASSIGNMENTS

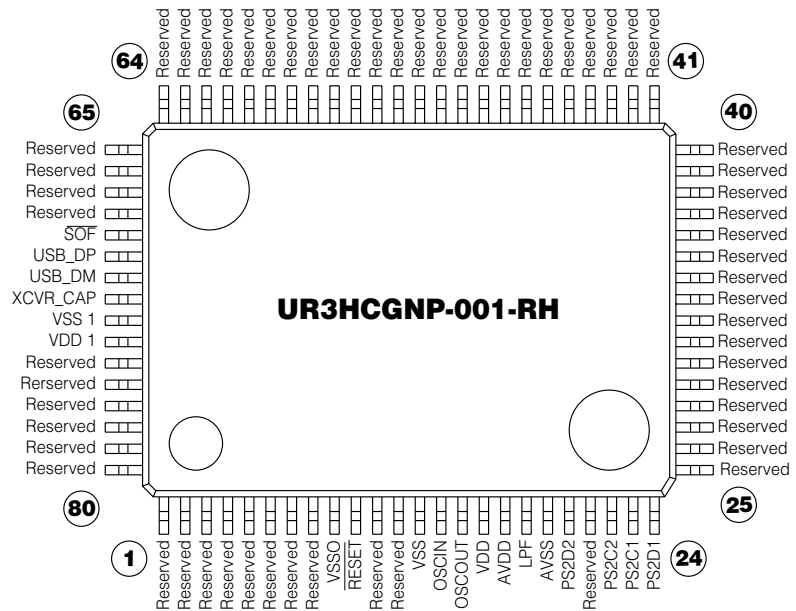

Geni and GeniPS2 are trademarks of Semtech Corporation. All other trademarks belong to their respective companies.

**ORDERING CODE**

<b>Package options</b> 80-pin, PQFP	<b>Pitch in mm's</b> 0.8	<b>TA = -20°C to +85°C</b> UR3HCGNP-001-RH
<b>Other Materials</b> GeniPS2™ Eval Kit	<b>Type</b> Evaluation Kit	<b>Order number</b> EVK3-GNP-001-XXX

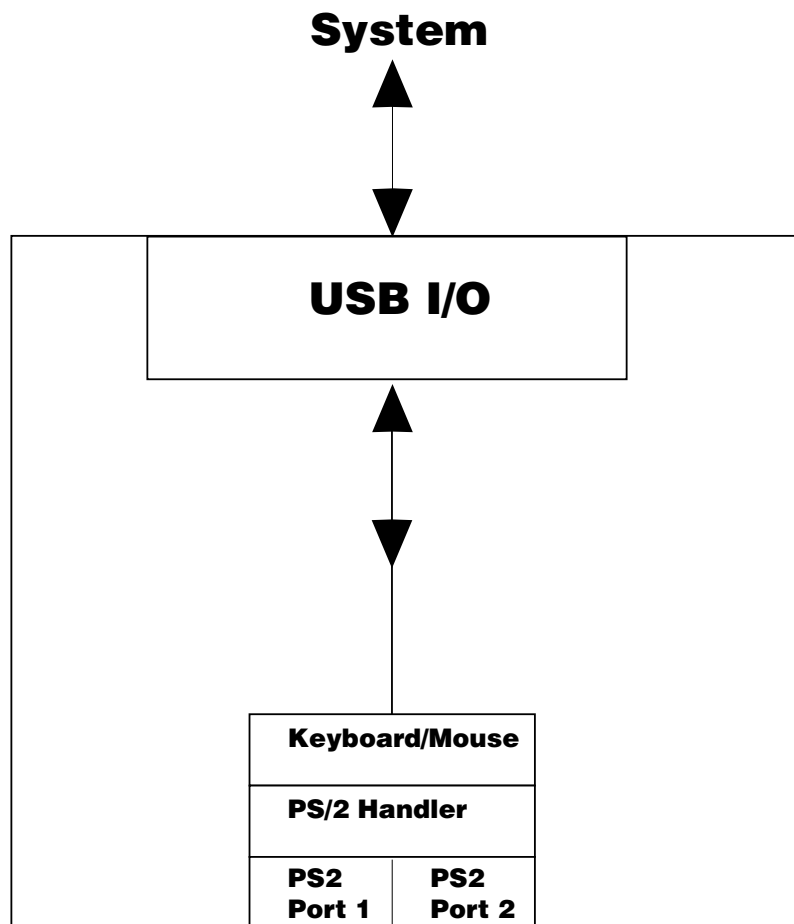**BLOCK DIAGRAM**




## USB FUNCTIONALITY

The GeniPS2™ is a full-speed composite USB device that interfaces PS/2.

The PS/2 interface supports legacy Human Input Devices (HID)-class specification and uses two interrupt endpoints for the PS/2 devices.

The GeniPS2™ handles the merging of all this data, and sends the data to the system. Data can come from either of the two PS/2 ports. Internal and external mouse and keyboard data are streamed and appear to the system as if coming from a single source.

## PIN DEFINITIONS

Mnemonic	QFP	Type	Name and Function
<b>Power Supply</b>			
VDD	16	PWR	<b>Positive supply voltage</b>
VDD1	74	PWR	<b>Positive supply voltage</b>
AVDD	17	PWR	<b>Positive analog</b> reference voltage
AVSS	19	PWR	<b>Ground:</b> analog signal
VSS	13	PWR	<b>Ground:</b> negative supply voltage
VSS0	9	PWR	<b>Ground:</b> negative supply voltage
VSS1	73	PWR	<b>Ground:</b> negative supply voltage
XCVRCAP	72	PWR	Bypass line
<b>Reset</b>			
_RESET	10	I	<b>Controller hardware reset pin:</b> Active-low reset line
<b>Oscillator pins</b>			
OSCIN	14	I	<b>Oscillator input:</b> input signal from oscillator
OSCOU	15	O	<b>Oscillator output:</b> output signal to oscillator
LPF	18	O	<b>Loop filter</b> for frequency synthesizer
<b>USB</b>			
_SOF	69	O	<b>USB _SOF signal</b>
USB_DP	70	I/O	<b>USB D+ line</b>
USB-DM	71	I/O	<b>USB D- line</b>
<b>PS/2</b>			
PS2D2	20	I/O	<b>Data line</b> for PS/2 port 2
PS2C2	22	I/O	<b>Clock line</b> for PS/2 port 2
PS2C1	23	I/O	<b>Clock line</b> for PS/2 port 1
PS2D1	24	I/O	<b>Data line</b> for PS/2 port 1
<b>Reserved</b>			
Reserved	1-8 25-40 41-69 75-80	N/U	<b>Not used;</b> keep open; reserved for future functions



## PS/2 PORTS

The two PS/2 ports allow the user to connect legacy PS/2 devices to the USB host system. Standard 104-key keyboards and PS/2 mice, with support for MouseWheel functionality, can be hot-plugged at either of the PS/2 ports and immediately begin communicating with the host.

## USB DESCRIPTORS

Offset	Field	Size	Value	Description
<b>Device Descriptor</b>				
0	bLength	1	12	Descriptor length (18 bytes)
1	bDescriptorType	1	01	Descriptor type
2	bcdUSB	2	0101	USB release
4	bDeviceClass	1	00	Specified in interfaces
5	bDeviceSubClass	1	00	Specified in interfaces
6	bDeviceProtocol	1	00	No protocols on the device basis
7	bMaxPacketSize0	1	08	Maximum packet length (bytes) for endpoint 0 is 8
8	idVendor	2	047A	Vendor ID (USAR)
10	idProduct	2	0101	Product ID
12	bcdDevice	2	0100	Firmware revision 1.0
14	iManufacturer	1	04	Index for manufacturer string descriptor
15	iProduct	1	1E	Index for product string descriptor
16	iSerialNumber	1	00	Index for serial number string descriptor
17	bNumConfigurations	1	01	Number of configurations
<b>Configuration Descriptor</b>				
0	bLength	1	09	Configuration Descriptor length
1	bDescriptorType	1	02	Configuration Descriptor
2	bTotalLength	2	003B	Total length of descriptors returned with this one
4	bNumInterfaces	1	02	Number of interfaces supported
5	bConfigurationValue	1	01	Value associated with this configuration
6	iConfiguration	1	00	Index for configuration string descriptor – none
7	bmAttributes	1	A0	Configuration Characteristics Bit 7: Reserved (set to one) 1 Bit 6: Self-powered 0 Bit 5: Remote wake-up 1
8	MaxPower	1	32	Maximum Power consumed is 100 mA
<b>String Descriptor</b>				
0	bLength	1	04	Length of language ID
1	bDescriptorType	1	03	Descriptor type (=String)
2	bString	2	0904	Array of Language ID code (=English)
4	bLength	1	1A	Length of Manufacture String
5	bDescriptionType	1	03	Descriptor Type (=String)
6	bString	24		Manufacturer name
30	bLength	1	2A	Length of product string
31	bDescriptorType	1	03	Descriptor Type (= String)
32	bString	40		Geni PS2 Product Name

**USB DESCRIPTORS, (CON'T)**

<b>Offset</b>	<b>Field</b>	<b>Size</b>	<b>Value</b>	<b>Description</b>
<b>HID Interface Descriptor (Keyboard)</b>				
0	bLength	1	09	Interface Descriptor length
1	bDescriptorType	1	04	Interface Descriptor
2	bInterfaceNumber	1	00	Index for HID interface
3	bAlternateSetting	1	00	Alternate Setting index
4	bNumEndpoints	1	01	Number of endpoints in this interface. This includes one interrupt endpoint
5	bInterfaceClass	1	03	USB HID class
6	bInterfaceSubClass	1	01	Keyboard subclass
7	bInterfaceProtocol	1	01	Boot protocol
8	iInterface	1	00	Index for interface string descriptor – none

<b>HID Class Descriptor (Keyboard)</b>				
0	bLength	1	09	HID Descriptor length
1	bDescriptorType	1	21	HID Descriptor
2	bcdHID	2	0101	HID Specification Release (1.01)
4	bCountryCode	1	00	Country Code (not supported)
5	bNumDescriptors	1	01	Number of class descriptors. The one descriptor is the report descriptor
6	bDescriptorType	1	22	Report Descriptor
7	wDescriptorLength	2	0040	Length of Report Descriptor

<b>EndPoint Descriptor (Keyboard)</b>				
0	bLength	1	07	Endpoint Descriptor Length
1	bDescriptor type	1	05	Endpoint Descriptor
2	bEndpointAddress	1	83	Address:Endpoint3.IN
3	bmAttributes	1	03	Endpoint Attributes: interrupt
4	wMaxPacketSize	2	0008	Maximum Packet Size: 8 bytes
6	bInterval	1	04	Polling Interval



**USB DESCRIPTORS : REPORT DESCRIPTORS (KEYBOARD)**

<b>Byte #</b>	<b>Data</b>	<b>Mnemonic</b>	<b>Value</b>
0	Usage Page	05 01	Generic Desktop Control
2	Usage	09 06	Keyboard
4	Collection	A1 01	Application
6	Usage Page	05 07	Keyboard/Keypad Keys
8	Usage Minimum	19 E0	224
10	Usage Maximum	29 E7	231
12	Logical Minimum	15 00	0
14	Logical Maximum	25 01	1
16	Report Size	75 01	1
18	Report Count	95 08	8
20	Input	81 02	Data, Variable, Absolute
22	Report Size	75 01	1
24	Report Count	95 08	8
26	Input	81 03	Constant
28	Report Count	95 06	6
30	Report Size	75 01	1
32	Usage Page	05 08	LED
34	Usage Minimum	19 01	1
38	Usage Maximum	29 06	6
40	Output	91 02	Data, Variable, Absolute
42	Report Count	95 01	1
44	Report Size	75 02	2
46	Output	91 03	Constant
48	Report Count	95 06	6
50	Report Size	75 08	8
52	Logical Minimum	15 00	0
54	Logical Maximum	26 FF 00	255
56	Usage Page	05 07	Keyboard/Keypad Keys
58	Usage Minimum	19 00	0
60	Usage Maximum	29 FF	255
62	Input	81 00	Data, Array, Absolute
64	End Collection	C0	

**USB DESCRIPTORS, (CON'T)**

<b>Offset</b>	<b>Field</b>	<b>Size</b>	<b>Value</b>	<b>Description</b>
<b>HID Interface Descriptor (Mouse)</b>				
0	bLength	1	09	Interface Descriptor length
1	bDescriptorType	1	04	Interface Descriptor
2	bInterfaceNumber	1	01	Index for HID interface
3	bAlternateSetting	1	00	Alternate Setting index
4	bNumEndpoints	1	01	Number of endpoints in this interface. This includes one interrupt endpoint
5	bInterfaceClass	1	03	USB HID class
6	bInterfaceSubClass	1	01	Keyboard subclass
7	bInterfaceProtocol	1	02	Boot protocol
8	iInterface	1	00	Index for interface string descriptor – none
<b>HID Class Descriptor (Mouse)</b>				
0	bLength	1	09	HID Descriptor length
1	bDescriptorType	1	21	HID Descriptor
2	bcdHID	2	0101	HID Specification Release (1.01)
4	bCountryCode	1	00	Country Code (not supported)
5	bNumDescriptors	1	01	Number of class descriptors. The one descriptor is the report descriptor
6	bDescriptorType	1	22	Report Descriptor
7	wDescriptorLength	2	0034	Length of Report Descriptor
<b>EndPoint Descriptor (Mouse)</b>				
0	bLength	1	07	Endpoint Descriptor Length
1	bDescriptor type	1	05	Endpoint Descriptor
2	bEndpointAddress	1	84	Address:Endpoint4.IN
3	bmAttributes	1	03	Endpoint Attributes: interrupt
4	wMaxPacketSize	2	0004	Maximum Packet Size: 8 bytes
6	bInterval	1	04	Polling Interval



**USB DESCRIPTORS : REPORT DESCRIPTORS (MOUSE)**


<b>Byte #</b>	<b>Data</b>	<b>Mnemonic</b>	<b>Value</b>
0	Usage Page	05 01	Generic Desktop Control
2	Usage	09 02	Mouse
4	Collection	A1 01	Application
6	Usage	09 01	Pointer
8	Collection	A1 00	Physical
10	Usage Page	05 09	Button
12	Usage Minimum	19 01	1
14	Usage Maximum	29 03	3
16	Logical Minimum	15 00	0
18	Logical Maximum	25 01	1
20	Report Count	95 03	3
22	Report Size	75 01	1
24	Input	81 02	Data, Variable, Absolute
26	Report Count	95 01	1
28	Report Size	75 05	5
30	Input	81 01	Constant
32	Usage Page	05 01	Generic Desktop Control
34	Logical Minimum	15 81	-127
36	Logical Maximum	25 7F	127
38	Report Size	75 08	8
40	Report Count	95 03	3
42	Usage	09 30	X
44	Usage	09 31	Y
46	Usage	09 38	Wheel
48	Input	81 06	Data, Variable, Relative
50	End Collection	C0	
52	End Collection	C0	







# SEMTECH

SUGGESTED INTERFACING FOR THE GENIPSP2™

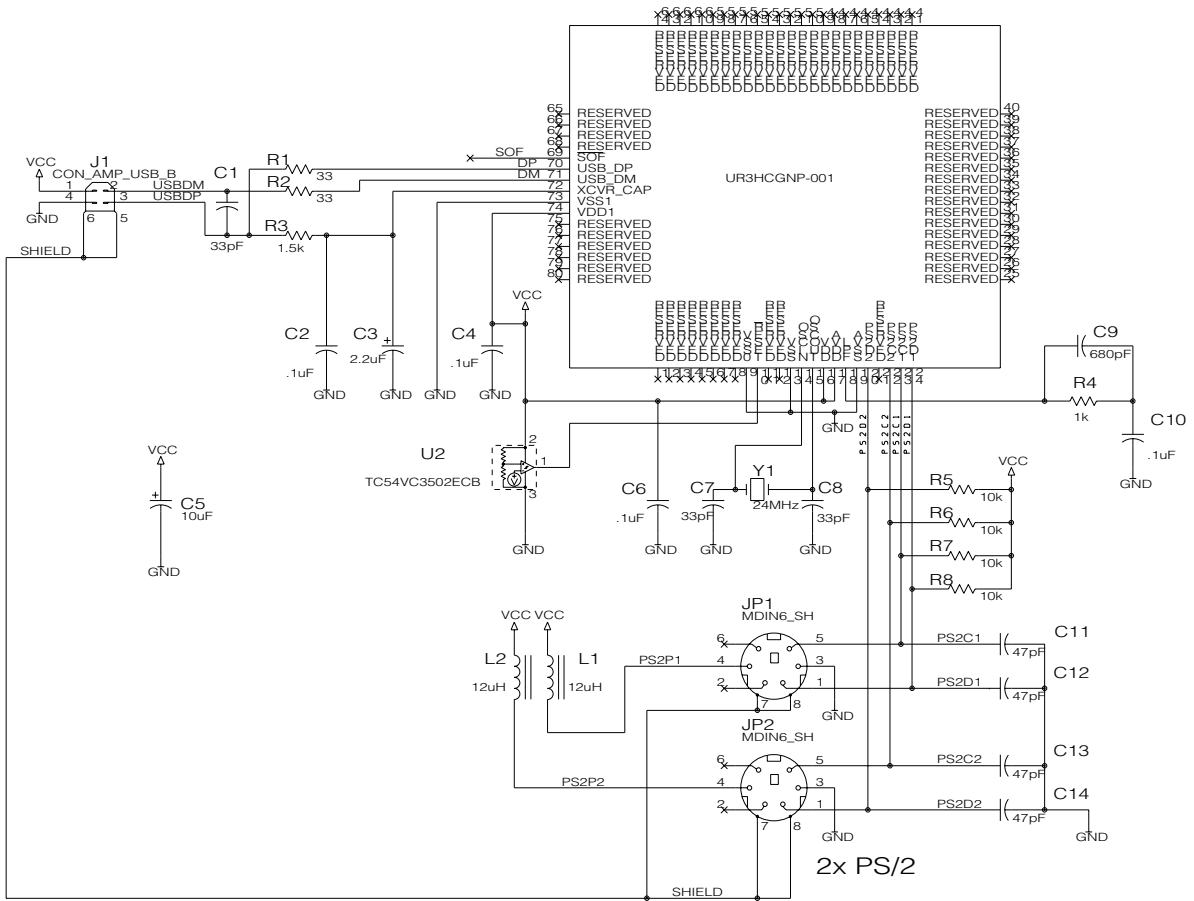

Copyright ©1999-2001 Semtech Corporation  
All rights reserved.

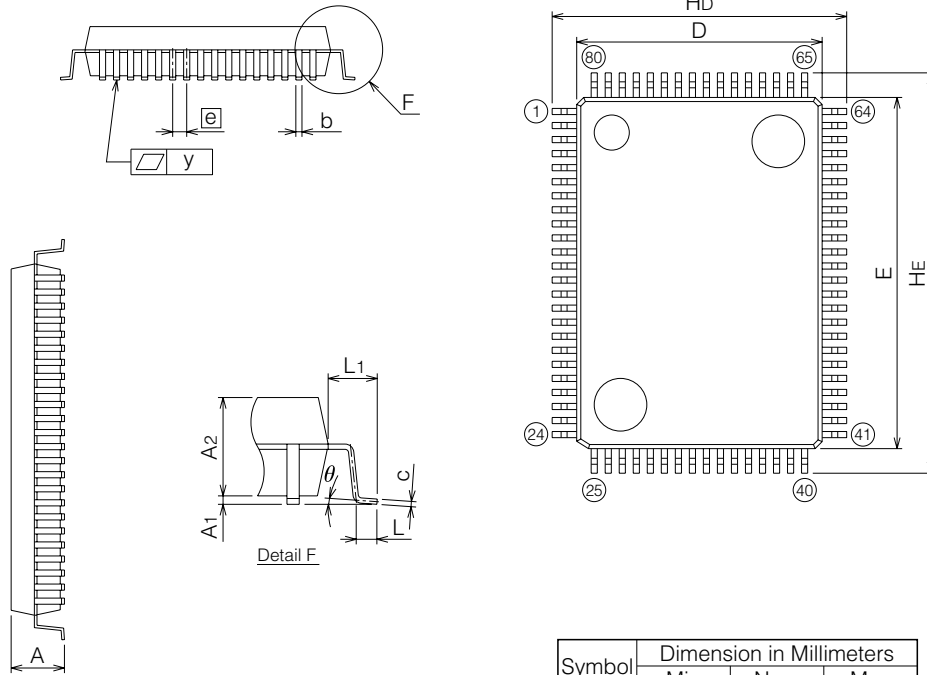

Recommended Mount Pad

Symbol	Dimension in Millimeters		
	Min	Nom	Max
A	-	-	3.05
A1	0	0.1	0.2
A2	-	2.8	-
b	0.3	0.35	0.45
c	0.13	0.15	0.2
D	13.8	14.0	14.2
E	19.8	20.0	20.2
e	-	0.8	-
Hd	16.5	16.8	17.1
HE	22.5	22.8	23.1
L	0.4	0.6	0.8
L1	-	1.4	-
y	-	-	0.1
$\theta$	0 <sub>j</sub>	-	10 <sub>i</sub>
b2	-	0.5	-
l2	1.3	-	-
MD	-	14.6	-
ME	-	20.6	-



## ELECTRICAL SPECIFICATIONS

### Absolute Maximum Ratings

Ratings	Symbol	Value	Unit
Supply Voltage	Vdd	-0.3 to 7.0	V
Input Voltage	Vin	Vss -0.3 to Vdd +0.3	V
Input Voltage USB D+, D-	Vin USB	-0.5 to +3.8	V
Operating Temperature	Ta	T low to T high	° C
UR3HCGNP-001-RH		-20 to +85	° C
Storage Temperature Range	Tstg	-40 to +125	° C

### DC Electrical Characteristics, Temperature range=T low to T high unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Supply Voltage	Vdd	+4.15	+5	+5.25	V
Input High Voltage	Vih	0.8Vdd			V
Input Low Voltage	Vil			0.2Vdd	V
Peak Output Current	Io	-10		+10	mA
Average Output Current	Io (avg)	-5		+5	mA
Output Voltage (Ioh = -10mA)	Voh	Vdd-2.0			V
(Iol = 10 mA)	Vol			2.0	V
Input Current	Iin	-5		+5	μA
Supply Current (Vdd=5.0 Vdc +/-10%, Vss=0, USB operating)	Idd		70	90	mA
Supply Current (Vdd=5.0 Vdc +/-10%, Vss=0, USB suspended)	Idd		200	250	μA

### Control Timing (Vdd=5.0 Vdc +/-10%, Vss=0 Vdc, Temperature range=T low to T high unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Frequency of Operation	fosc				MHz
■ Crystal Option			24.0		
■ External Clock Option			24.0		



GENIPS2™ BILL OF MATERIALS FOR PAGE 9 SCHEMATIC

**UR3HCGNP-001-XX BOM**

Description	Quantity	Manufacturer	Part#	Description
<b>Capacitors:</b>				
C1, C7, C8	3	Generic	Any	33pF, Ceramic, NPO/COG
C2,C4, C6, C10	4	Generic	Any	.1uF, Ceramic, X7R
C3	1	Generic	Any	2.2uF, Tantalum
C5	1	Generic	Any	10uF, Tantalum
C9	1	Generic	Any	680pF, Ceramic, NPO/COG
C11,C12,C13,C14	4	Generic	Any	47pF, Ceramic, NPO/COG
<b>ICs:</b>				
U1	1	Semtech	UR3GNP-001	GeniPS2™ IC
U2	1	Generic	TC54VC3502ECB	
<b>Resistors:</b>				
R1,R2	2	Generic	Any	33, 5%, 1/16W
R3	1	Generic	Any	1.5k, 5%, 1/16W
R4	1	Generic	Any	1.0k, 5%, 1/16W
R5, R6, R7, R8	4	Generic	Any	10k, 5%, 1/16W
<b>Resonator:</b>				
Y1	1	Generic	Any	24MHz
<b>Transistor:</b>				
Q1	1	Zetex	BSS84ZXCT	MOSFET_P Transistor, SMT, SOT-23
<b>Connector:</b>				
J1	1	Generic	Any	Con_AMP_USB_B
<b>Inductor:</b>				
L1, L2	2	Generic	Any	12uH



This Page Left Intentionally Blank

**For sales information  
and product literature,  
contact:**

HID & System Mgmt Division  
Semtech Corporation  
568 Broadway  
New York, NY 10012  
**hidinfo@semtech.com**  
**<http://www.semtech.com>**  
212 226 2042 Telephone  
212 226 3215 Telefax

Semtech Western Regional Sales  
805-498-2111 Telephone  
805-498-3804 Telefax

Semtech Central Regional Sales  
972-437-0380 Telephone  
972-437-0381 Telefax

Semtech Eastern Regional Sales  
203-964-1766 Telephone  
203-964-1755 Telefax

Semtech Asia-Pacific Sales Office  
+886-2-2748-3380 Telephone  
+886-2-2748-3390 Telefax

Semtech Japan Sales Office  
+81-45-948-5925 Telephone  
+81-45-948-5930 Telefax

Semtech Korea Sales Sales  
+82-2-527-4377 Telephone  
+82-2-527-4376 Telefax

Northern European Sales Office  
+44 (0)2380-769008 Telephone  
+44 (0)2380-768612 Telefax

Southern European Sales Office  
+33 (0)1 69-28-22-00 Telephone  
+33 (0)1 69-28-12-98 Telefax

Central European Sales Office  
+49 (0)8161 140 123 Telephone  
+49 (0)8161 140 124 Telefax

Copyright ©1999-2001 Semtech Corporation. All rights reserved.  
Geni and GeniPS2 are trademarks of Semtech Corporation.  
Semtech is a registered trademark of Semtech Corporation. All  
other trademarks belong to their respective companies.

**INTELLECTUAL PROPERTY DISCLAIMER**  
This specification is provided 'as is' with no warranties whatsoever including any warranty of merchantability, fitness for any particular purpose, or any warranty otherwise arising out of any proposal, specification or sample. A license is hereby granted to reproduce and distribute this specification for internal use only. No other license, expressed or implied to any other intellectual property rights is granted or intended hereby. Authors of this specification disclaim any liability, including liability for infringement of proprietary rights, relating to the implementation of information in this specification. Authors of this specification also do not warrant or represent that such implementation(s) will not infringe such rights.