

## LM4Q30TA

**Black & White DMTN LCD Module**  
(Handheld PC/Measuring Instruments)

### Features

- 12 cm [4.7"] QVGA format
- High contrast (30 : 1) B/W display
- Built-in Backlight (LED)
- Transflective display
- Fast response time (100 ms)
- Wide viewing angle (Horizontal: 80° Vertical: 120°)

### Specifications


Parameter		Unit
Display size	12 [4.7]	cm ["]
Dot Format (H x V)	320 x 240	dot
Dot Pitch (H x V)	0.30 x 0.30	mm
Active Area (H x V)	96.0 x 72.0	mm
Panel Type	DMTN	-
Panel Mode	Transflective	-
Color	B/W	color
Contrast	30 : 1/15 : 1*	-
Response Time	100	ms

Parameter		Unit
Brightness	15	cd/m <sup>2</sup>
Duty Ratio	1/241 to 1/248	-
Backlight	LED	-
Power Consumption Reflective Mode	40	mW
Transmissive Mode	600	mW
Outline dimensions (W x H x D)	148.0 x 107.0 x 9.0	mm
Weight	125	g
Operating temperature	0 to +50	°C
Storage temperature	-15 to +75	°C

\*...Contrast ratio : Reflective / Transmissive

### Outline Dimensions

unit : mm

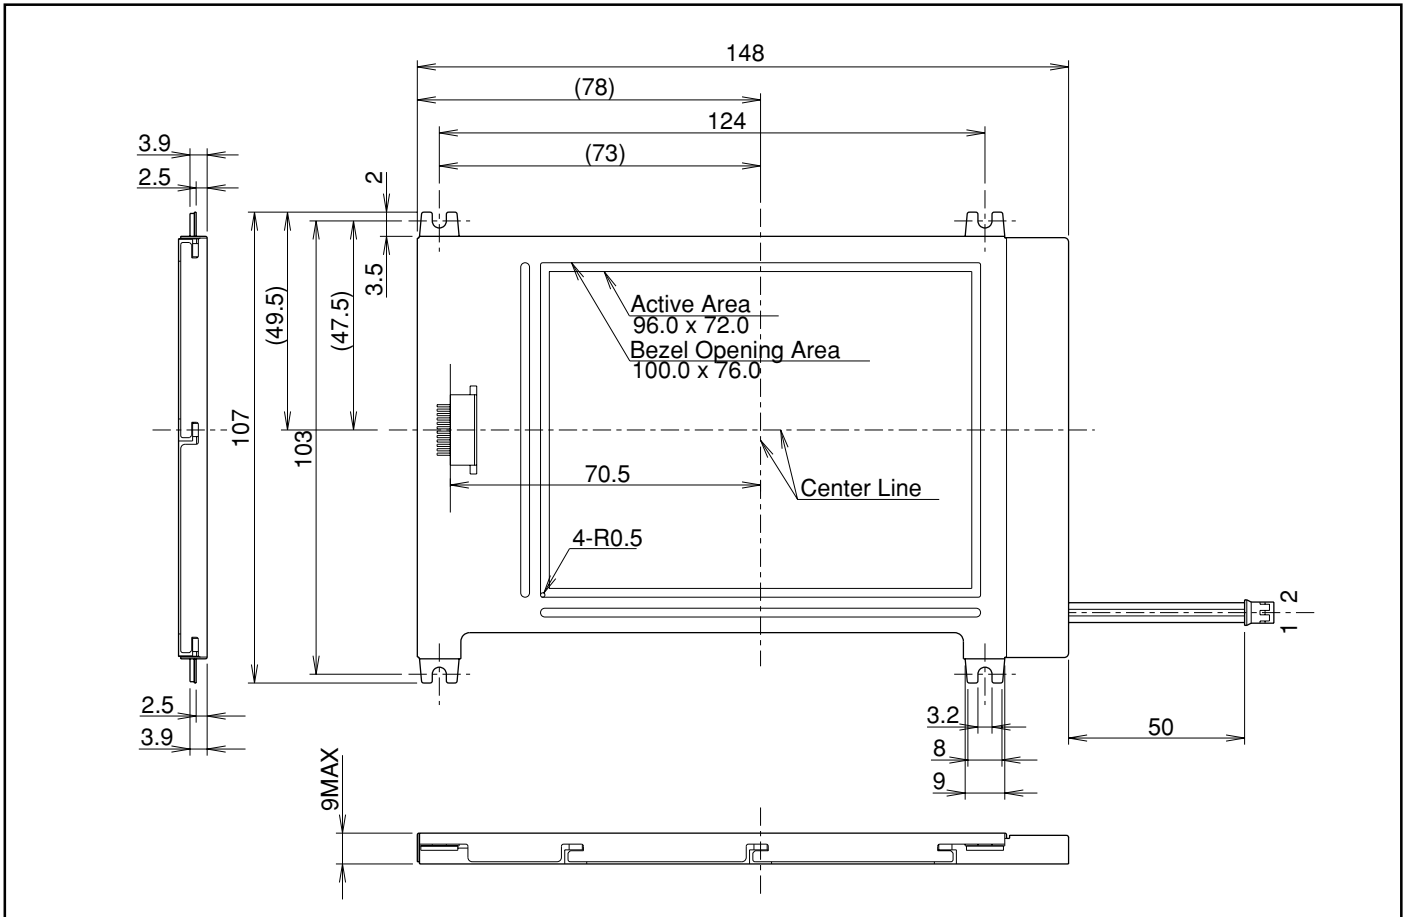

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. Specifications are subject to change without notice for improvement.