

GP1S39


Subminiature, Double-phase Output, Wide Gap Photointerrupter

■ Features

1. Ultra-compact package
2. PWB mounting type
3. Double-phase phototransistor output type
for detecting of rotation direction and count
4. Wide gap between light emitter and
detector: 1.5mm
5. Slit width: 0.8mm
6. Detecting pitch: 0.6mm

■ Outline Dimensions

(Unit : mm)

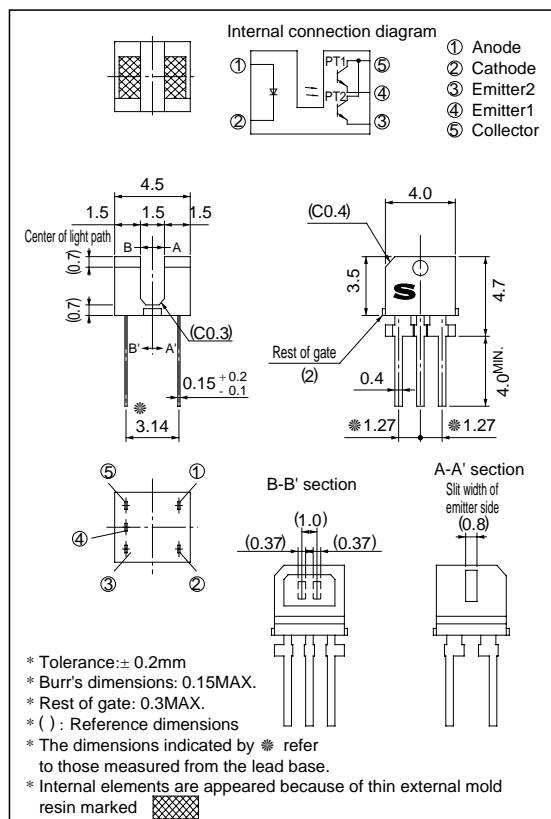


■ Applications

1. Mouses
2. Cameras

■ Absolute Maximum Ratings (Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
	Power dissipation	P	75	mW
Output	Collector-emitter voltage	V _{CE1O} V _{CE2O}	35	V
	Emitter-collector voltage	V _{E1CO} V _{E2CO}	6	V
	Collector current	I _C	20	mA
	Collector power dissipation	P _C	75	mW
	Total power dissipation	P _{tot}	100	mW
	Operating temperature	T _{opr}	- 25 to + 85	°C
	Storage temperature	T _{stg}	- 40 to + 100	°C
*1 Soldering temperature		T _{sol}	260	°C

*1 For 5 seconds

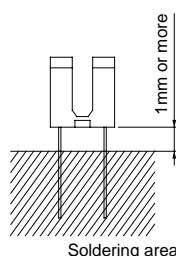

■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	10	μA
Output	Collector dark current	I _{CEO}	V _{CE} = 20V	-	-	100	nA
Transfer characteristics	Collector current	I _C	V _{CE} = 5V, I _F = 4mA	130	-	520	μA
	Collector current ratio	I _{C1} /I _{C2}	V _{CE} = 5V, I _F = 4mA	0.67	-	1.5	-
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = 8mA, I _C = 50 μA	-	-	0.4	V
	Response time	t _r	V _{CE} = 5V, I _C = 100 μA	-	50	150	μs
	Rise time		R _L = 1 000 Ω	-	50	150	μs
	Fall time	t _f					

Fig. 1 Forward Current vs. Ambient Temperature

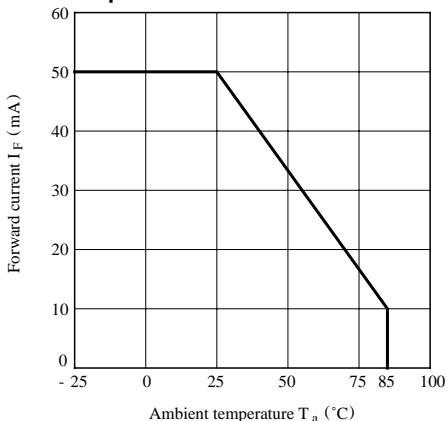


Fig. 2 Power Dissipation vs. Ambient Temperature

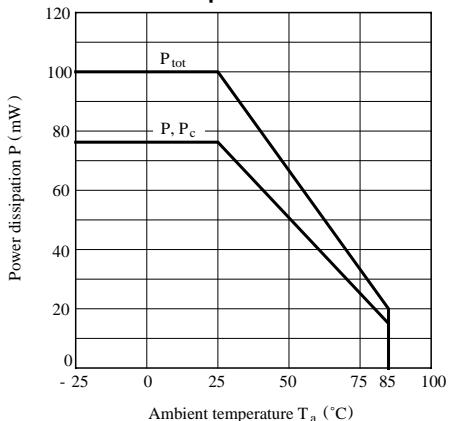


Fig. 3 Forward Current vs. Forward Voltage



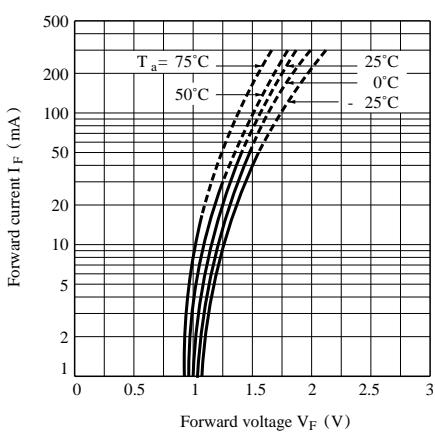



Fig. 4 Collector Current vs. Forward Current

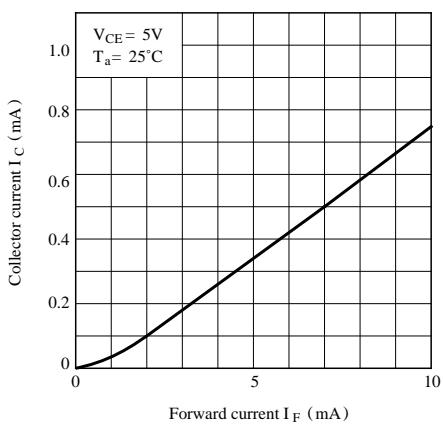


**Fig. 5 Collector Current vs.
Collector-emitter Voltage**

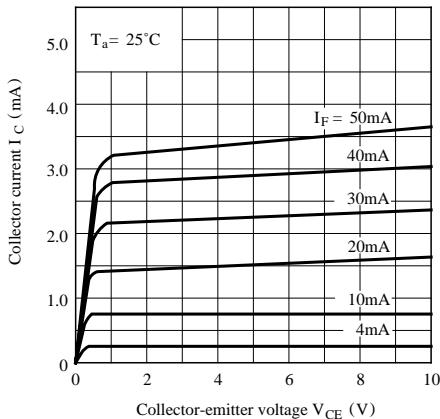


**Fig. 6 Collector Current vs.
Ambient Temperature**

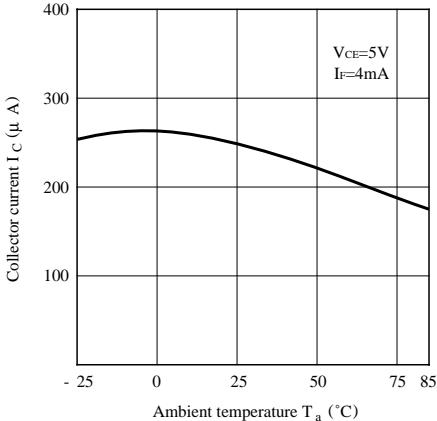


**Fig. 7 Collector-emitter Saturation Voltage
vs. Ambient Temperature**

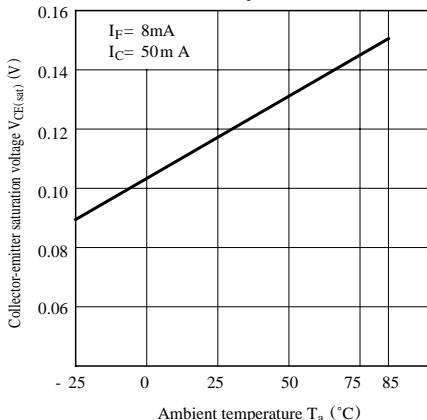


**Fig. 8 Collector Dark Current vs.
Ambient Temperature**

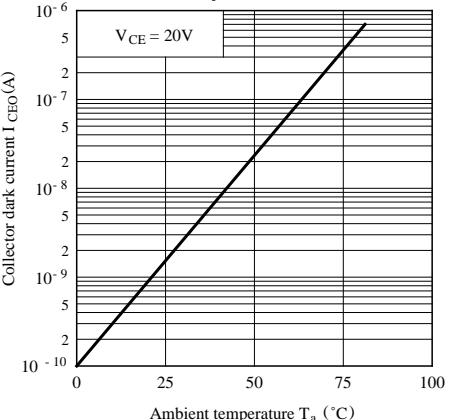

**Fig. 9 Response Time vs.
Load Resistance**

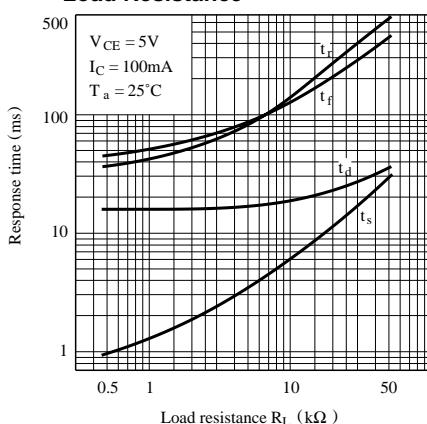


Test Circuit for Response Time

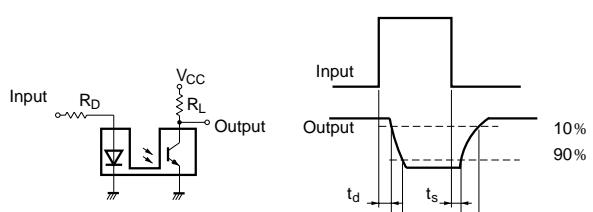


10% 90%

**Fig.10 Relative Collector Current vs.
Shield Distance (1)**

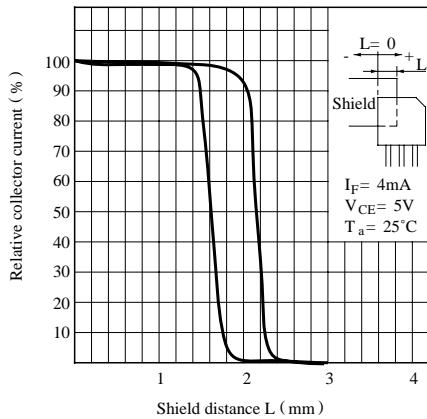

**Fig.11 Relative Collector Current vs.
Shield Distance (2)**

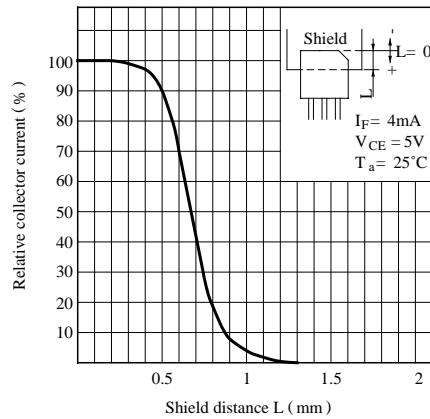

- Please refer to the chapter “Precautions for Use”.