

SHINDENGEN

Super Fast Recovery Rectifiers

Single

SF5L30

300V 5A


FEATURES

- trr30ns
- Fully Isolated Molding
- Dielectric strength 2kV guaranteed

APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment
- Telecommunication, Factory Automation

OUTLINE DIMENSIONS

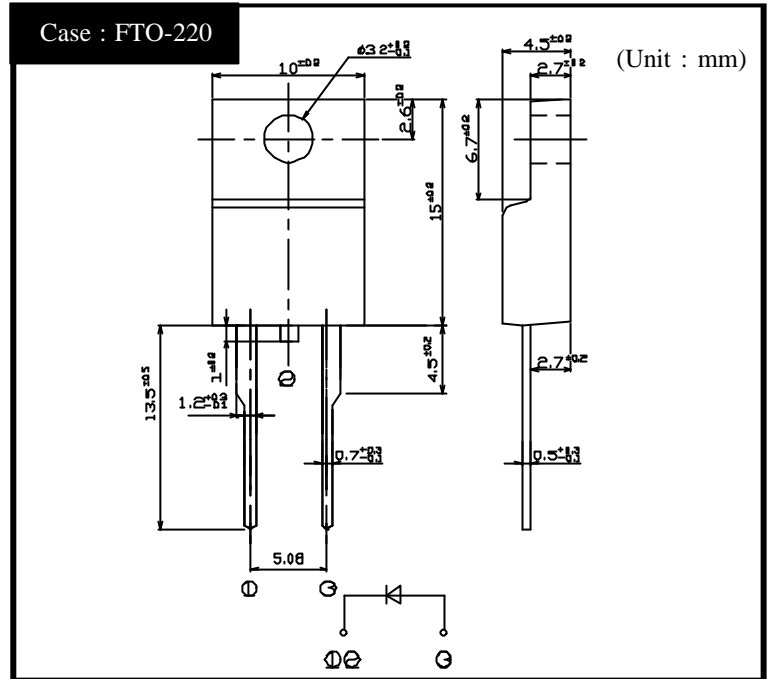

RATINGS

Absolute Maximum Ratings (If not specified Tc=25)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-55 ~ 150	
Operating Junction Temperature	Tj		150	
Maximum Reverse Voltage	V _{RM}		300	V
Average Rectified Forward Current	I _O	50Hz sine wave, R-load, Tc=130	5	A
Peak Surge Forward Current	I _{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25	60	A
Dielectric Strength	Vdis	Terminals to case, AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

Electrical Characteristics (If not specified Tc=25)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V _F	I _F =5A, Pulse measurement	Max.1.3	V
Reverse Current	I _R	V _R =V _{RM} , Pulse measurement	Max.25	μA
Reverse Recovery Time	trr	I _F =0.5A, k=1A	Max.30	ns
Junction Capacitance	Cj	f=1MHz, V _R =10V	TYP 50	pF
Thermal Resistance	θc	junction to case	Max.3.4	/W


SF5L30

Forward Voltage

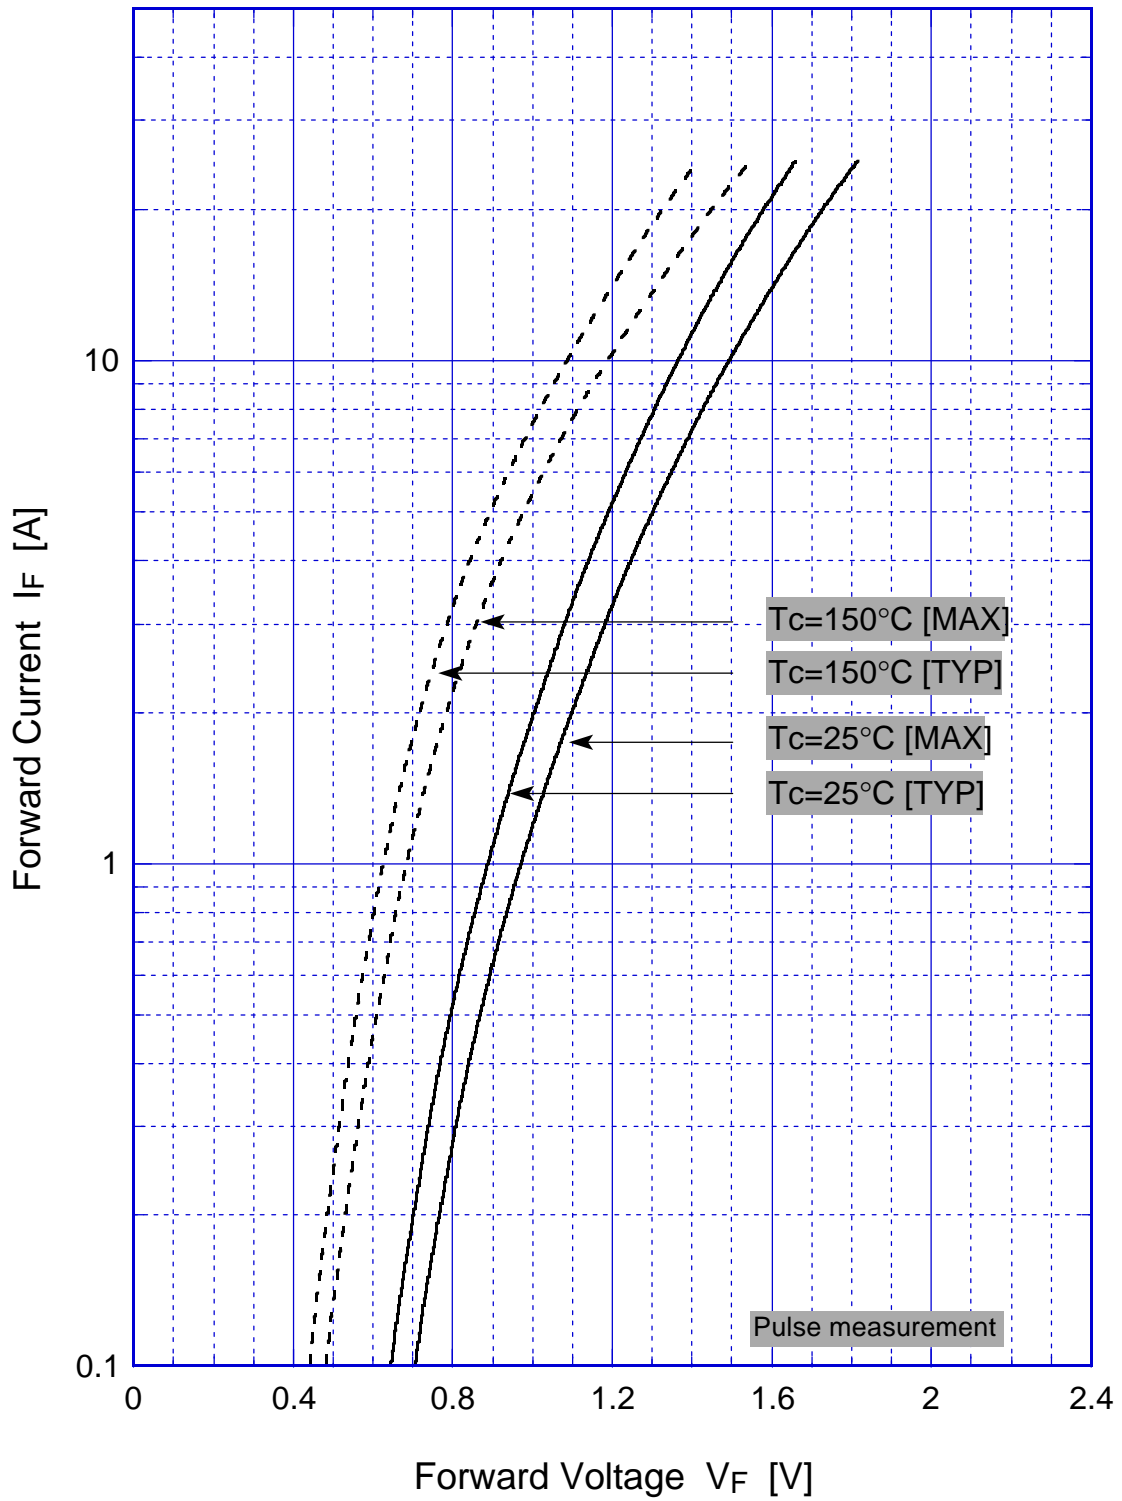


SF5L30

Forward Power Dissipation

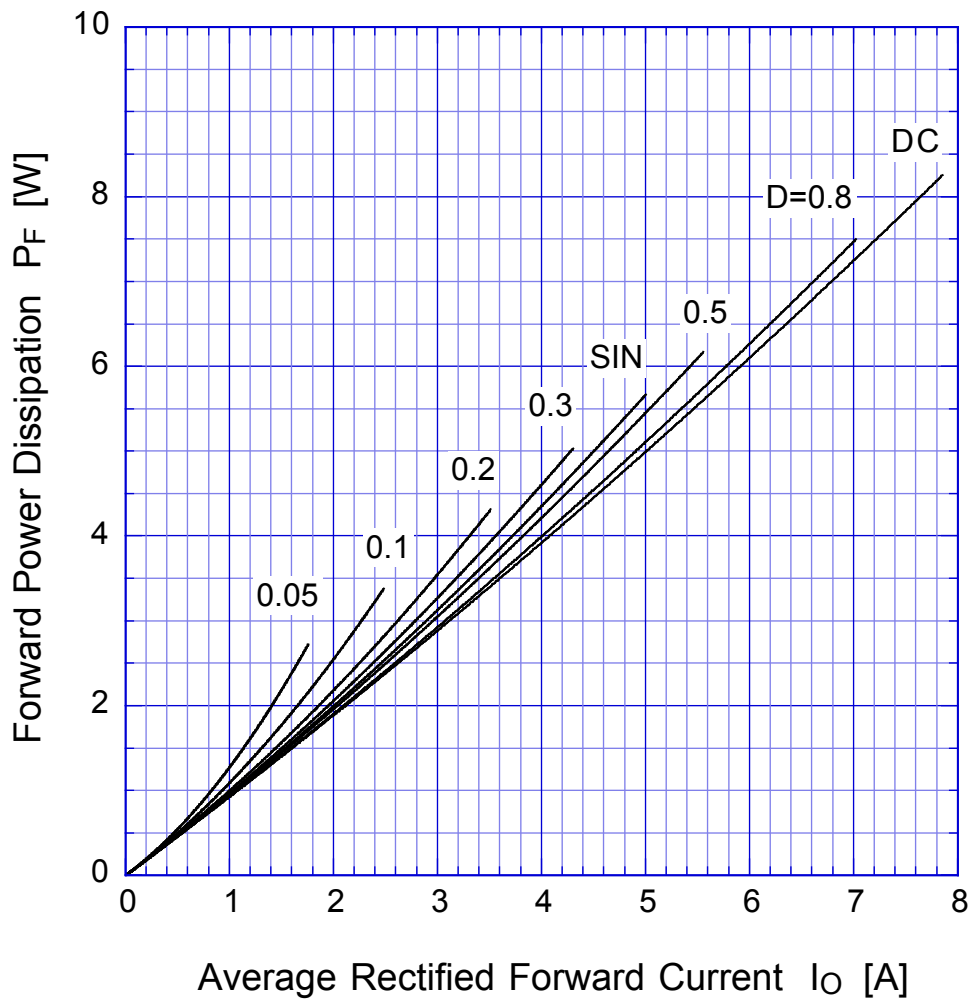


$T_j = 150^\circ\text{C}$

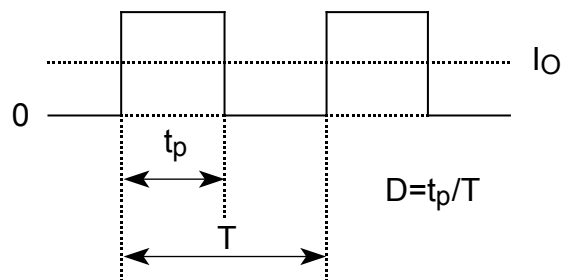


SF5L30

Peak Surge Forward Capability

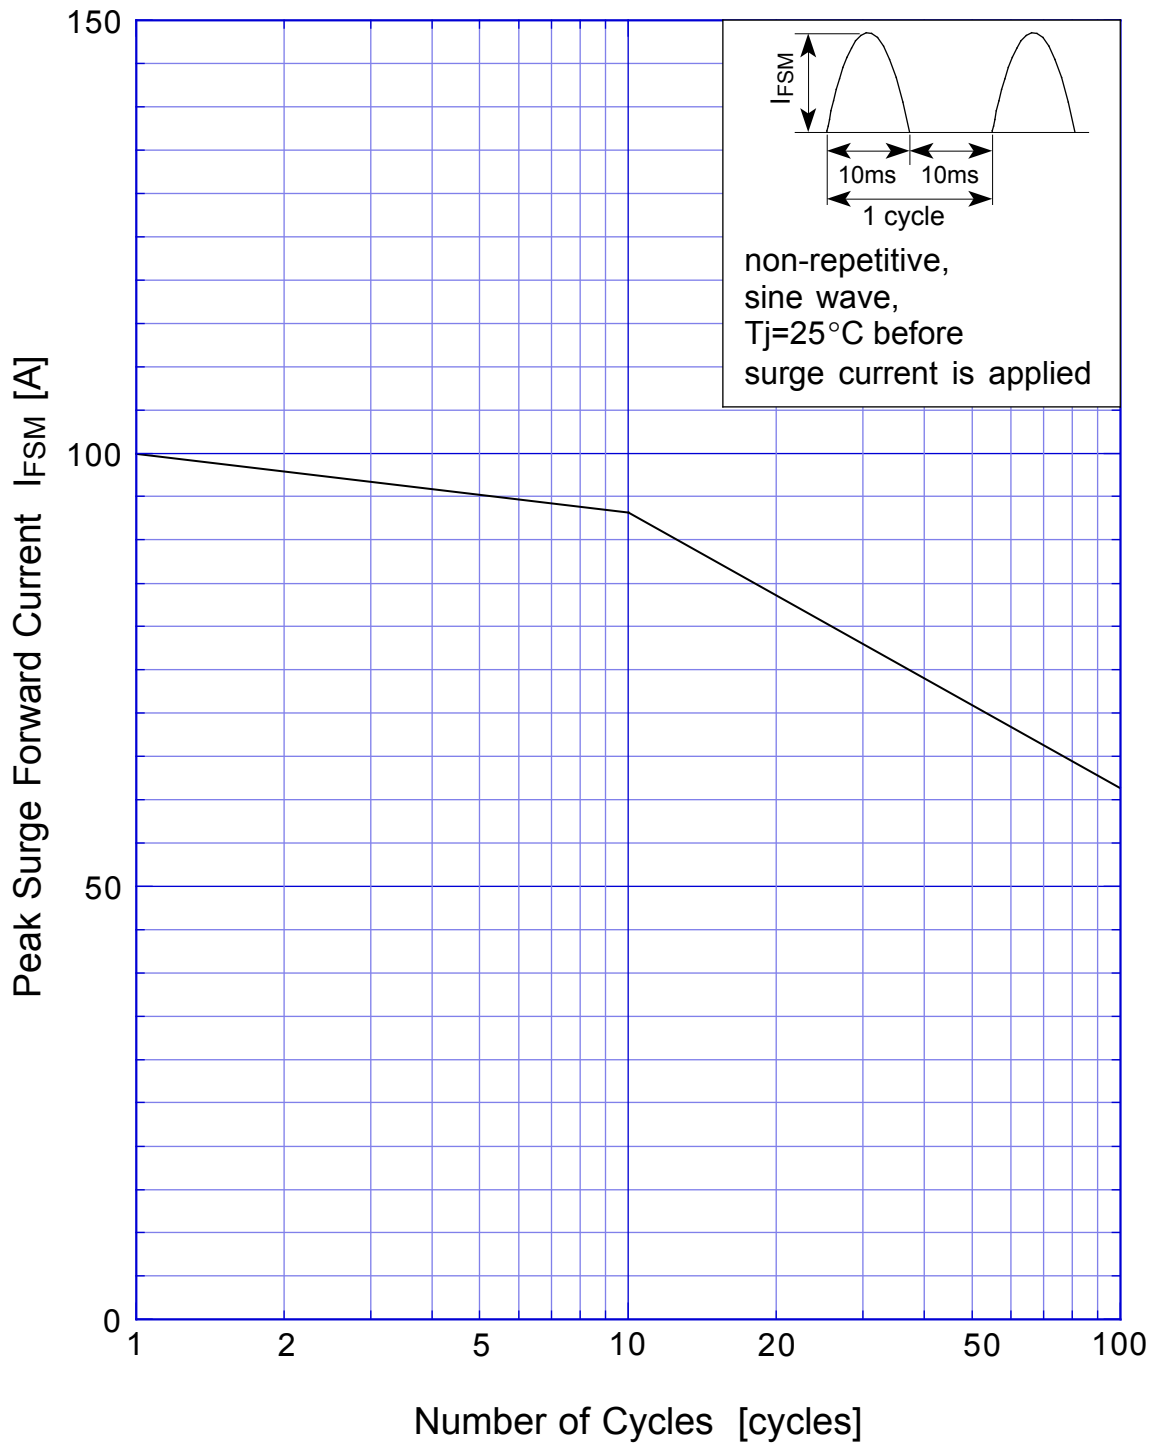

SF5L30

Derating Curve

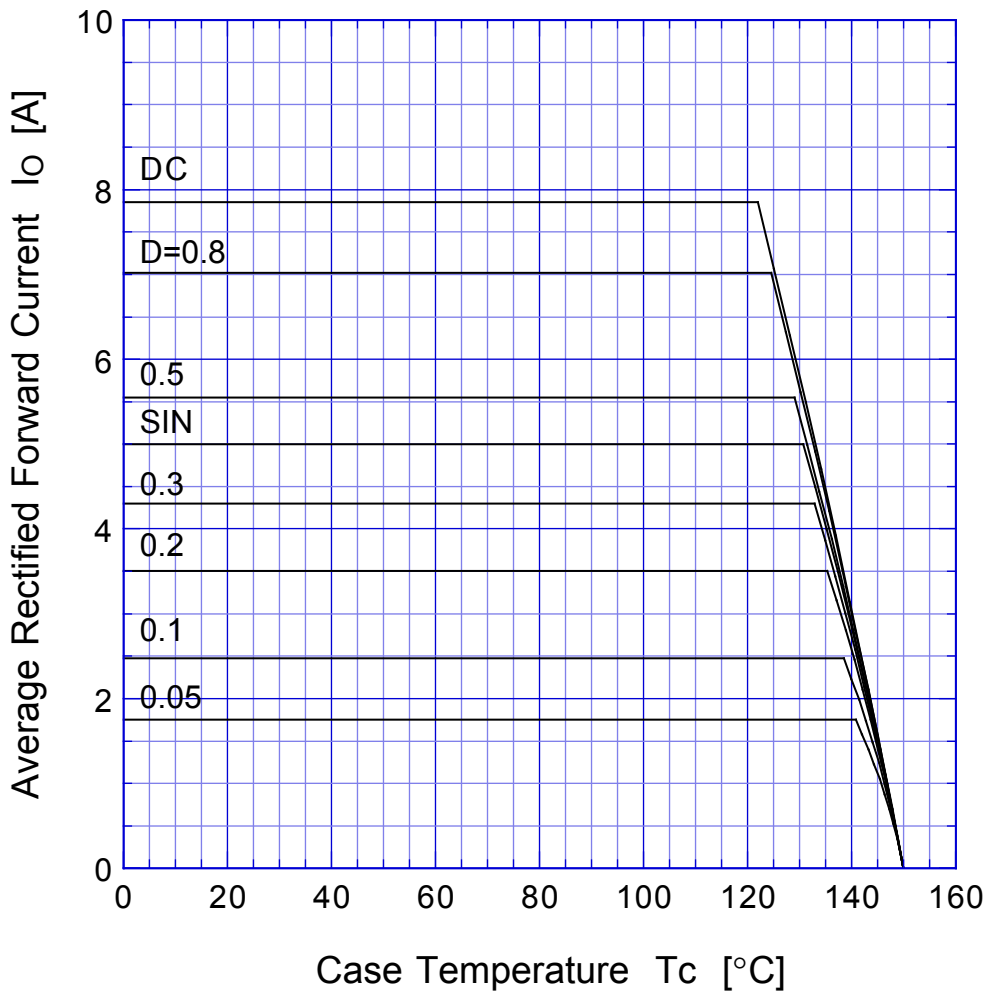

$$V_R = V_{RM}$$



SF5L30 Junction Capacitance

