

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

DF40SC3L

30V 40A


FEATURES

- SMT
- Tj150
- Low $V_F=0.45V$
- P_{RRSM} avalanche guaranteed
- High current capacity with Small Package

APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

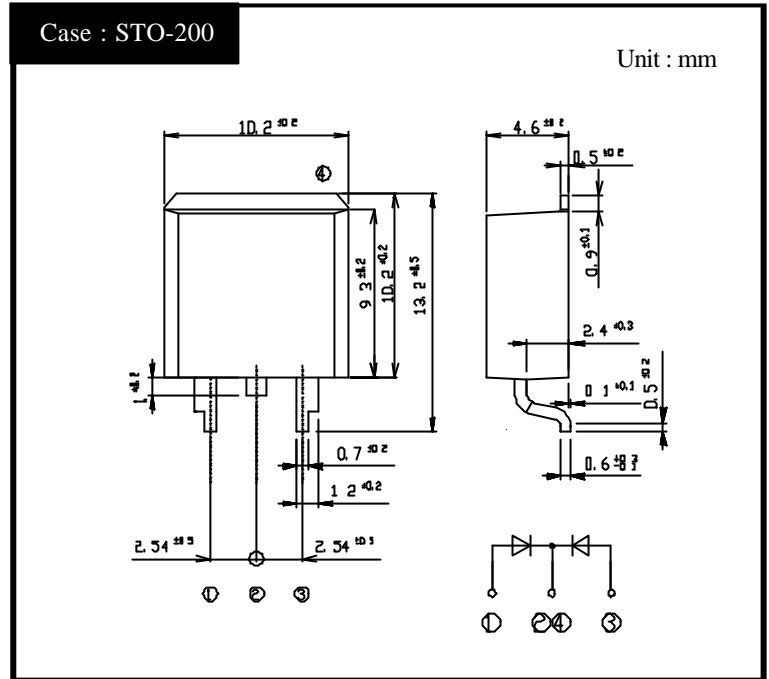

RATINGS


Absolute Maximum Ratings (If not specified $T_c=25$)

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55 ~ 150	
Operating Junction Temperature	T_j		150	
Maximum Reverse Voltage	V_{RM}		30	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	35	V
Average Rectified Forward Current	I_o	50Hz sine wave, R-load, Rating for each diode $I_o/2$, $T_c=112$	40	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Rating of per diode, $T_j=25$	400	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μ s, Rating of per diode, $T_j=25$	1000	W


Electrical Characteristics (If not specified $T_c=25$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=15A$, Pulse measurement, Rating of per diode	Max.0.45	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.17	mA
Junction Capacitance	C_j	$f=1MHz$, $V_R=10V$, Rating of per diode	Typ.1200	pF
Thermal Resistance	j_c	junction to case	Max.1.5	/W


DF40SC3L Forward Voltage

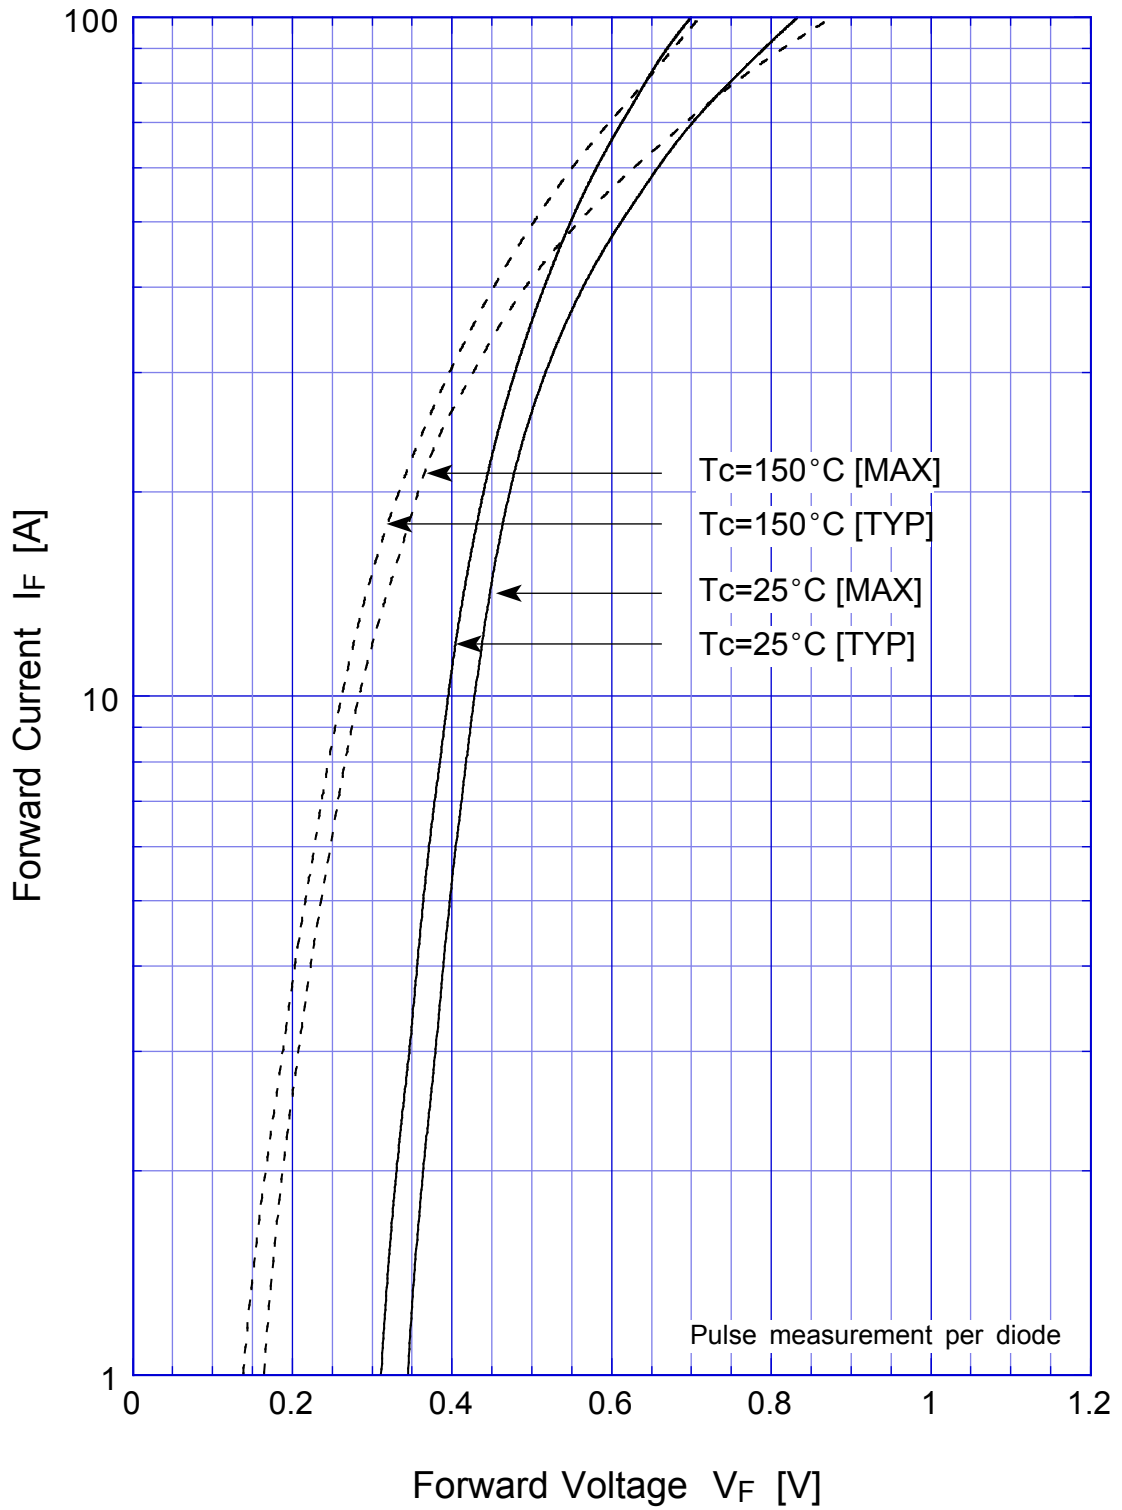


DF40SC3L Junction Capacitance

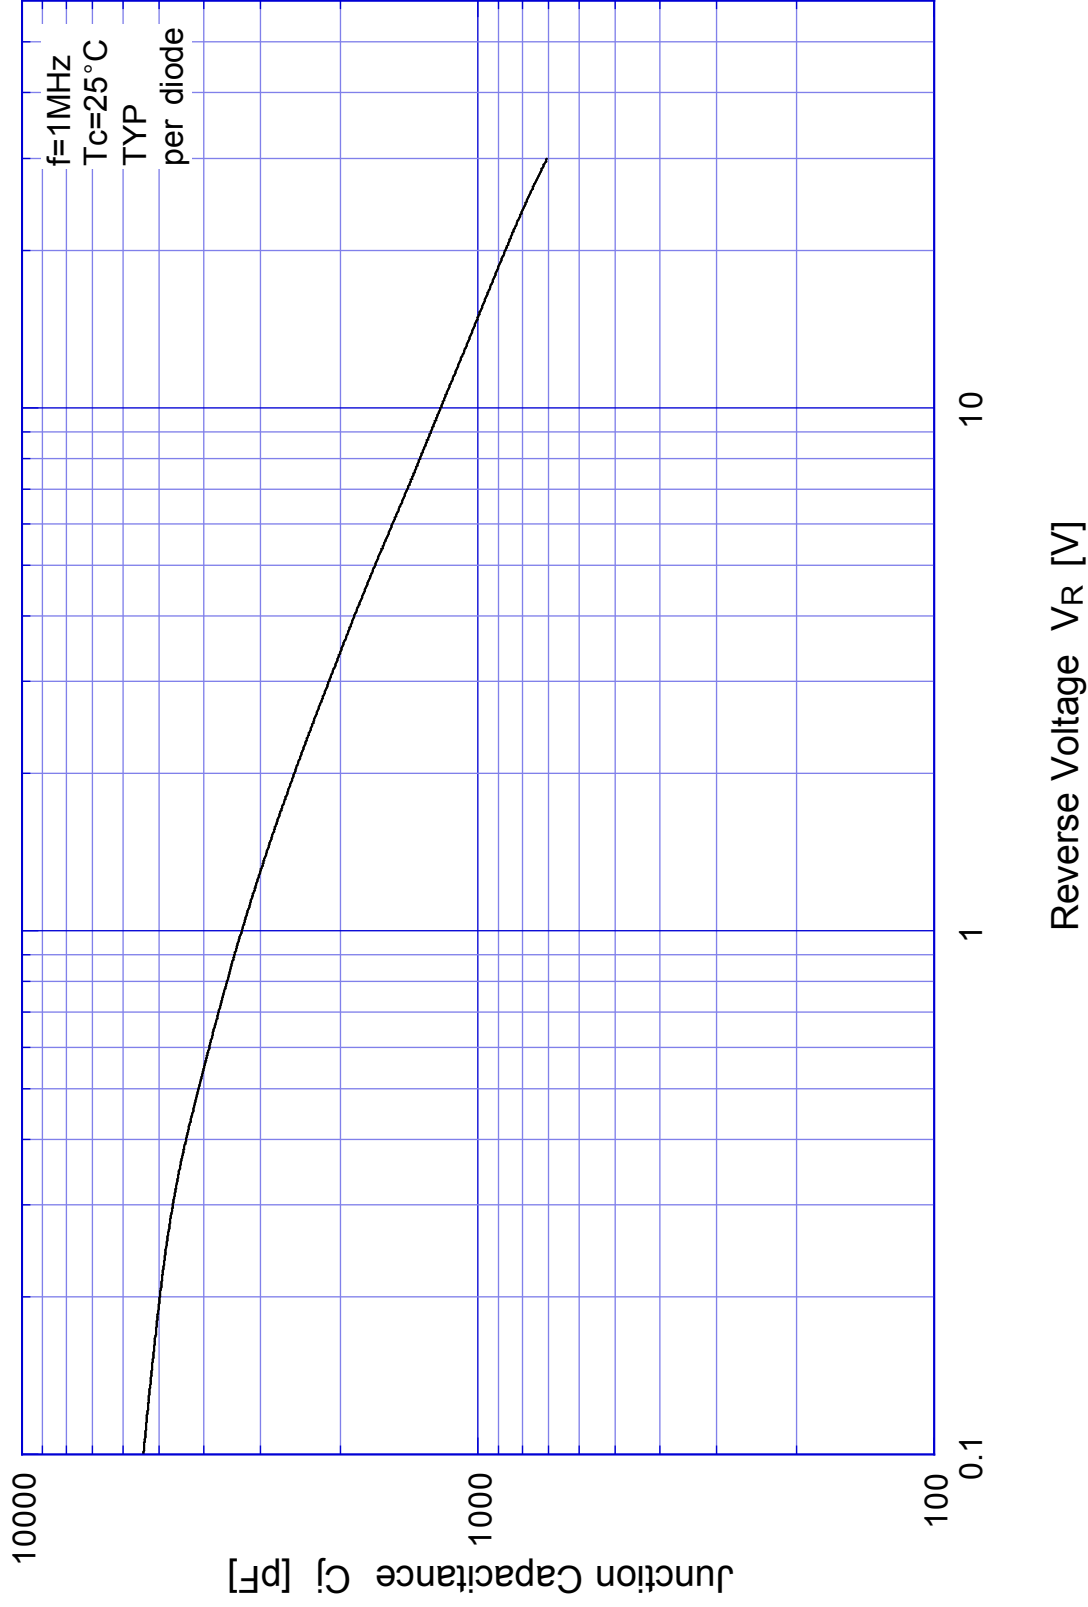


DF40SC3L Reverse Current

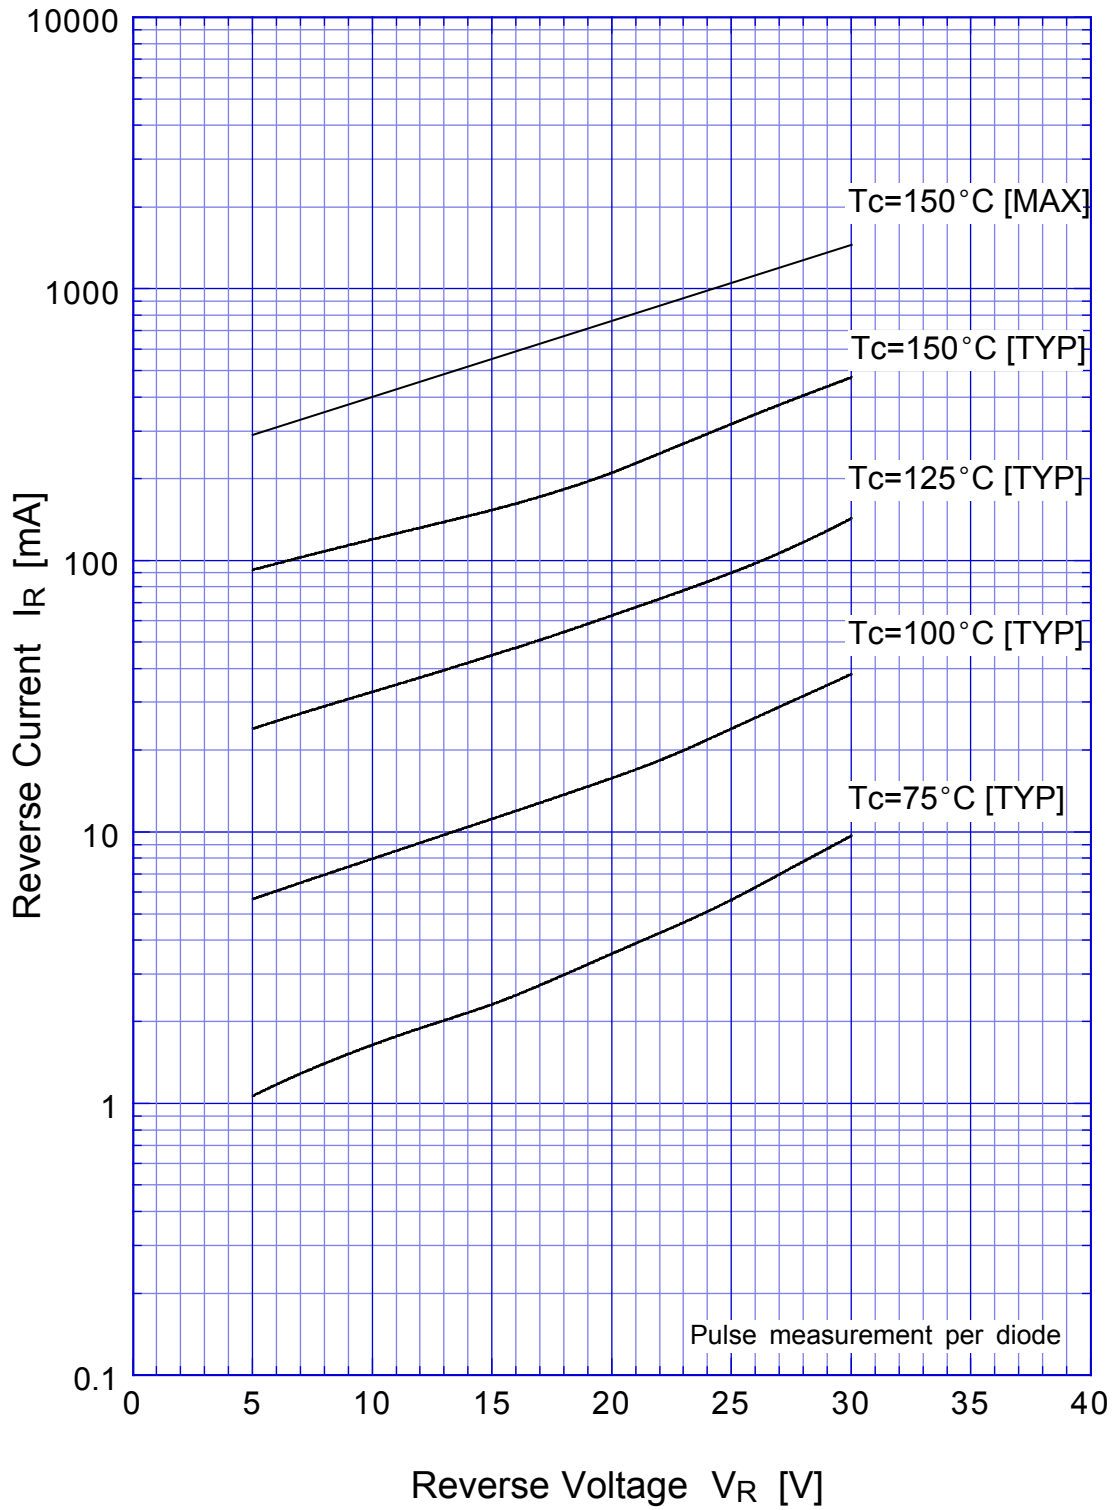


DF40SC3L Reverse Power Dissipation

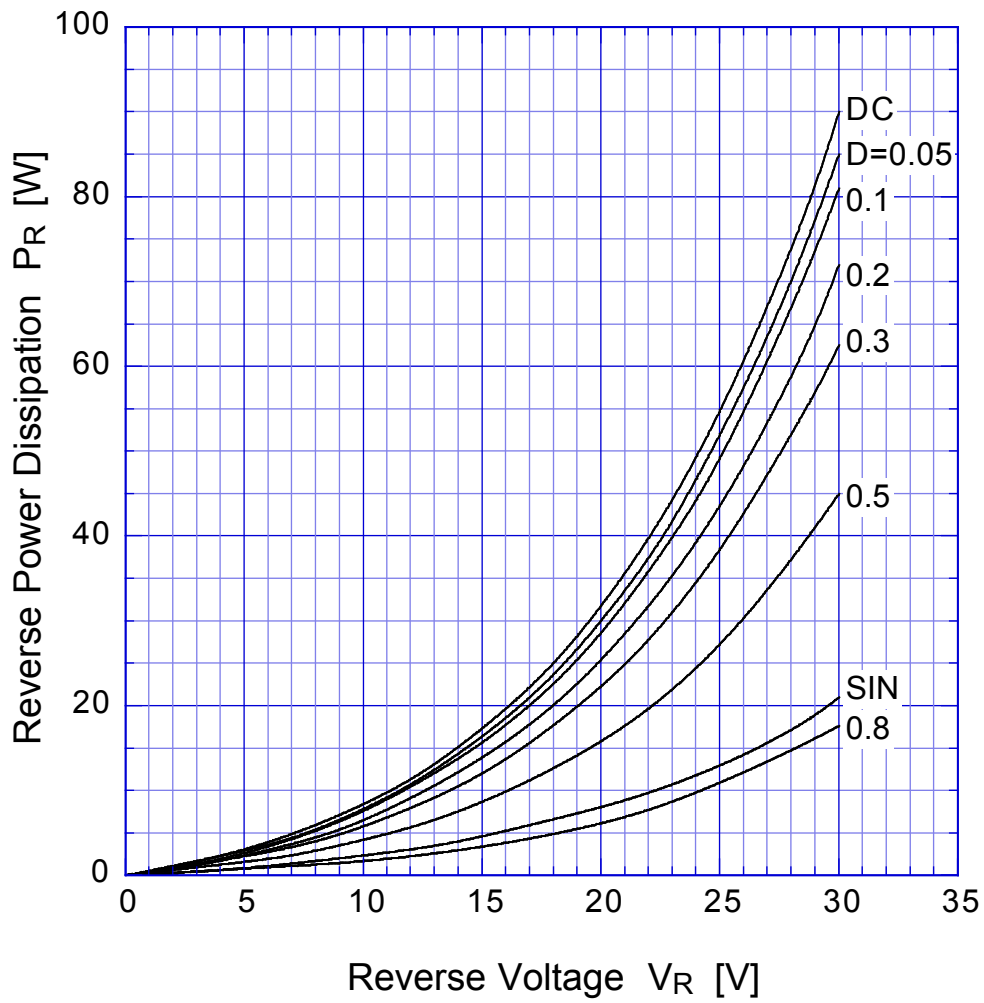


$T_j = 150^\circ\text{C}$

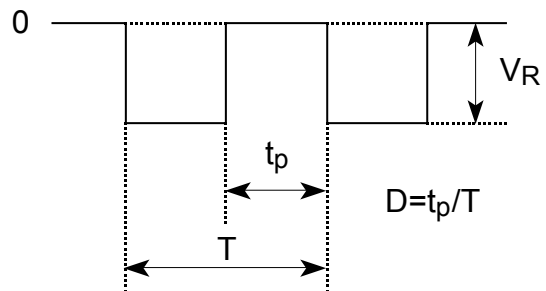

DF40SC3L Forward Power Dissipation

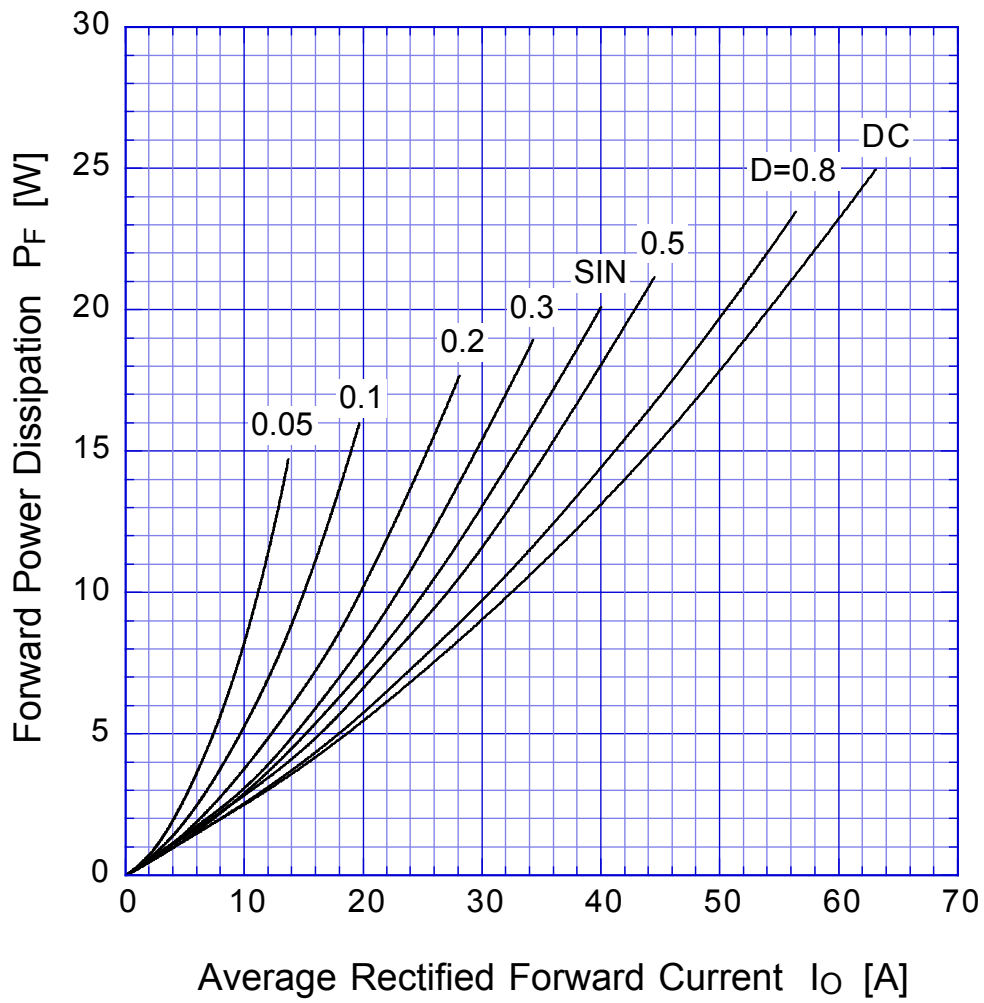


$T_j = 150^\circ\text{C}$

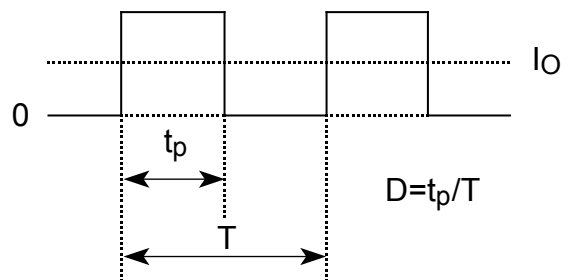


DF40SC3L


Derating Curve

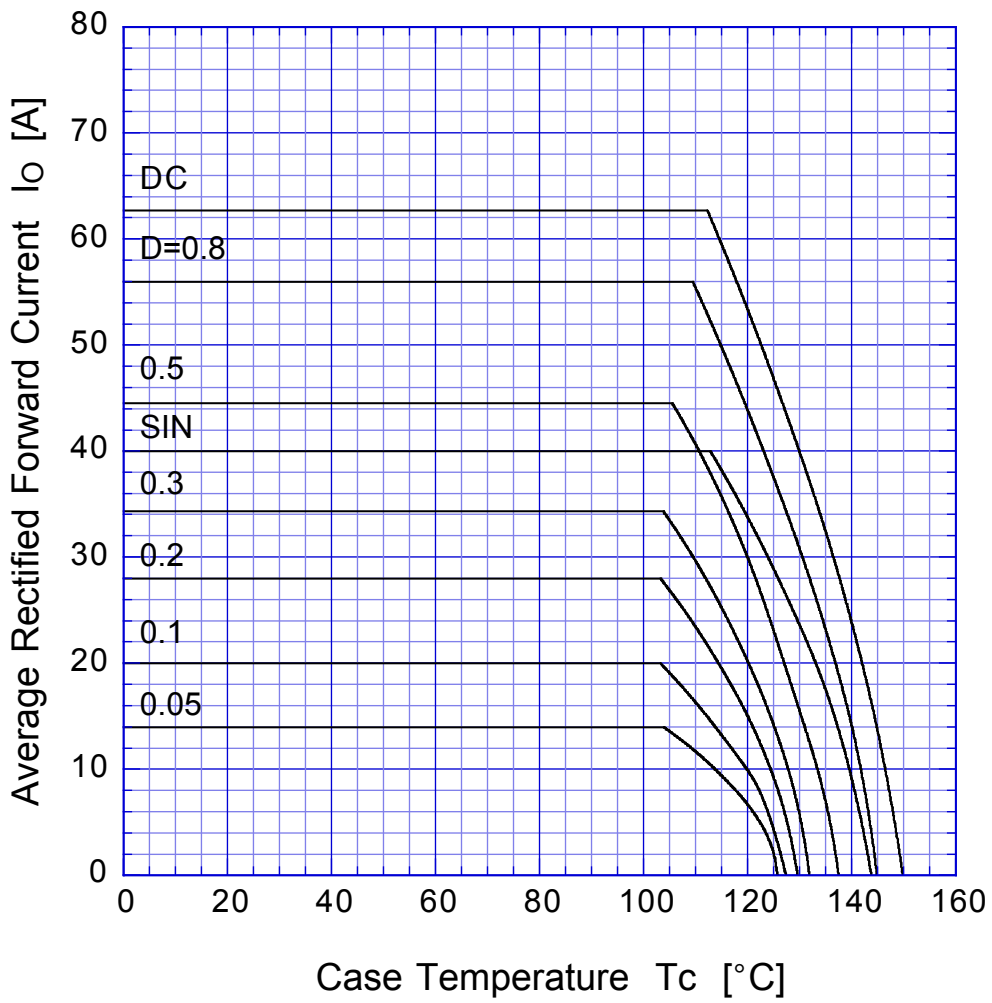



$V_R = 15V$

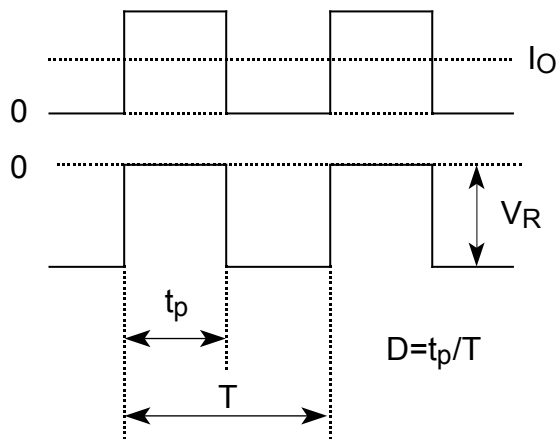

DF40SC3L Peak Surge Forward Capability

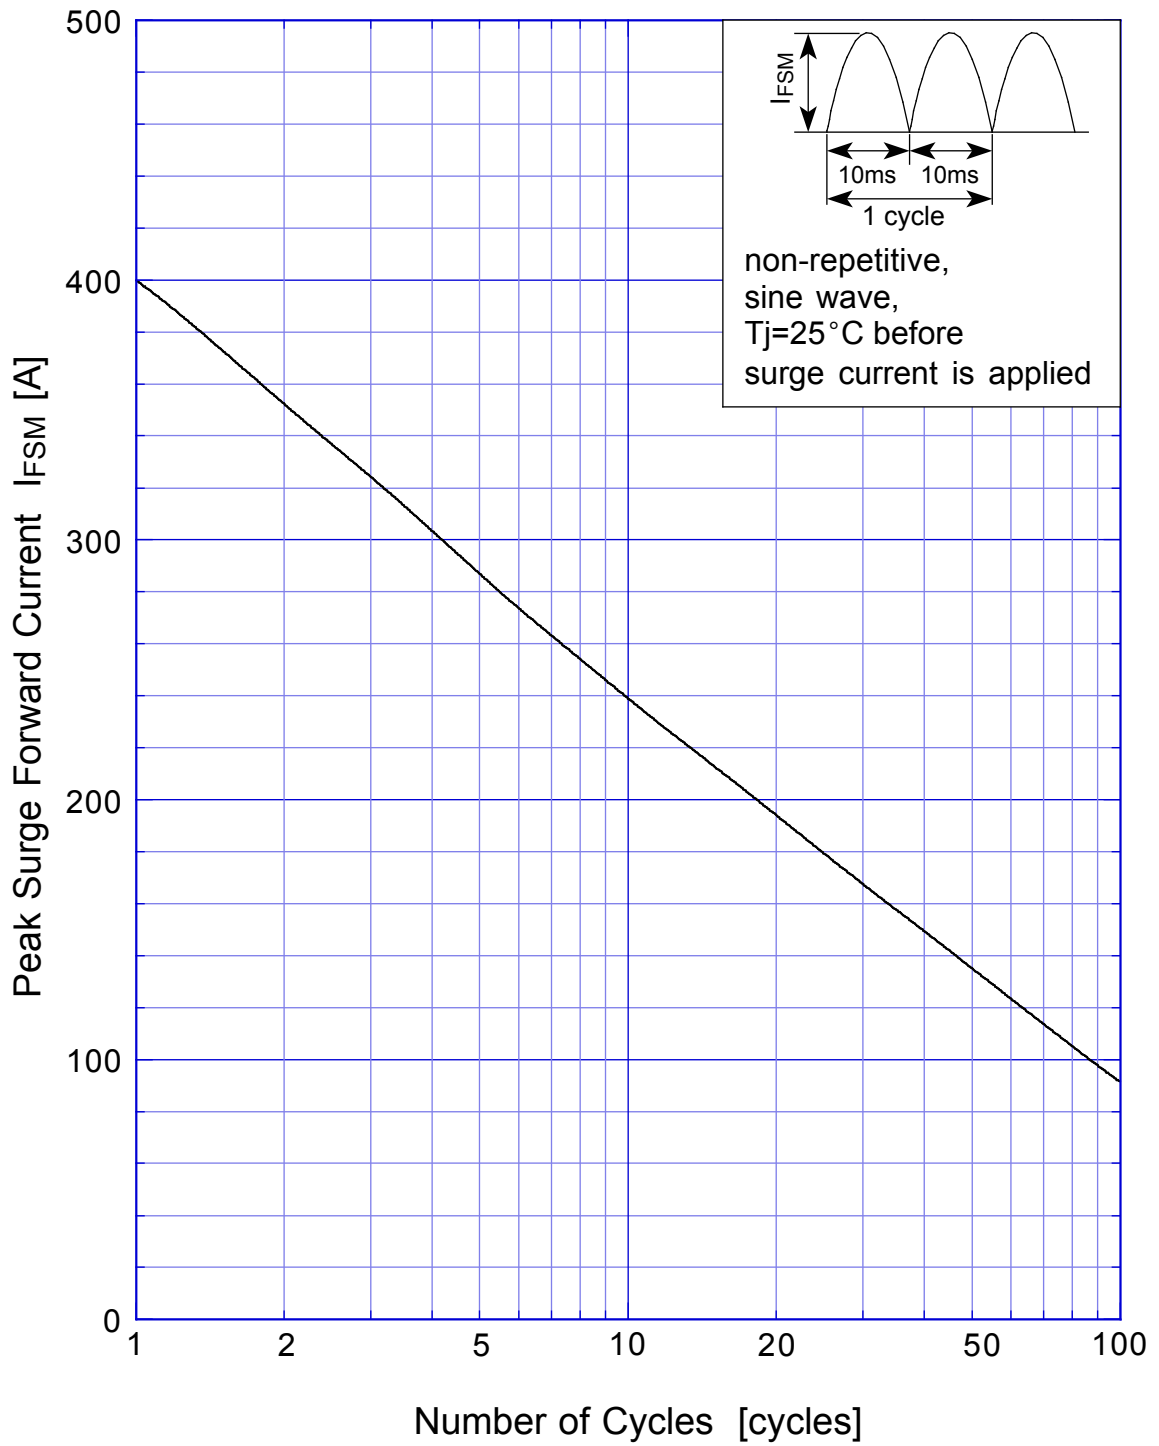

SBD Repetitive Surge Reverse Power Derating Curve

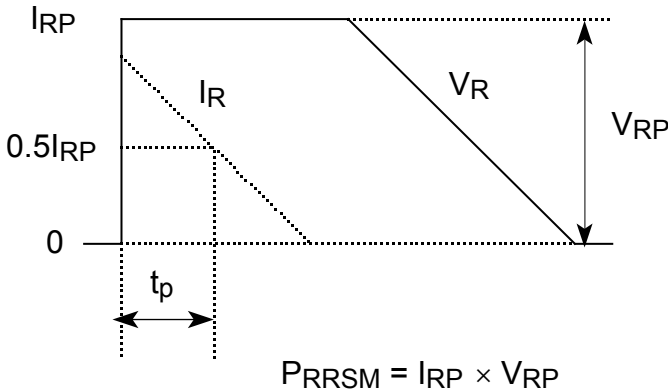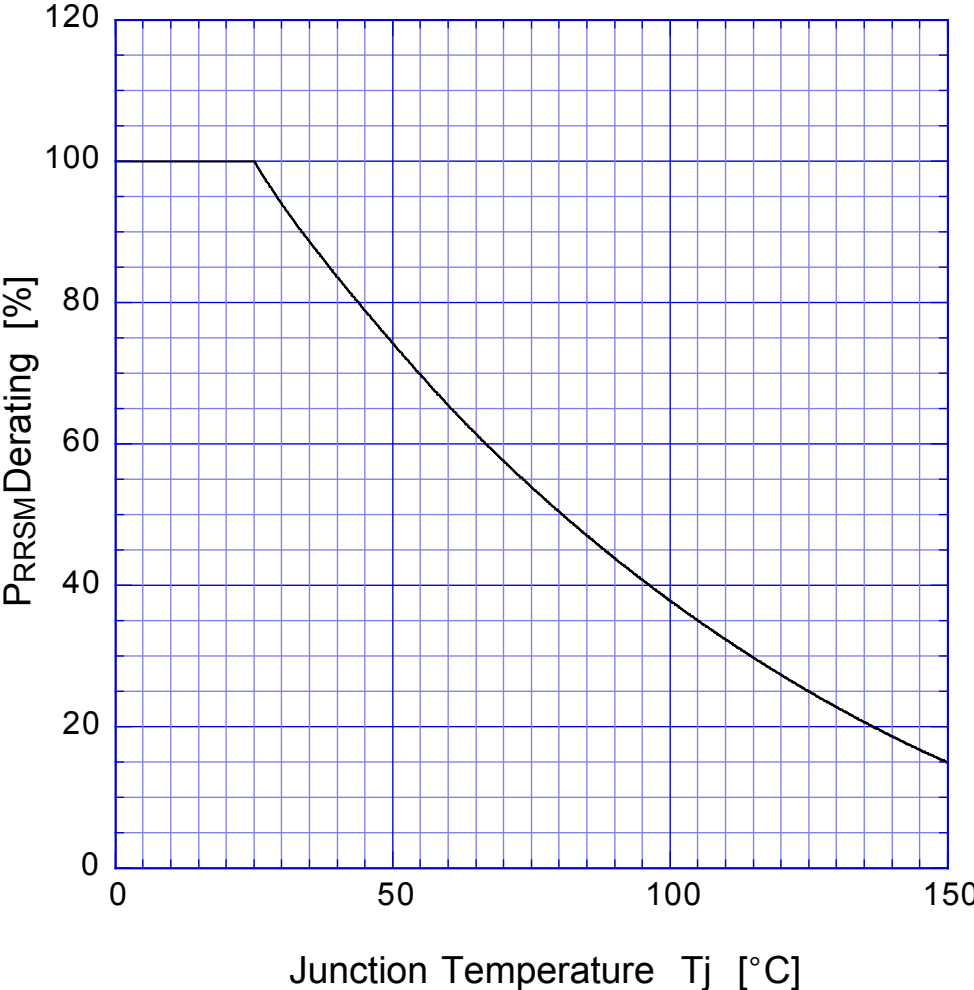

SBD

Repetitive Surge Reverse Power Capability

