


ST70-27F

OUTLINE DIMENSIONS

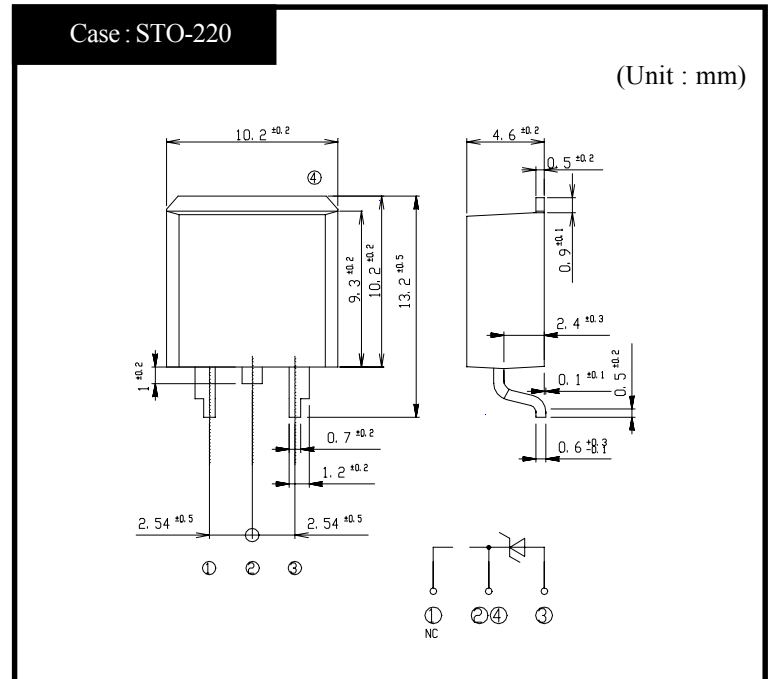

RATINGS

● Absolute Maximum Ratings


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T _{stg}		-40~150	°C
Junction Temperature	T _j		150	°C
Peak Surge Reverse Power	P _{RSM}	10/1000 μ s, Non-repetitive	7000	W
Peak Surge Reverse Current	I _{RSM}	10/1000 μ s, Non-repetitive	180	A
Maximum Reverse Voltage	V _{RM}		23	V

● Electrical Characteristics (T_I=25°C)


Item	Symbol	Conditions	Ratings	Unit
Breakdown Voltage	V _{BR}	I _R = 1mA	24.3~29.7	V
Clamping Voltage	V _{CL}	I _{PP} = 180A	MAX 40	V
Off-State Current	I _R	V _R = V _{RM}	MAX 5	μ A

ST70-27F

Clamping Voltage

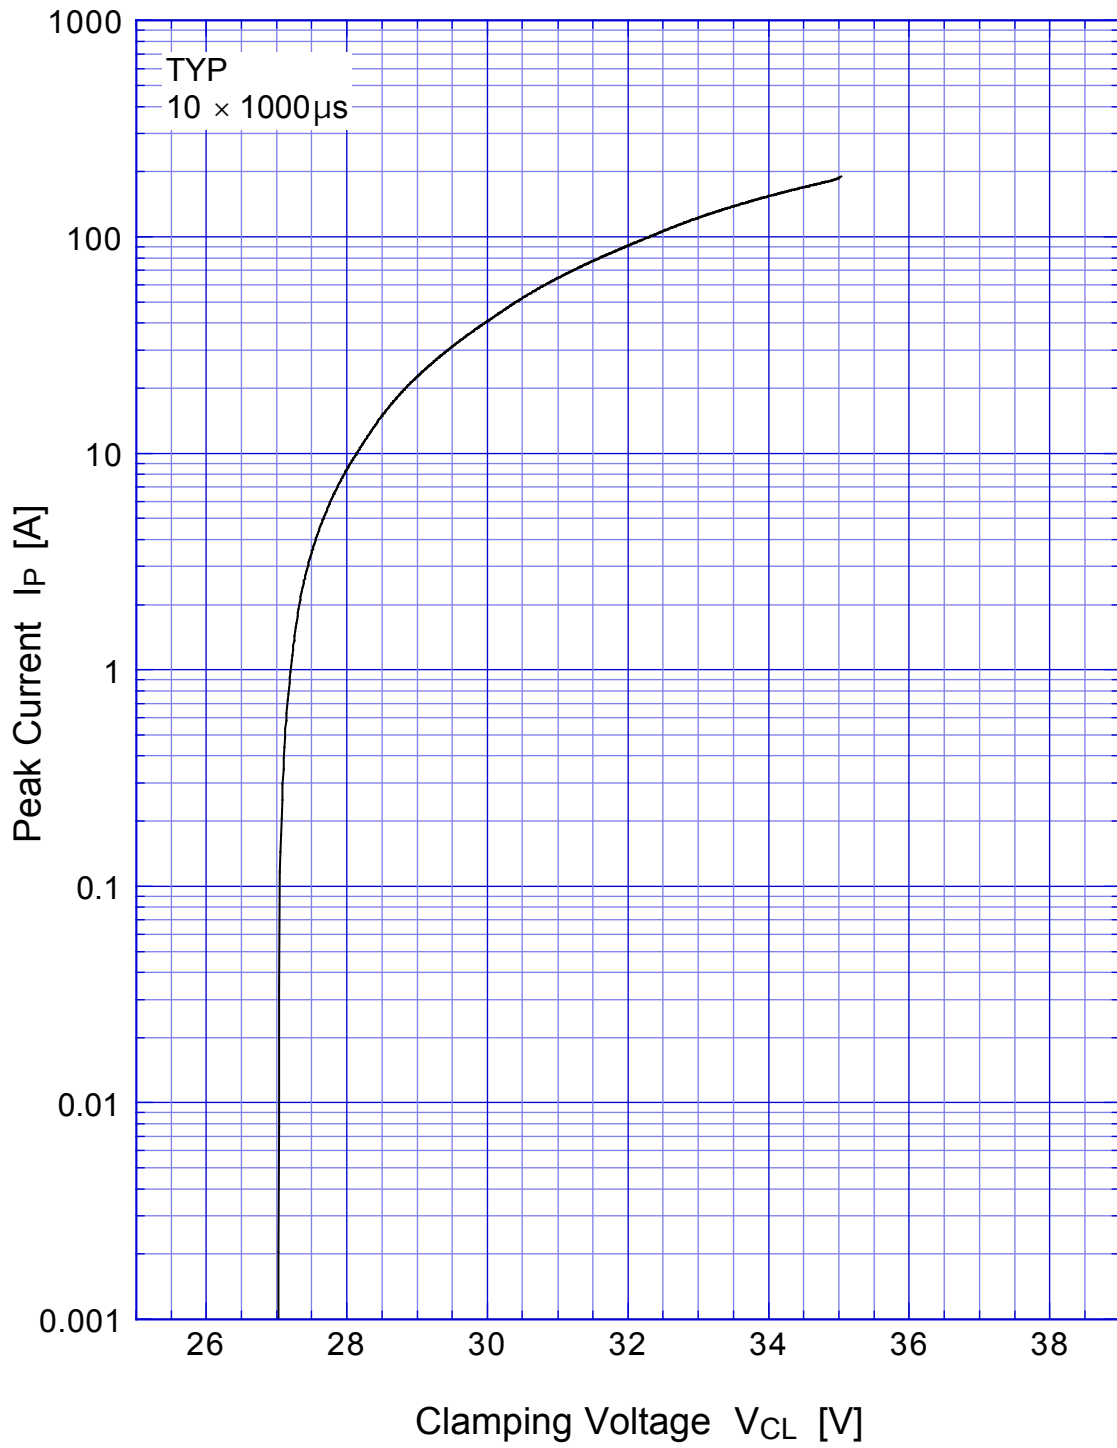


ST70-27F Breakdown Voltage

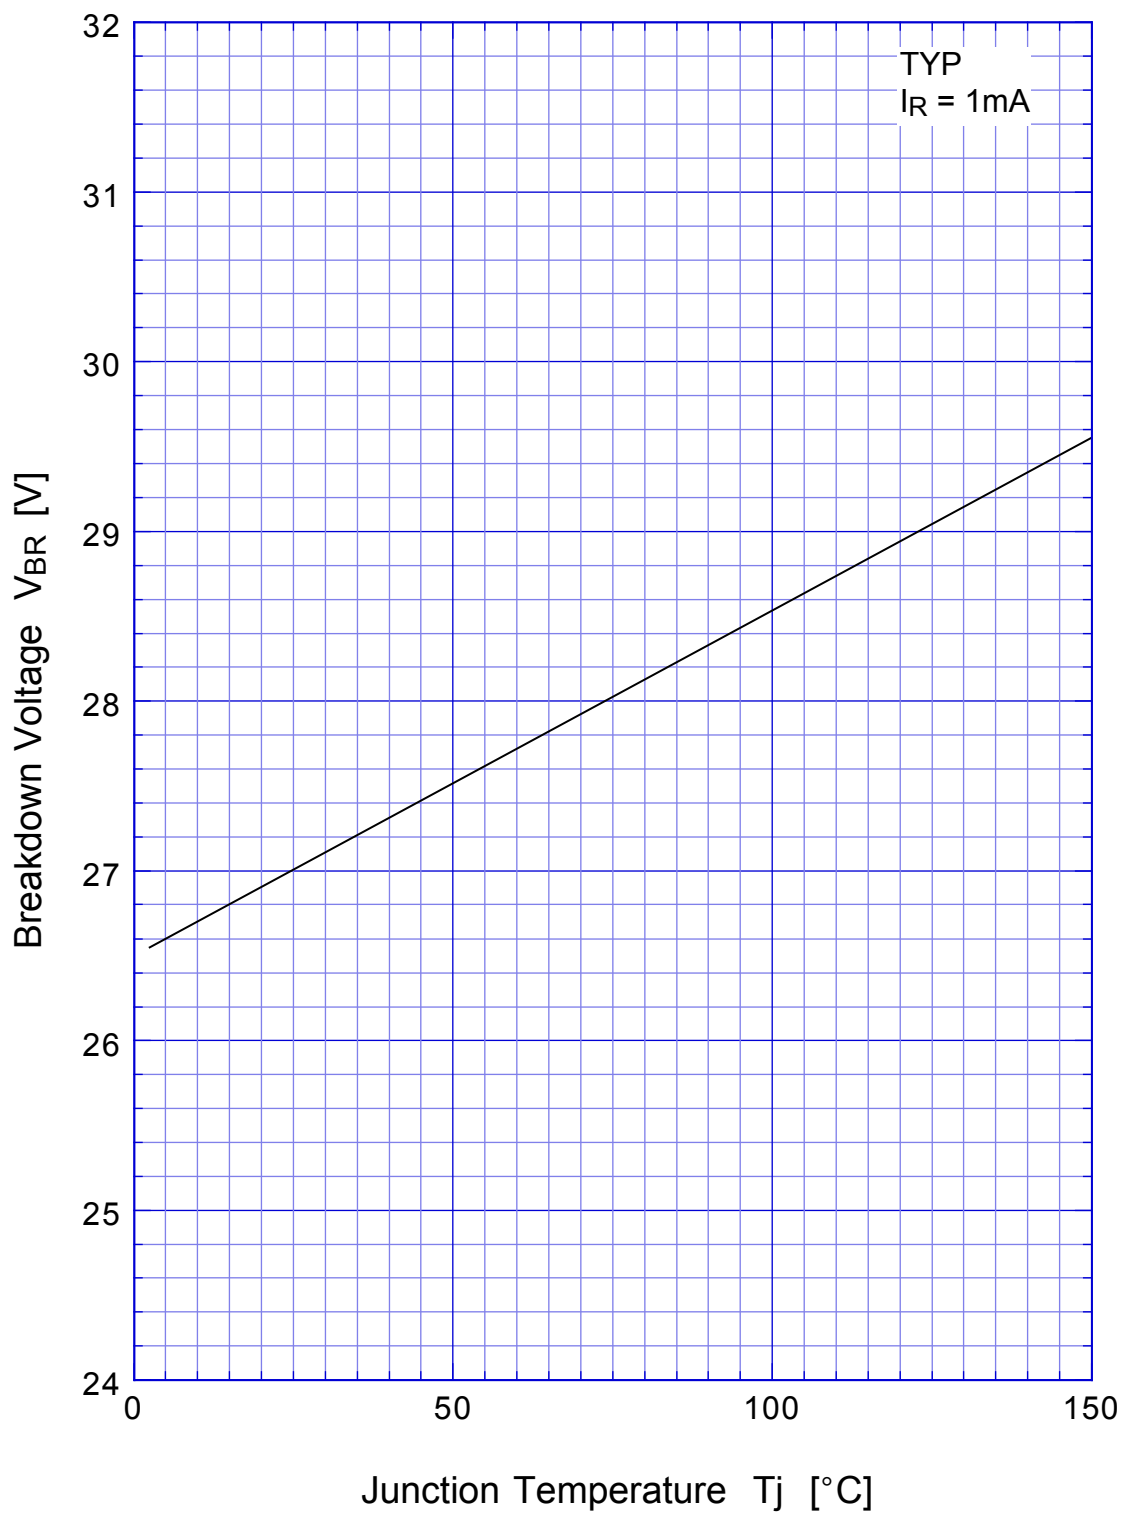


ST70-27F

Reverse Current

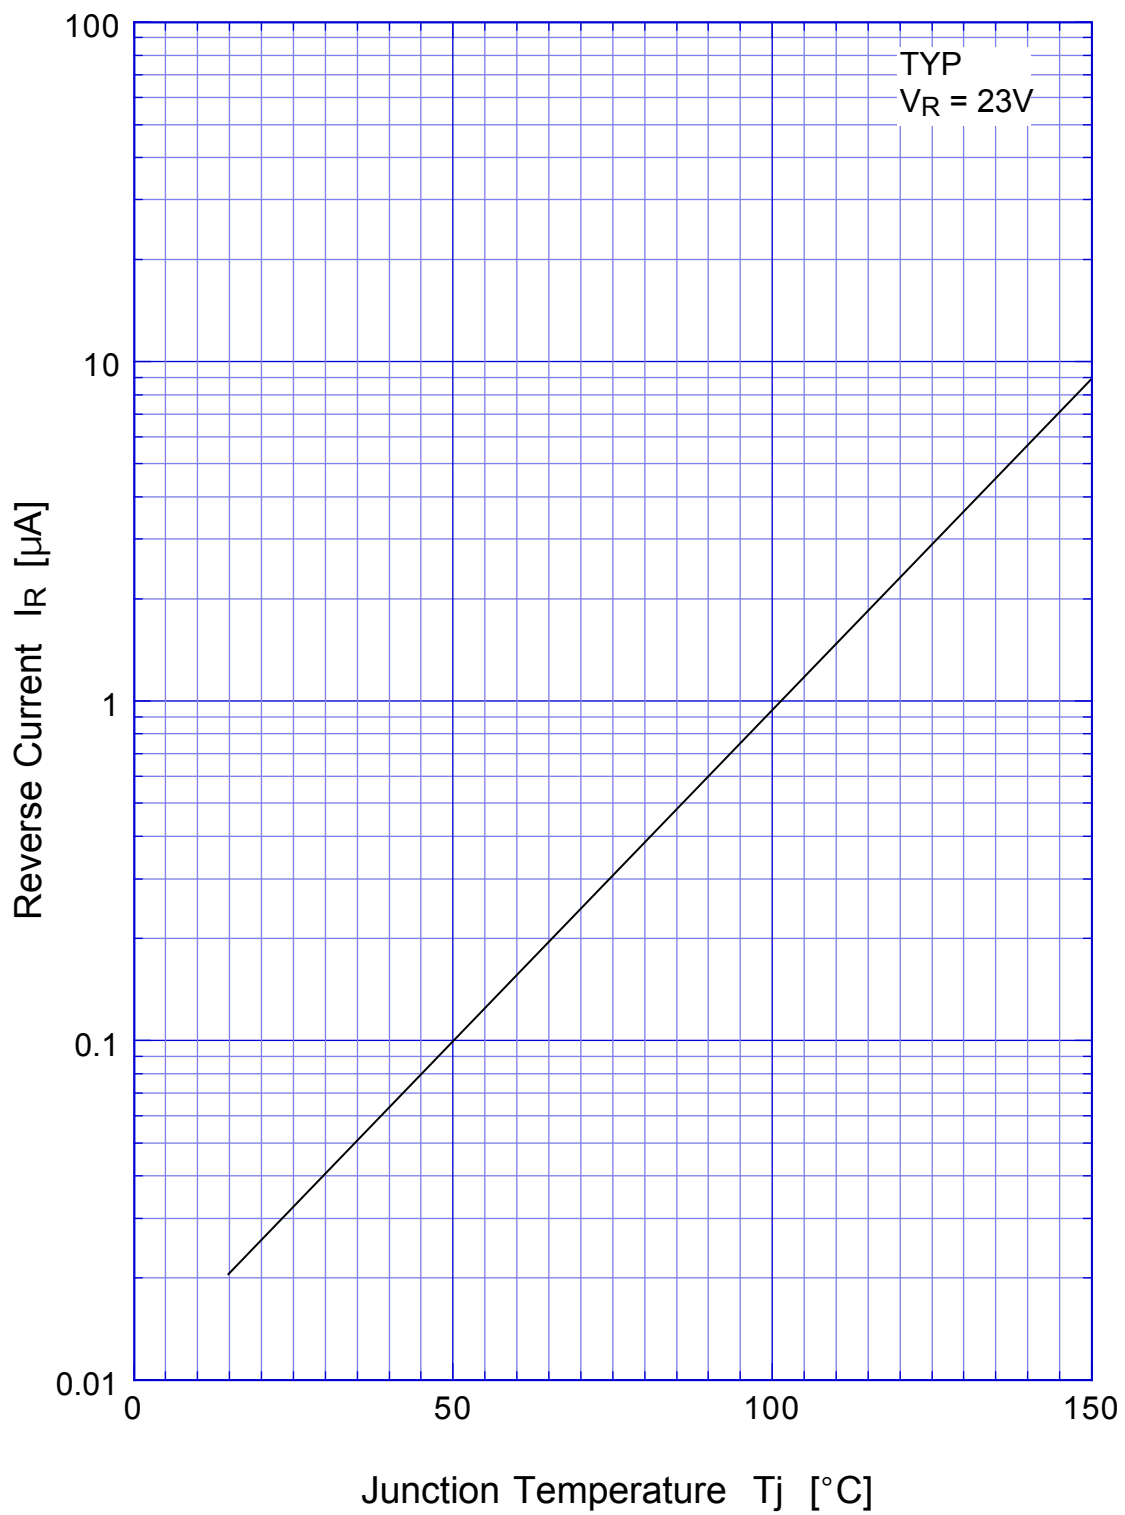


ST70-27F

Peak Surge Reverse Current

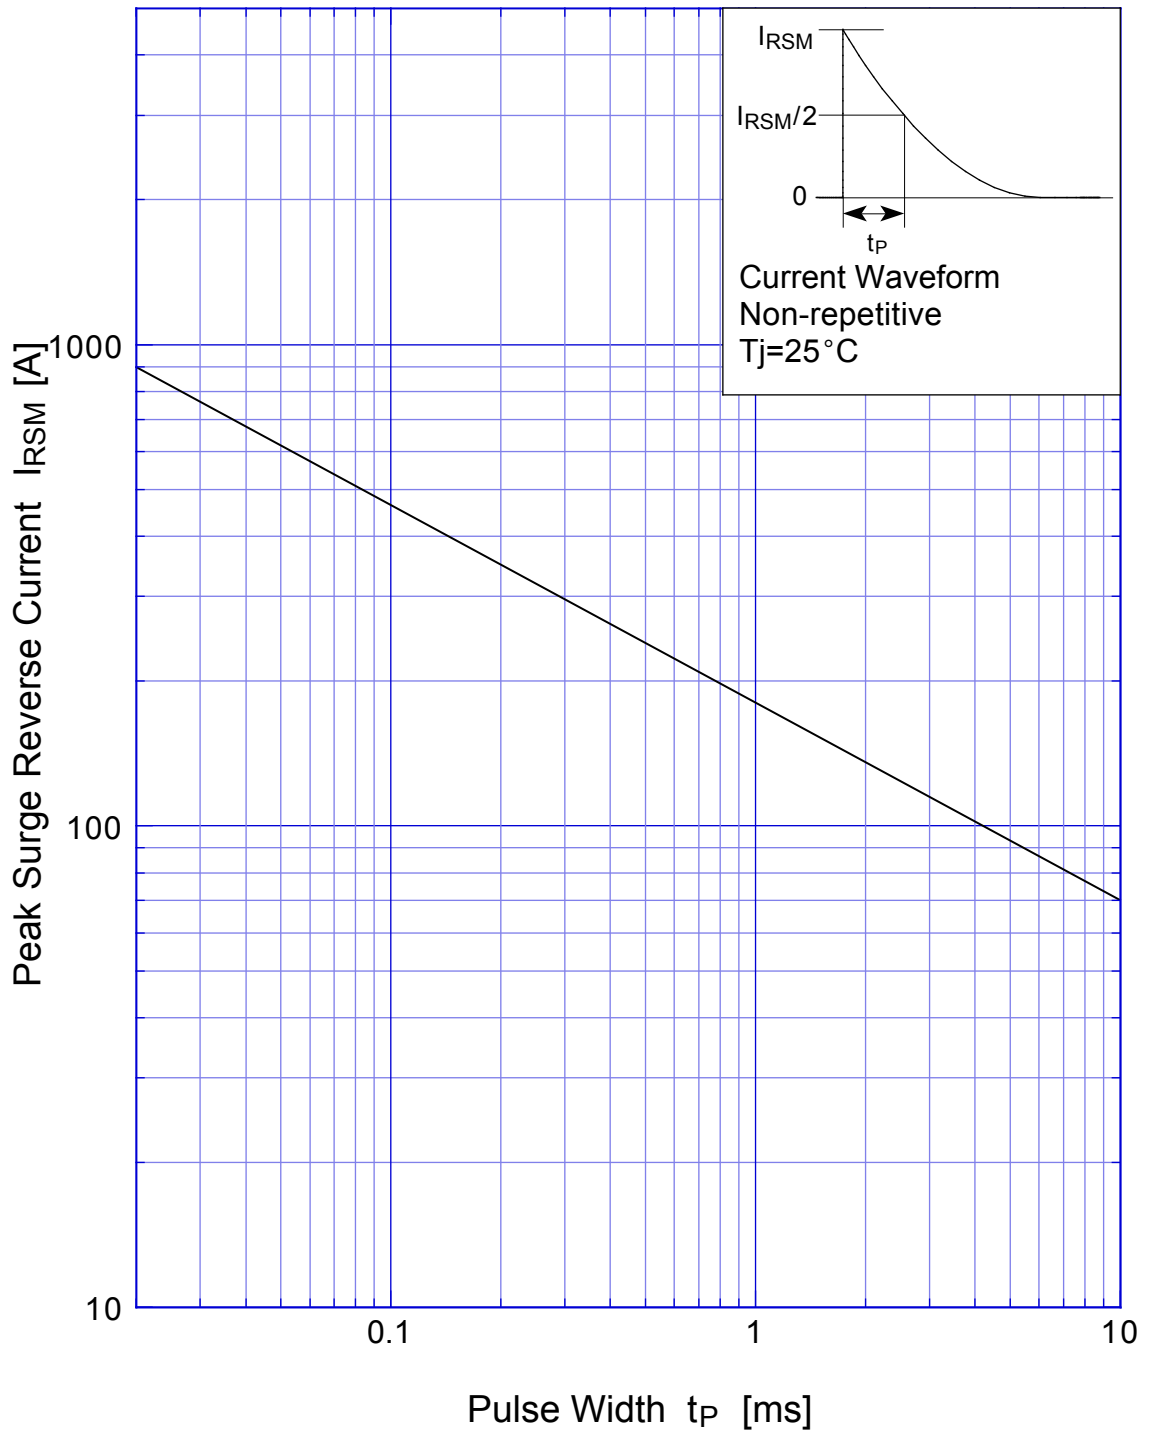


ST70-27F

Junction Capacitance

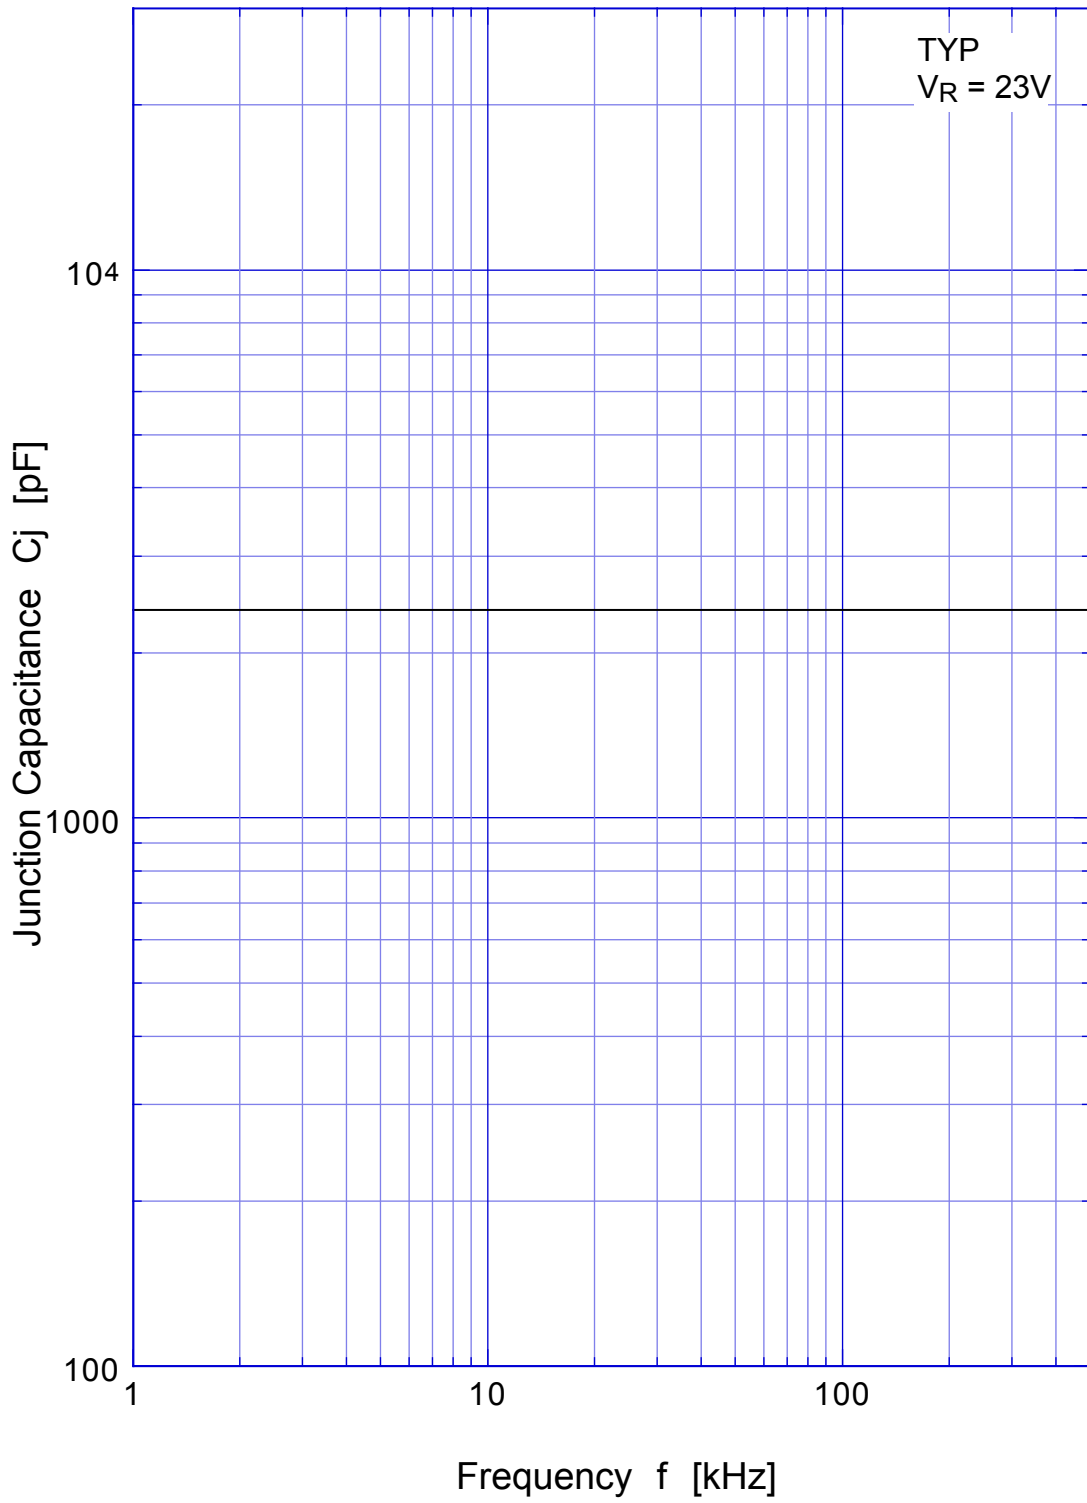


ST70-27F

Junction Capacitance

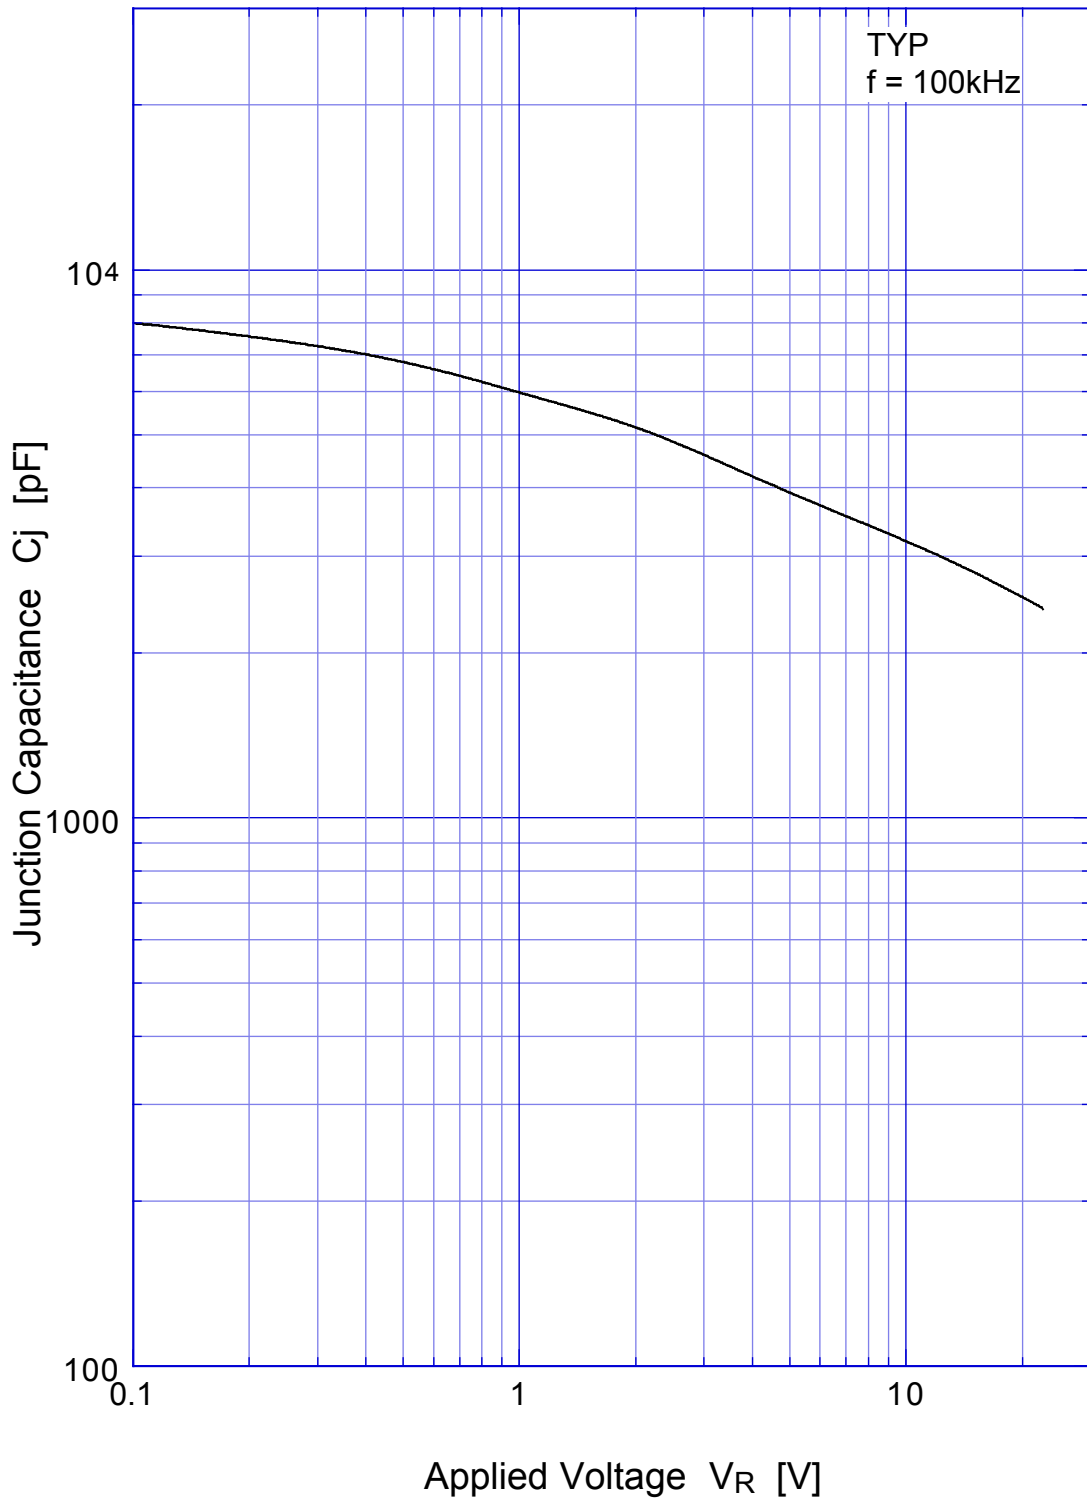


ST70-27F

Derating Curve

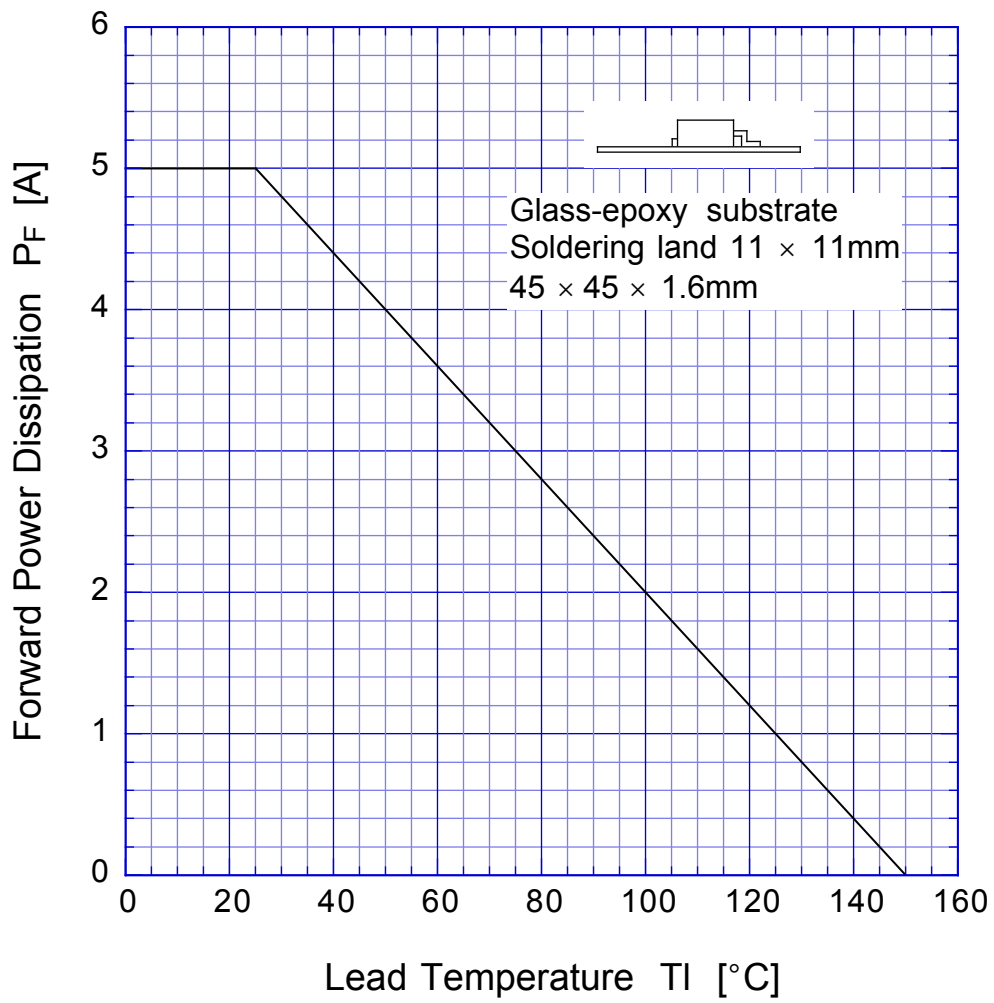


ST70-27F


Derating Curve

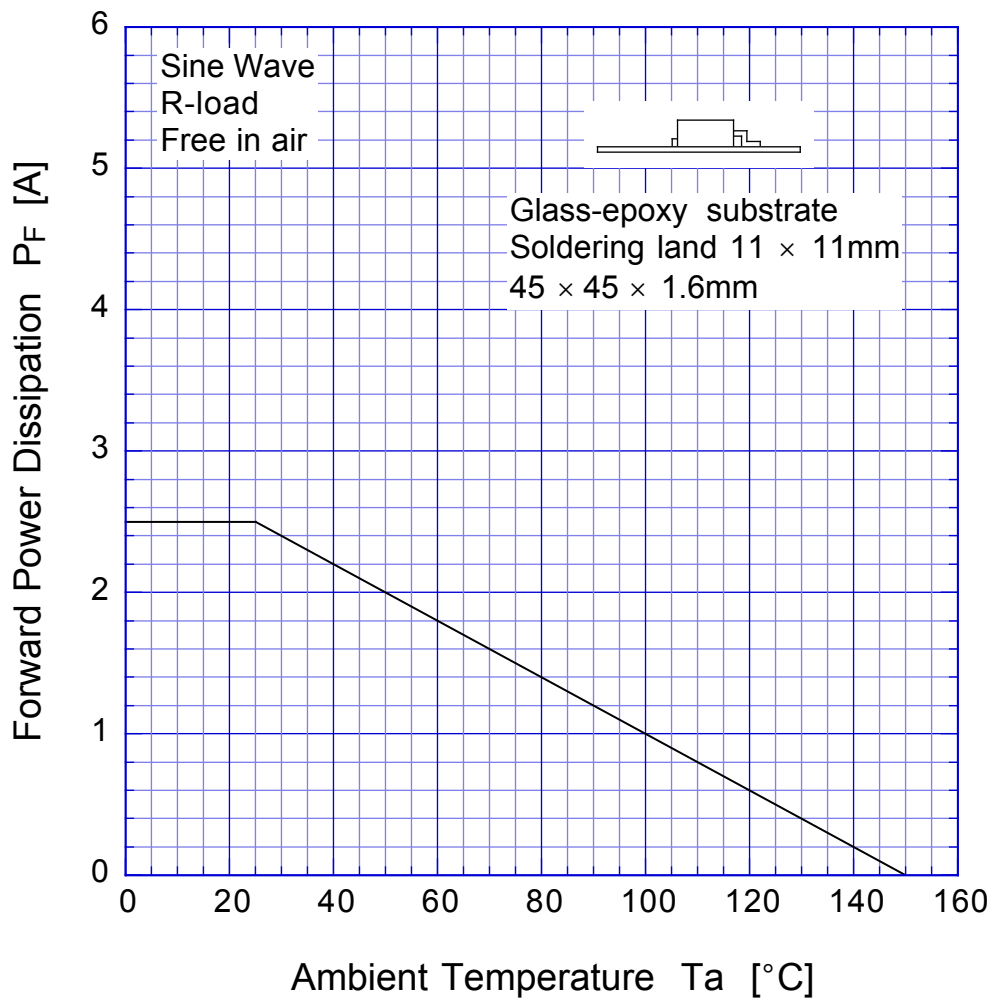

ST70-27F Transient Thermal Impedance

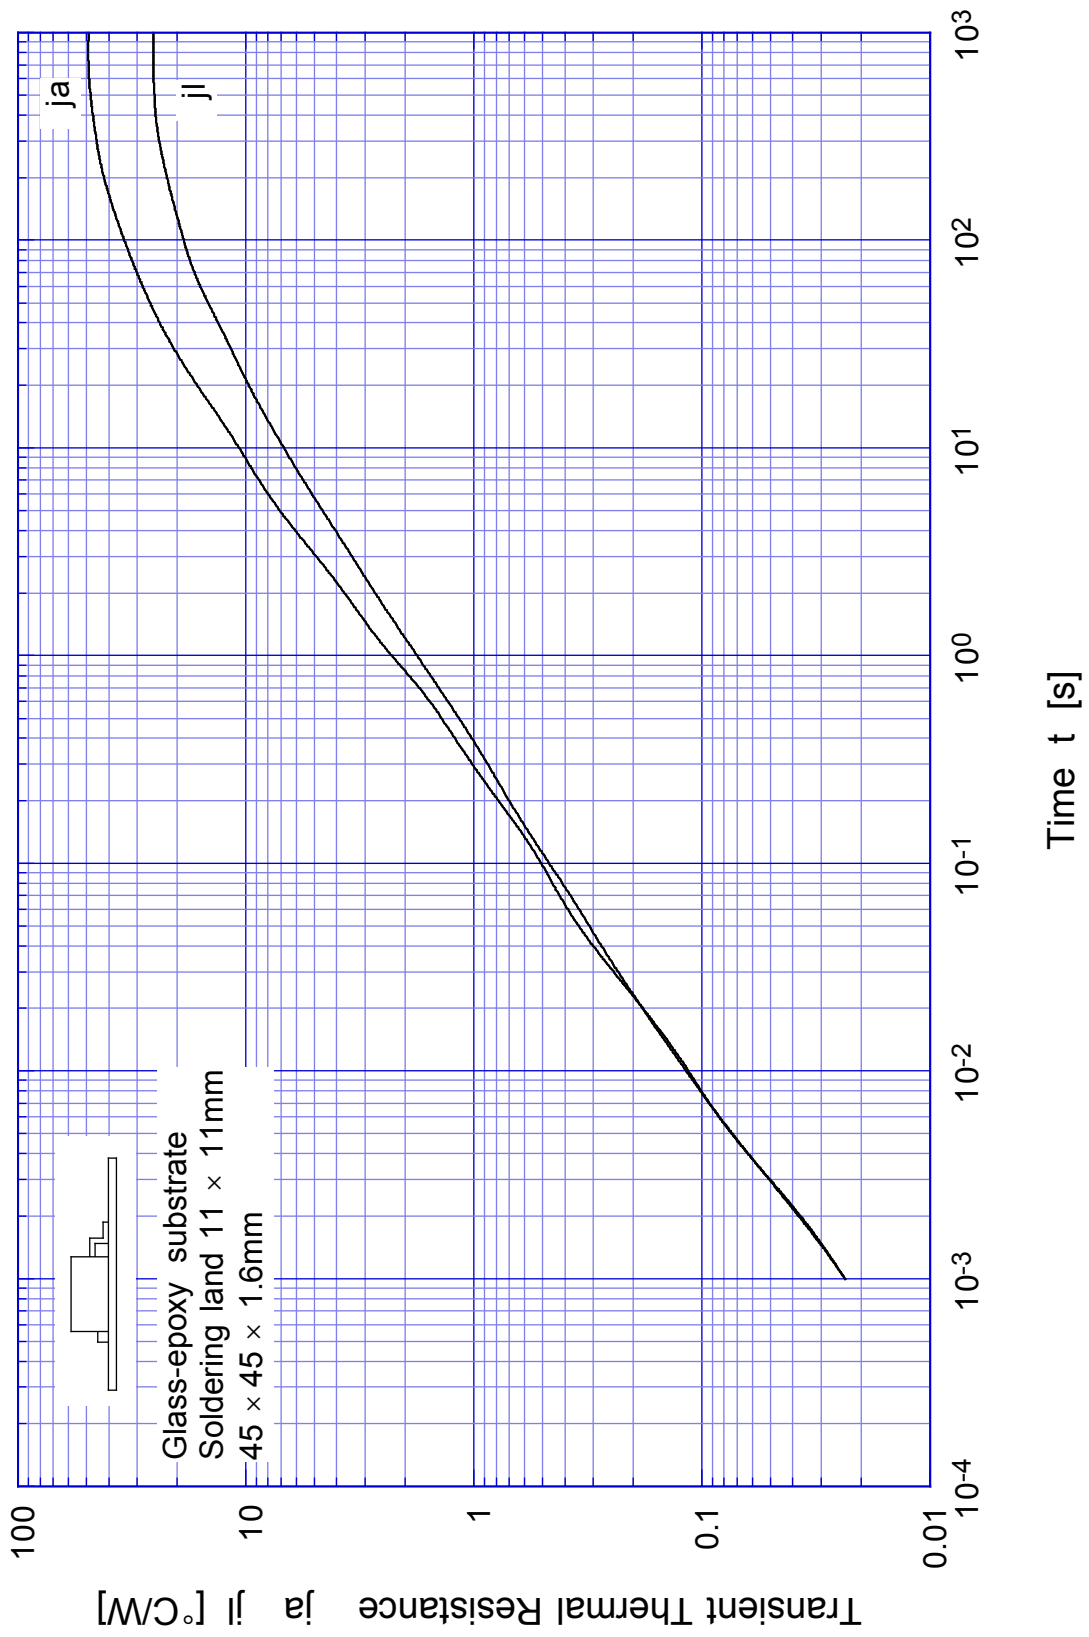

ST70-27F Forward Power Dissipation

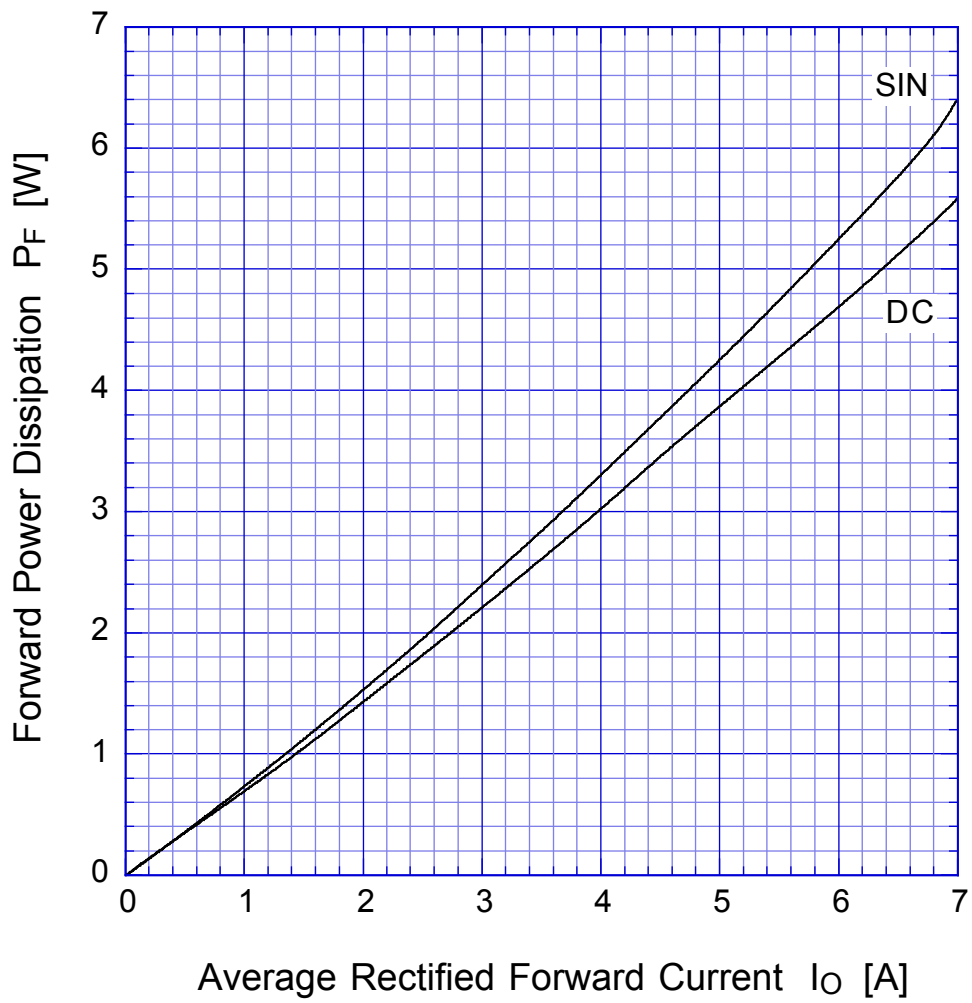

$T_j = 150^\circ\text{C}$