
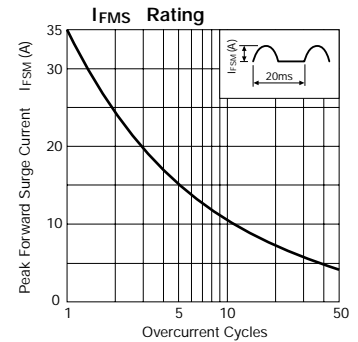
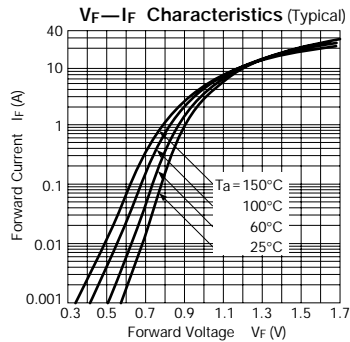





Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings				Electrical Characteristics (Ta = 25°C)				Others						
		V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	R _{th(j-ℓ)} (°C/W)	Mass (g)				
							max	I _F (A)								
AM01Z	200	1.0	35	-40 to +150	0.98	1.0	10	50	22	0.13	Ⓐ					
AM01	400															
AM01A	600															
EM01Z	200	1.0	45		0.97	1.0						20	100	20	0.2	Ⓑ
EM01	400															
EM01A	600															
EM 1Y	100	1.0	45		0.97	1.0	17	0.3	Ⓒ							
EM 1Z	200															
EM 1	400															
EM 1A	600															
EM 1B	800															
EM 1C	1000															




AM01 series

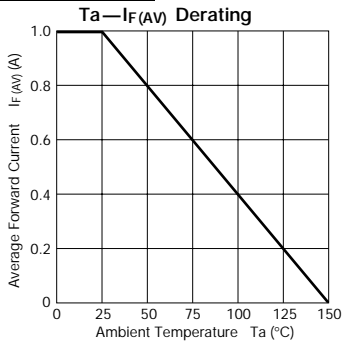

EM01 series

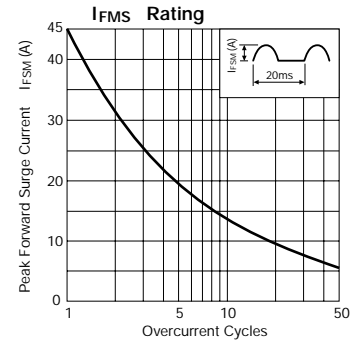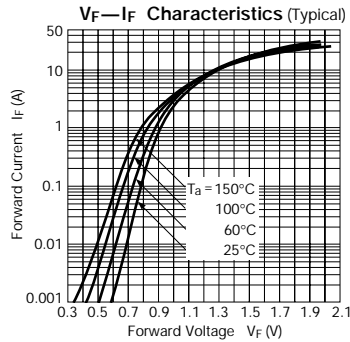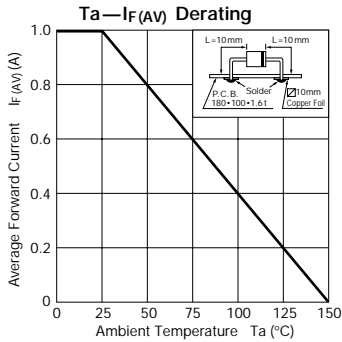

EM 1 series

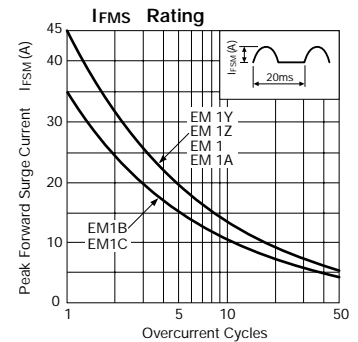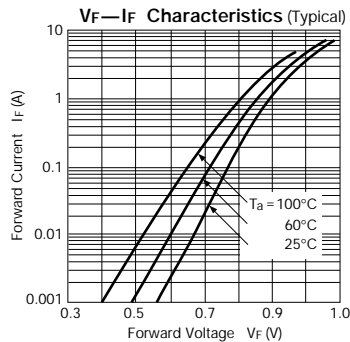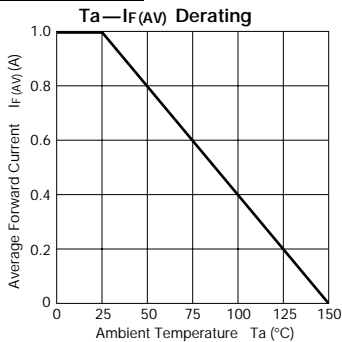

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

