
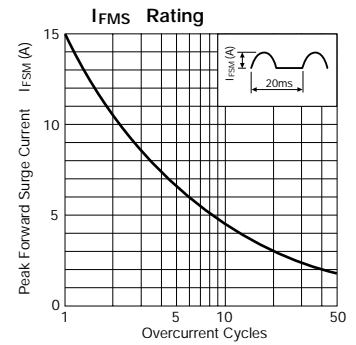






Fast-Recovery Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)						Others													
		V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _{R(H)} (μA)	t _{rr} ① (μs)	t _{rr} ② (μs)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.											
							max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°C max	I _F /I _{RP} (mA)	I _F /I _{RP} (mA)														
EU01Z	200	0.25	15	-40 to +150	1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ											
EU01	400																									
EU01A	600																									
EU02Z	200	1.0	15													1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ
EU02	400																									
EU02A	600																									
EU 1Z	200	0.25	15	1.4	1.0	10	300	0.4	10/10	0.18	10/20	17	0.3	Ⓑ												
EU 1	400																									
EU 1A	600																									




EU01 series



EU02 series

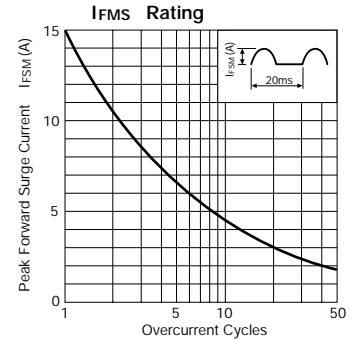

EU 1 series

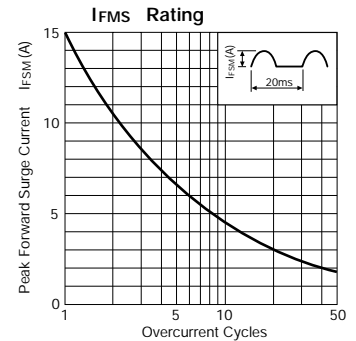

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

