
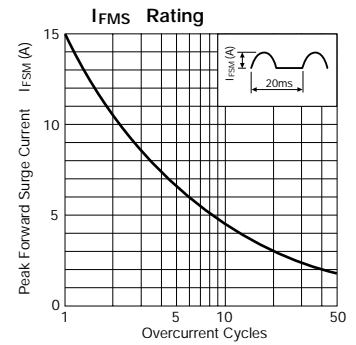






Fast-Recovery Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)						Others													
		VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR(H) (μA)	trr① (μs)	trr② (μs)	Rth(j-ℓ) (°C/W)	Mass (g)	Fig.											
							max	IF (A)								VR=VRM max	VR=VRM Ta=100°C max	IF/IRP (mA)	IF/IRP (mA)							
EU01Z	200	0.25	15	-40 to +150	1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ											
EU01	400																									
EU01A	600																									
EU02Z	200	1.0	15													1.4	1.0	10	300	0.4	10/10	0.18	10/20	20	0.2	Ⓐ
EU02	400																									
EU02A	600																									
EU 1Z	200	0.25	15	1.4	1.0	10	300	0.4	10/10	0.18	10/20	17	0.3	Ⓑ												
EU 1	400																									
EU 1A	600																									




EU01 series



EU02 series

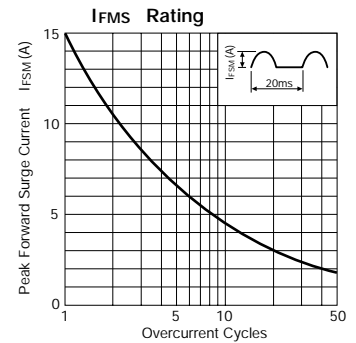

EU 1 series

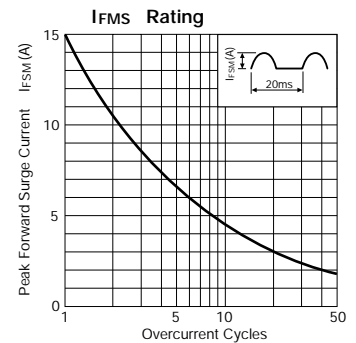

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

