

#### Absolute maximum ratings

( $T_a=25^\circ\text{C}$ )


Symbol	Ratings	Unit
$V_{CBO}$	60±10	V
$V_{CEO}$	60±10	V
$V_{EBO}$	6	V
$I_c$	1.5	A
$I_{CP}$	2.5 (PW≤1ms, Du≤10%)	A
$I_B$	0.1	A
$P_T$	3 ( $T_a=25^\circ\text{C}$ )	W
$T_j$	150	$^\circ\text{C}$
$T_{stg}$	-40 to +150	$^\circ\text{C}$
$\theta_{j-a}$	41.6	$^\circ\text{C}/\text{W}$

#### Electrical characteristics

( $T_a=25^\circ\text{C}$ )


Symbol	Specification			Unit	Conditions
	min	typ	max		
$I_{CBO}$			10	$\mu\text{A}$	$V_{CB}=50\text{V}$
$I_{EBO}$	1.1		3.5	mA	$V_{EB}=6\text{V}$
$V_{CEO}$	50	60	70	V	$I_c=10\text{mA}$
$h_{FE}$	2000	5000	12000		$V_{CE}=4\text{V}, I_c=1\text{A}$
$V_{CE(sat)}$		1.2	1.4	V	$I_c=1\text{A}, I_B=2\text{mA}$
$V_{BE(sat)}$		1.8	2.2	V	
$V_{FEC}$		1.3	1.8	V	$I_{FEC}=1\text{A}$
$t_{on}$		0.5		$\mu\text{s}$	$V_{CC}\doteq 30\text{V},$ $I_c=1\text{A},$ $I_{B1}=-I_{B2}=2\text{mA}$
$t_{stg}$		4.0		$\mu\text{s}$	
$t_f$		1.0		$\mu\text{s}$	
$f_T$		50		MHz	$V_{CE}=12\text{V}, I_E=-0.1\text{A}$
$C_{ob}$		25		pF	$V_{CB}=10\text{V}, f=1\text{MHz}$

#### Equivalent circuit diagram

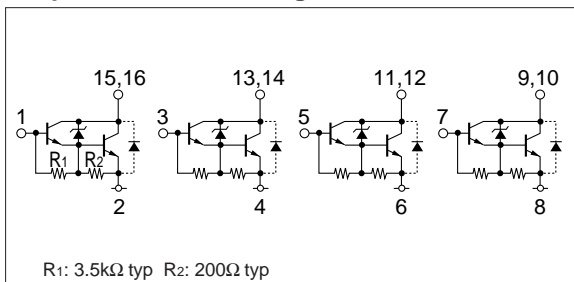


#### Characteristic curves


$I_c$ - $V_{CE}$  Characteristics (Typical)

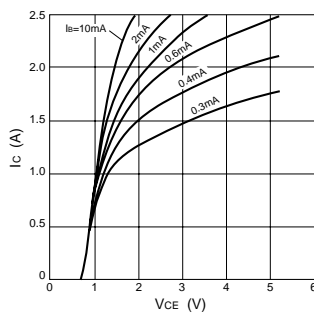


$h_{FE}$ - $I_c$  Characteristics (Typical)

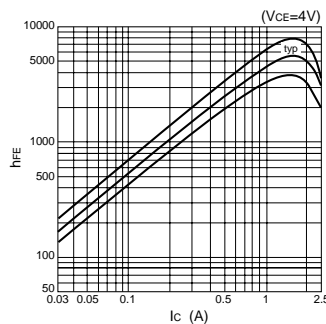


$h_{FE}$ - $I_c$  Temperature Characteristics (Typical)

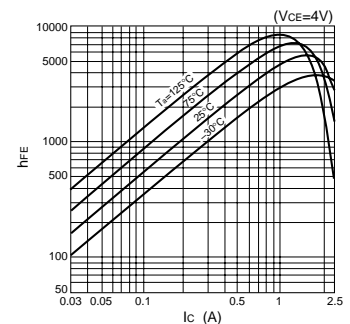


$V_{CE(sat)}$ - $I_c$  Temperature Characteristics (Typical)

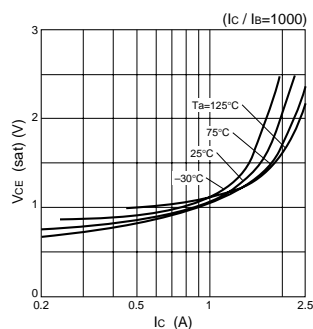


$V_{CE(sat)}$ - $I_B$  Characteristics (Typical)

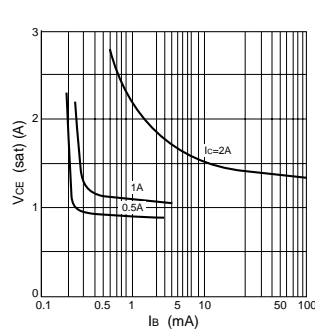


$I_c$ - $V_{BE}$  Temperature Characteristics (Typical)

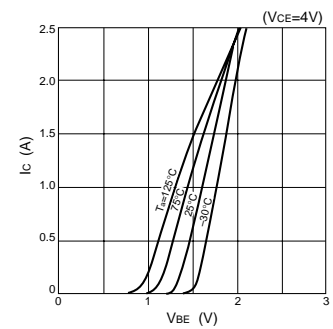

$\theta_{j-a}$ -PW Characteristics

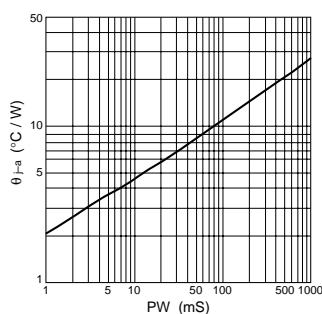

$P_T$ - $T_a$  Characteristics

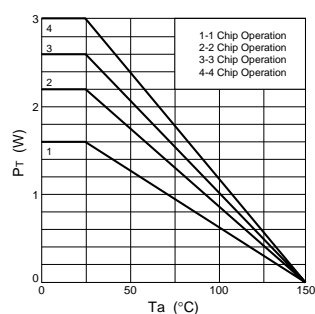

Safe Operating Area (SOA)

