


## Absolute maximum ratings

(Ta=25°C)

Symbol	Ratings	Unit
V <sub>DSS</sub>	150	V
V <sub>GSS</sub>	±20	V
I <sub>D</sub>	±7	A
I <sub>D(pulse)</sub>	±15 (PW≤1ms)	A
EAS*	100	mJ
P <sub>T</sub>	5 (Ta=25°C, with all circuits operating, without heatsink) 35 (Tc=25°C, with all circuits operating, with infinite heatsink)	W
θ <sub>j-a</sub>	25 (Junction-Air, Ta=25°C, with all circuits operating)	°C/W
θ <sub>j-c</sub>	3.57 (Junction-Case, Tc=25°C, with all circuits operating)	°C/W
V <sub>ISO</sub>	1000 (Between fin and lead pin, AC)	Vrms
T <sub>ch</sub>	150	°C
T <sub>stg</sub>	-40 to +150	°C

\* : V<sub>DD</sub>=25V, L=3.5mH, I<sub>D</sub>=7A, unclamped, R<sub>G</sub>=50Ω, see Fig. E on page 15.

## ■ Equivalent circuit diagram

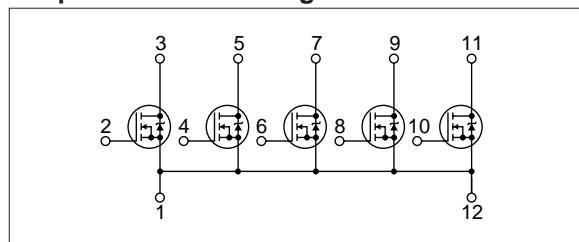


## Electrical characteristics

(Ta=25°C)


Symbol	Specification			Unit	Conditions
	min	typ	max		
V <sub>(BR)DSS</sub>	150			V	I <sub>D</sub> =100μA, V <sub>GS</sub> =0V
I <sub>GSS</sub>			±100	nA	V <sub>GS</sub> =±20V
I <sub>DSS</sub>			100	μA	V <sub>DS</sub> =150V, V <sub>GS</sub> =0V
V <sub>TH</sub>	1.0		2.0	V	V <sub>DS</sub> =10V, I <sub>D</sub> =250μA
R <sub>e(yfs)</sub>	6	8.5		S	V <sub>DS</sub> =10V, I <sub>D</sub> =3.5A
R <sub>Ds(ON)</sub>		150	200	mΩ	V <sub>GS</sub> =10V, I <sub>D</sub> =3.5A
		180	230	mΩ	V <sub>GS</sub> =4V, I <sub>D</sub> =3.5A
C <sub>iss</sub>	930			pF	V <sub>DS</sub> =10V, f=1.0MHz,
C <sub>oss</sub>	230			pF	V <sub>GS</sub> =0V
t <sub>d(on)</sub>	25			ns	I <sub>D</sub> =3.5A,
t <sub>r</sub>	35			ns	V <sub>DD</sub> =70V,
t <sub>d(off)</sub>	70			ns	R <sub>L</sub> =20Ω, V <sub>GS</sub> =5V,
t <sub>f</sub>	30			ns	see Fig. 3 on page 16.
V <sub>SD</sub>		1.1	1.5	V	I <sub>D</sub> =7A, V <sub>GS</sub> =0V
t <sub>rr</sub>		350		ns	I <sub>D</sub> =±100mA

## Characteristic curves


I<sub>D</sub>-V<sub>DS</sub> Characteristics (Typical)

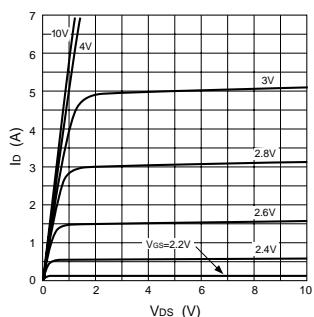


I<sub>D</sub>-V<sub>GS</sub> Characteristics (Typical)

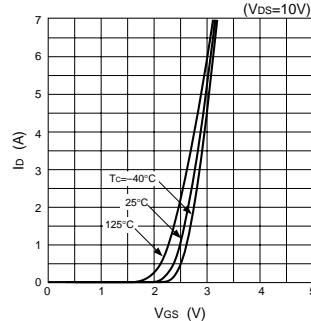


R<sub>Ds(ON)</sub>-I<sub>D</sub> Characteristics (Typical)

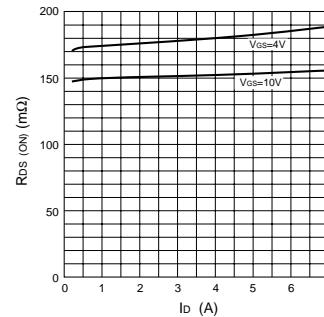


R<sub>e(yfs)</sub>-I<sub>D</sub> Characteristics (Typical)

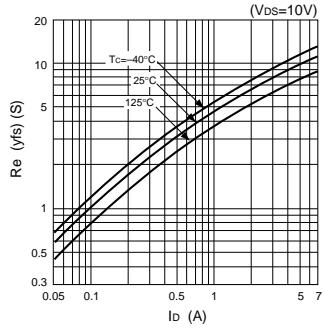


R<sub>Ds(ON)</sub>-T<sub>c</sub> Characteristics (Typical)

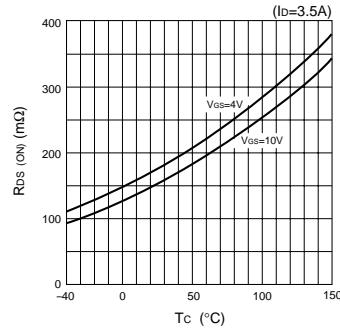


Capacitance-V<sub>DS</sub> Characteristics (Typical)

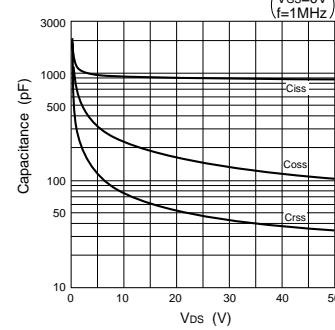

I<sub>DR</sub>-V<sub>SD</sub> Characteristics (Typical)

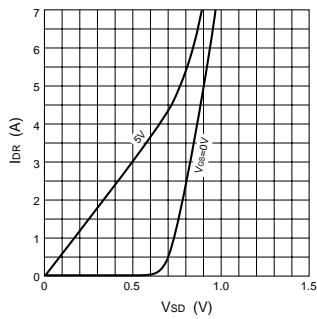

Safe Operating Area (SOA)

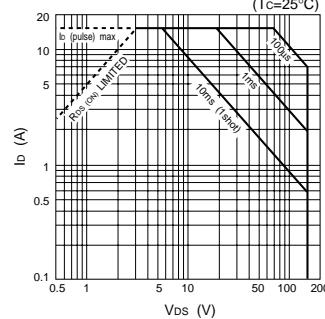

P<sub>T</sub>-T<sub>a</sub> Characteristics

