
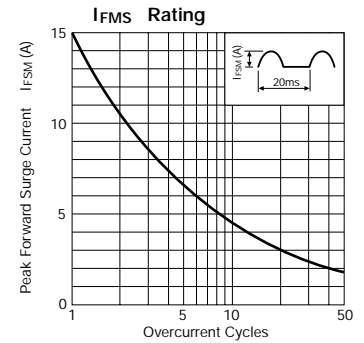
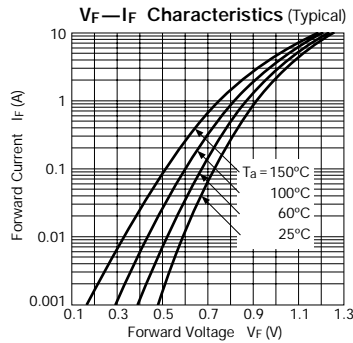





# Fast-Recovery Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)						Others			
		VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	trr (μs)		Rth (j-ℓ)	Mass		
							max	IF (A)	VR=VRM max	VR=VRM Ta=100°C max	IF/IRP (mA)	IF/IRP (mA)	(°C/W)	(g)		
EU 2Z		200	1.0	15	-40 to +150	1.4	1.0	10	300	0.4	10/10	0.18	10/20	17	0.3	Ⓐ
EU 2	400															
EU 2A	600															
EU 2YX		100	1.2	25		0.9	1.2	0.2	0.08	Ⓑ						
RF 1Z		200	0.6	15		2.0	0.6	10	200		0.4	10/10	0.18	10/20	15	
RF 1		400														
RF 1A		600														
RF 1B		800														




## EU 2 series

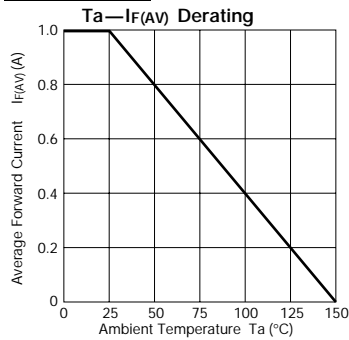

## EU 2YX

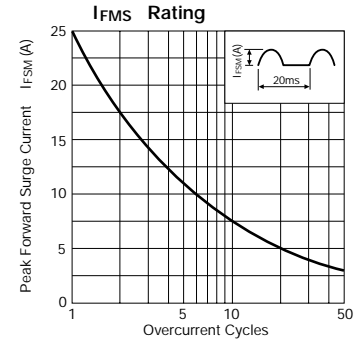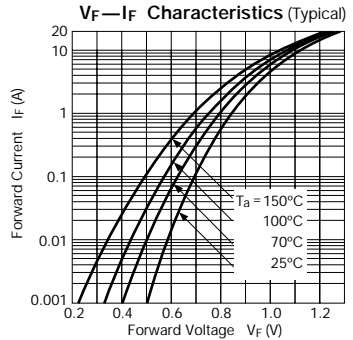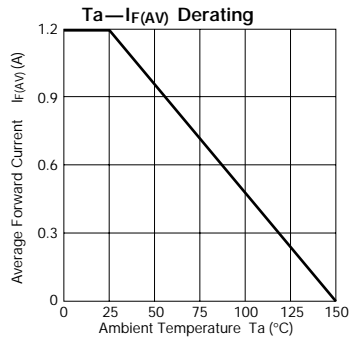

## RF 1 series

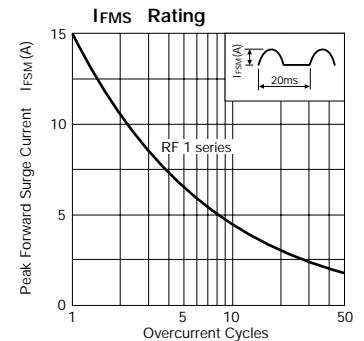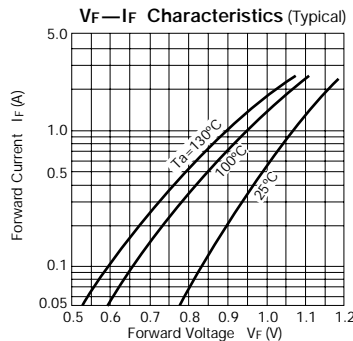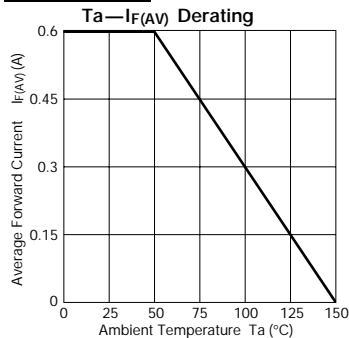

## External Dimensions

(Unit: mm)

Flammability:  
UL94V-0 or Equivalent

