
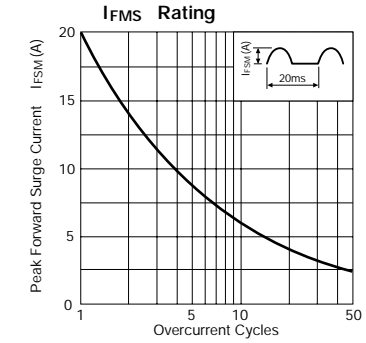
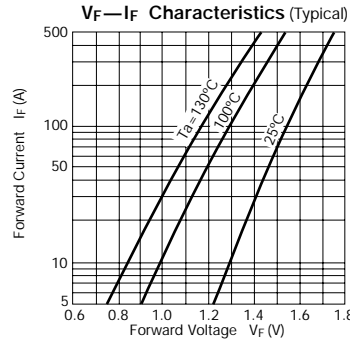





Fast-Recovery Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others	
		V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	t _{rr} ① (μs)	t _{rr} ② (μs)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.
							max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=150°C max	I _F /I _{RP} (mA)	I _F /I _{RP} (mA)			
RC 2	2000	0.2	20	-40 to +150	2.0	0.2	10	300	4.0	10/10	1.3	10/20	15	0.4	Ⓐ
EH 1Z	200	0.6	30		1.35	0.6	10	200	4.0	10/10	1.3	10/20	20	0.3	Ⓑ
EH 1	400				1.3	0.6	5	70	4.0	10/10	1.3	10/20	15	0.4	Ⓐ
EH 1A	600														
RH 1Z	200	0.6	35		1.3	0.6	5	70	4.0	10/10	1.3	10/20	15	0.4	Ⓐ
RH 1	400														
RH 1A	600														
RH 1B	800														
RH 1C	1000														




RC 2 series

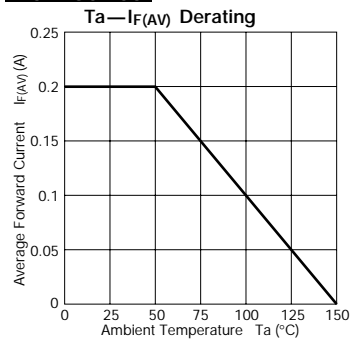

EH 1 series

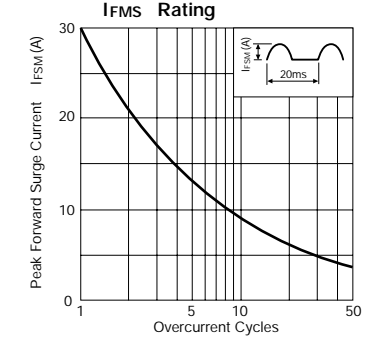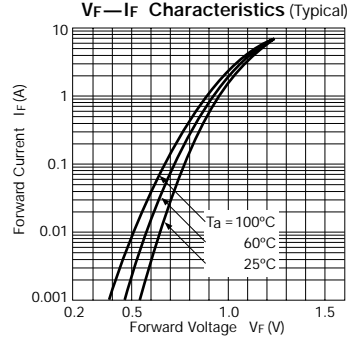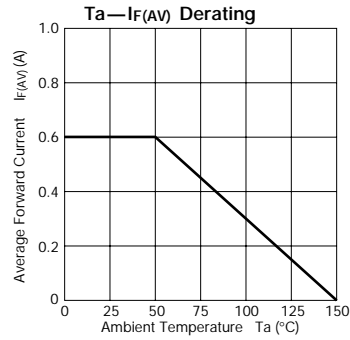

RH 1 series

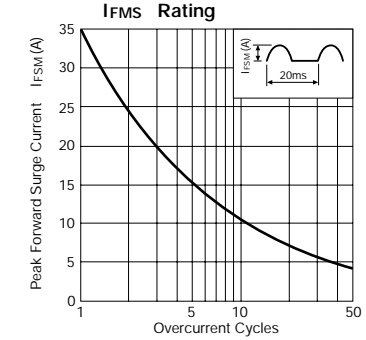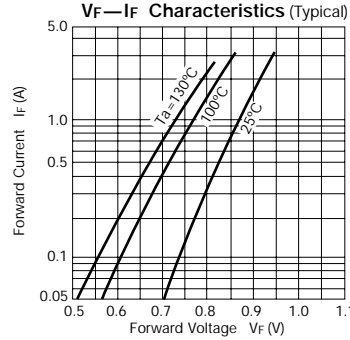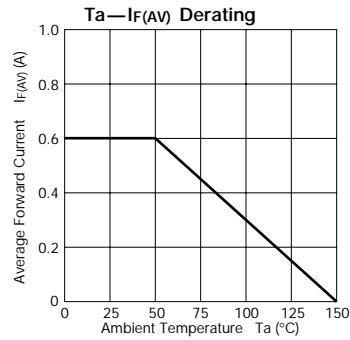

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

