
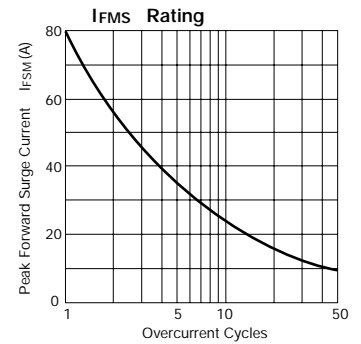






Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)				Others		
		V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)	I _R (μA)	I _{R(H)} (μA)	R _{th(j-ℓ)} (°C/W)	Mass (g)	Fig.	
				50Hz Half-cycle Sinewave Single Shot			max	I _F (A)	V _R =V _{RM} max				V _R =V _{RM} Ta=100°C max
EM 2	400	1.2	80	-40 to +150	0.92	1.2	10	50	17	0.3	Ⓐ		
EM 2A	600												
EM 2B	800												
RM 1Z	200	1.0	50		0.95	1.0	5	50	15	0.4		Ⓑ	
RM 1	400												
RM 1A	600												
RM 1B	800	0.8	40		1.2	1.5	10	50	15	0.4			Ⓑ
RM 1C	1000												
RM 11A	600												
RM 11B	800	1.2	100		0.92	1.5	10	50	15	0.4			
RM 11C	1000												




EM 2 series



RM 1 series

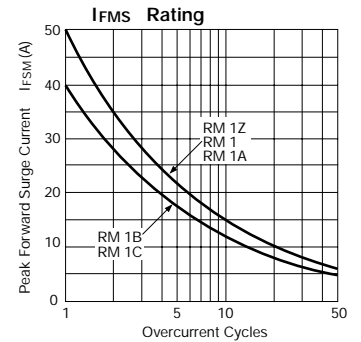

RM 11 series

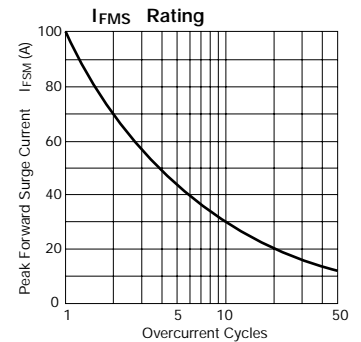

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

