
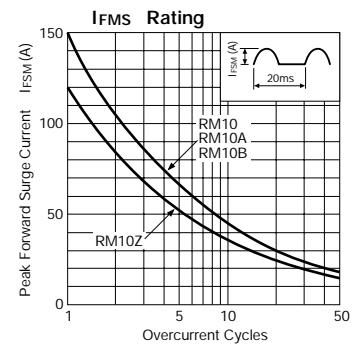






Rectifier Diodes

Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)					Others	
		VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	TJ (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA) VR=VRM Ta=100°C max	Rth (j-ℓ) (°C/W)	Mass (g)	Fig.
							max	IF (A)					
RM 10Z	200	1.5	120	-40 to +150	0.91	1.5	10	50	15	0.4	Ⓐ		
RM 10	400												
RM 10A	600												
RM 10B	800												
RM 2Z	200	1.2	100	-40 to +150	0.91	1.5	10	50	12	0.6	Ⓑ		
RM 2	400												
RM 2A	600												
RM 2B	800												
RM 2C	1000	1.2	80	-40 to +150	0.92	1.5	10	50	12	0.61	Ⓑ		
RO 2Z	200												
RO 2	400												
RO 2A	600												
RO 2B	800												
RO 2C	1000												




RM 10 series

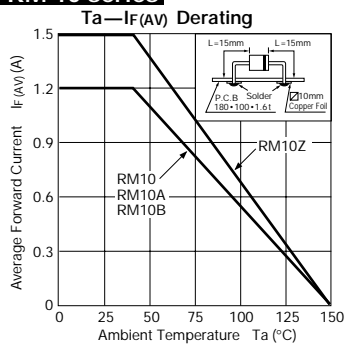

RM 2 series

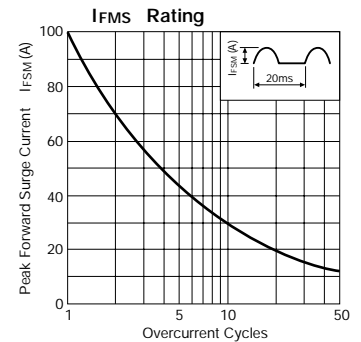

RO 2 series

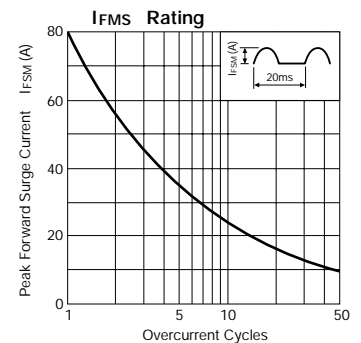

External Dimensions (Unit: mm)

Flammability:
UL94V-0 or Equivalent

