



TF821M, TF841M, TF861M


$V_T - I_T$ Characteristics (max)

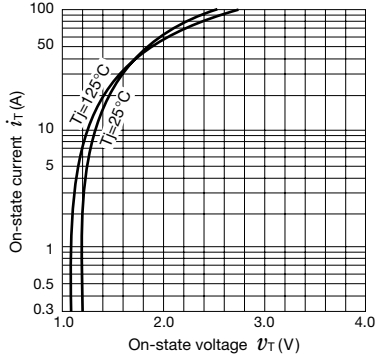


I_{rsm} Ratings

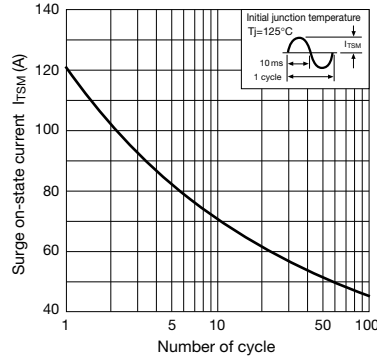


Gate Characteristics

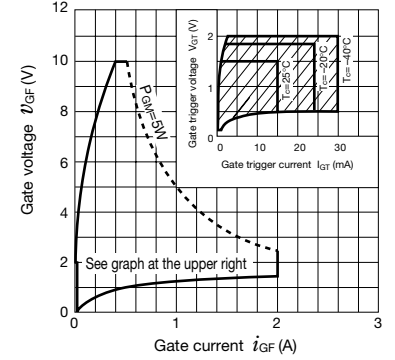


$I_T(AV) - P_T(AV)$ Characteristics

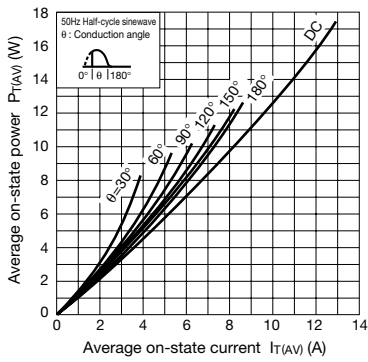


$I_T(AV) - T_c$ Ratings

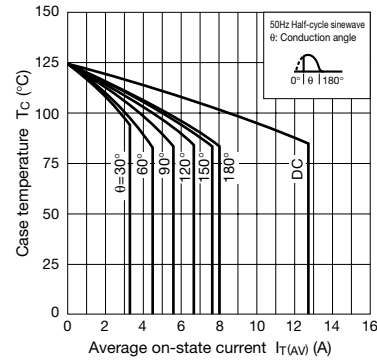


Pulse trigger temperature Characteristics V_{gt} (Typical)

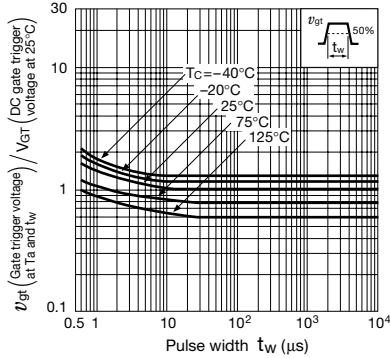


Pulse trigger temperature Characteristics I_{gt} (Typical)

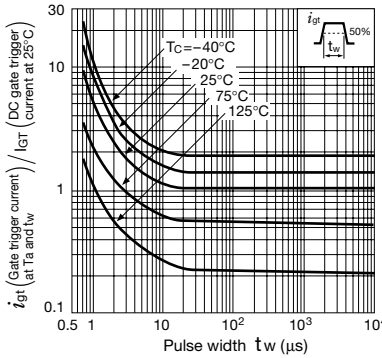


I_H temperature Characteristics (Typical)

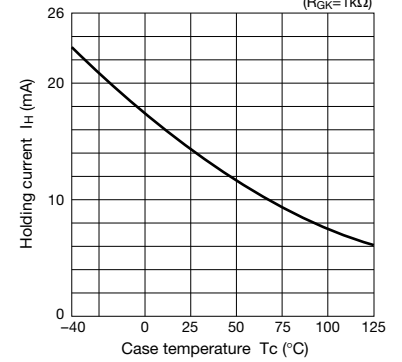

V_{GT} temperature Characteristics (Typical)

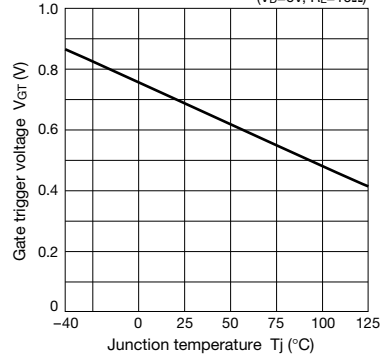

I_{GT} temperature Characteristics (Typical)

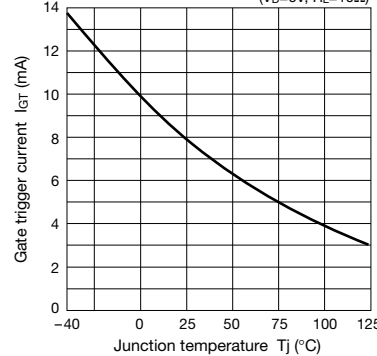

Transient thermal resistance Characteristics (Junction to case)

