


# TO-220F 5A Triac

## TM541S-R, TM561S-R

### ■ Features

- Repetitive peak off-state voltage:  $V_{DRM}=400, 600V$
- RMS on-state current:  $I_{T(RMS)}=5A$
- Gate trigger current:  $I_{GT}=12mA$  max (MODE I, II, III)
- Isolation voltage:  $V_{ISO}=1500V$  (50Hz Sine wave, RMS)
- For resistive load
- UL approved type available

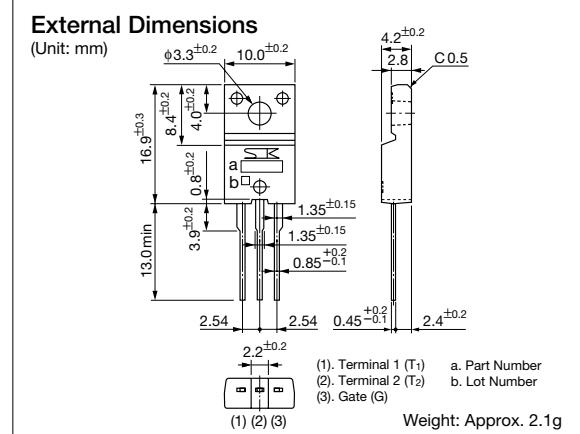

### ■ Absolute Maximum Ratings

Parameter	Symbol	Ratings		Unit	Conditions
		TM541S-R	TM561S-R		
Repetitive peak off-state voltage	$V_{DRM}$	400	600	V	
RMS on-state current	$I_{T(RMS)}$	5.0		A	Conduction angle 360°, $T_c=104^\circ C$
Surge on-state current	$I_{TSM}$	50		A	50Hz full-cycle sinewave, Peak value, Non-repetitive, $T_j=125^\circ C$
Peak gate voltage	$V_{GM}$	—		V	
Peak gate current	$I_{GM}$	1		A	
Peak gate power loss	$P_{GM}$	5		W	
Average gate power loss	$P_{G(AV)}$	0.5		W	
Junction temperature	$T_j$	-40 to +125		°C	
Storage temperature	$T_{STG}$	-40 to +125		°C	
Isolation voltage	$V_{ISO}$	1500		Vrms	50Hz Sine wave, RMS, Terminal to Case, 1 min.

### ■ Electrical Characteristics

Parameter	Symbol	Ratings			Unit	Conditions
		min	typ	max		
Off-state current	$I_{DRM}$			2.0	mA	$V_D=V_{DRM}, R_{GK}=\infty, T_j=125^\circ C$
				0.1		$V_D=V_{DRM}, R_{GK}=\infty, T_j=25^\circ C$
On-state voltage	$V_{TM}$			1.6	V	Pulse test, $I_{TM}=7A$
Gate trigger voltage	$V_{GT}$	I	1.3	1.8	V	$V_D=6V, R_L=10\Omega, T_C=25^\circ C$
		II	0.7	1.2		
		III	0.8	1.2		
		IV	3.1			
Gate trigger current	$I_{GT}$	I	8	12	mA	$V_D=6V, R_L=10\Omega, T_C=25^\circ C$
		II	8.5	12		
		III	9	12		
		IV	70			
Gate non-trigger voltage	$V_{GD}$	0.1			V	$V_D=1/2 \times V_{DRM}, T_j=125^\circ C$
Holding current	$I_H$		14		mA	$V_D=6V$
Thermal resistance	$R_{th}$			4.0	°C/W	Junction to case