
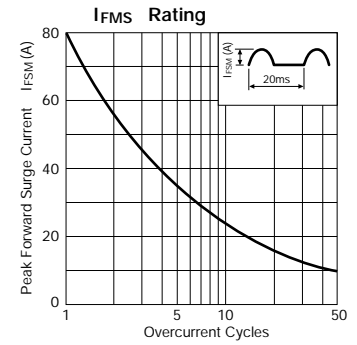






Ultra-Fast-Recovery Rectifier Diodes

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others		
	V _{RM} (V)	I _{F(AV)} (A)	I _{FSM} (A) 50Hz Half-cycle Sinewave Single Shot	T _J (°C)	T _{stg} (°C)	V _F (V)		I _R (μA)	I _R (H) (μA)	t _{rr} ① (ns)	t _{rr} ② (ns)		R _{th(j-c)} (°C/W)	Mass (g)	Fig.
						max	I _F (A)	V _R =V _{RM} max	V _R =V _{RM} Ta=100°C max	I _F /I _{RP} (mA)	I _F /I _{RP} (mA)				
RL 4Z	200	3.5	80	-40 to +150		0.95	3.5	150	500	50	100/100	35	8	1.2	Ⓐ
RL 4A	600	3.0				1.5	3.0	50	100 (T _J =150°C)		500/500				
RX 3Z	200					0.98				10	30	100/100	25	100/200	10



RL 4Z



RL 4A

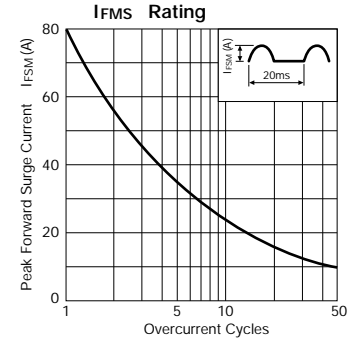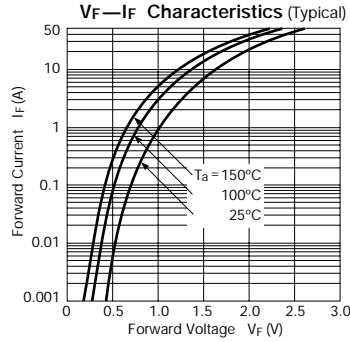

RX 3Z

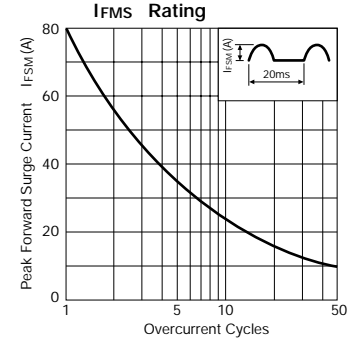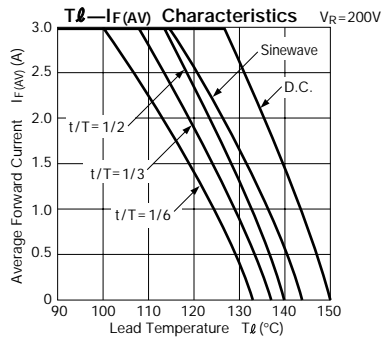

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

