

# THYRISTOR MODULE PWB200AA

TOP





PWB200AA is a Thyristor module suitable for low voltage, 3 phase rectifier applications.

- $I_{T(AV)}$  200A (each device)
- high Surge Current 6000 A (60Hz)
- Easy Construction
- Non-isolated. Mounting base as common Anode terminal

## (Applications)

Welding power Supply  
Various DC power Supply

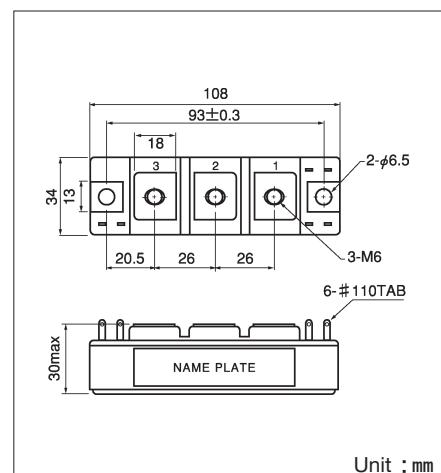

## ■ Maximum Ratings

Symbol	Item	Ratings		Unit
		PWB200AA30	PWB200AA40	
$V_{RRM}$	Repetitive Peak Reverse Voltage	300	400	V
$V_{RSM}$	Non-Repetitive Peak Reverse Voltage	360	480	V
$V_{DRM}$	Repetitive Peak Off-State Voltage	300	400	V

Symbol	Item	Conditions	Ratings	Unit
$I_{T(AV)}$	Average On-State Current	Single phase, half wave, 180° conduction, $T_c : 121^\circ C$	200	A
$I_{T(RMS)}$	R.M.S. On-State Current	Single phase, half wave, 180° conduction, $T_c : 121^\circ C$	314	A
$I_{TSM}$	Surge On-State Current	1/2 cycle, 50Hz/60Hz, peak value, non-repetitive	5400/6000	A
$I^2t$	$I^2t$		1499400	$A^2S$
$P_{GM}$	Peak Gate Power Dissipation		10	W
$P_{G(AV)}$	Average Gate Power Dissipation		1	W
$I_{FGM}$	Peak Gate Current		3	A
$V_{FGM}$	Peak Gate Voltage (Forward)		10	V
$V_{RGM}$	Peak Gate Voltage (Reverse)		5	V
$di/dt$	Critical Rate of Rise of On-State Current	$I_G = 200mA, T_j = 25^\circ C, V_D = 1/2 V_{DRM}, dI_G/dt = 1A/\mu s$	50	$A/\mu s$
$T_j$	Operating Junction Temperature		-40 ~ +150	°C
$T_{stg}$	Storage Temperature		-40 ~ +125	°C
$T_{stg}$	Mounting torque	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	$N \cdot m$ (kgf·cm)
	Terminal (M6)	Recommended Value 2.5~3.9 (25~40)	4.7 (48)	
Mass			280	g

## ■ Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
$I_{DRM}$	Repetitive Peak Off-State Current, max.	at $V_{DRM}$ , Single phase, half wave, $T_j = 150^\circ C$	60	mA
$I_{RRM}$	Repetitive Peak Reverse Current, max.	at $V_{DRM}$ , Single phase, half wave, $T_j = 150^\circ C$	60	mA
$V_{TM}$	Peak On-State Voltage, max.	On-State Current 630A, $T_j = 25^\circ C$ Inst. measurement	1.20	V
$I_{GT}$	Gate Trigger Current, max.	$T_j = 25^\circ C, I_T = 1A, V_D = 6V$	150	mA
$V_{GT}$	Gate Trigger Voltage, max.	$T_j = 25^\circ C, I_T = 1A, V_D = 6V$	2	V
$V_{GD}$	Non-Trigger Gate, Voltage. min.	$T_j = 150^\circ C, V_D = 1/2 V_{DRM}$	0.25	V
$tgt$	Turn On Time, max.	$I_T = 200A, I_G = 200mA, T_j = 25^\circ C, V_D = 1/2 V_{DRM}, dI_G/dt = 1A/\mu s$	10	$\mu s$
$dv/dt$	Critical Rate of Rise of Off-State Voltage, min.	$T_j = 150^\circ C, V_D = 2/3 V_{DRM}$ , Exponential wave.	200	$V/\mu s$
$I_H$	Holding Current, typ.	$T_j = 25^\circ C$	70	mA
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case (1/3Module)	0.12	$^\circ C/W$

