

# TRANSISTOR MODULE (Hi-β)

## SQD300BA60





UL;E76102 (M)

SQD300BA60 is a Darlington power transistor module with a **ULTRA HIGH**  $h_{FE}$ , high speed, high power Darlington transistor. The transistor has a reverse paralleled fast recovery diode ( $t_{rr}$  : 200ns). The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction,

- $I_C=300A$ ,  $V_{CEX}=600V$
- Low saturation voltage for higher efficiency.
- ULTRA HIGH DC current gain  $h_{FE}$ .  $h_{FE} \geq 750$
- Isolated mounting base
- $V_{EBO}$  10V for faster switching speed.

### (Applications)

Motor Control (VVF), AC/DC Servo, UPS, Switching Power Supply, Ultrasonic Application

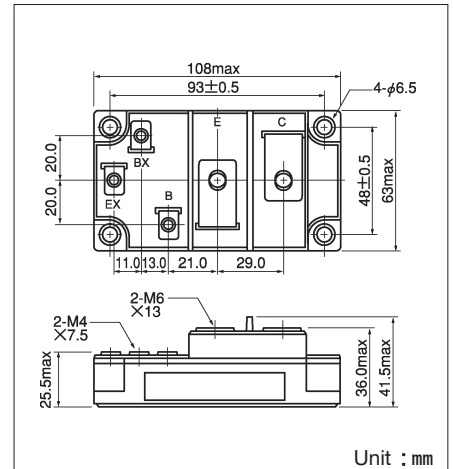

### Maximum Ratings

( $T_j=25^\circ C$ )

Symbol	Item	Conditions	Ratings		Unit
			SQD300BA60		
$V_{CBO}$	Collector-Base Voltage		600		V
$V_{CEX}$	Collector-Emitter Voltage	$V_{BE} = -2V$	600		V
$V_{EBO}$	Emitter-Base Voltage		10		V
$I_C$	Collector Current	( ) = $p_w \leq 1ms$	300 (600)		A
$-I_C$	Reverse Collector Current		300		A
$I_B$	Base Current		18		A
$P_T$	Total power dissipation	$T_C = 25^\circ C$	1380		W
$T_j$	Junction Temperature		-40 ~ +150		$^\circ C$
$T_{stg}$	Storage Temperature		-40 ~ +125		$^\circ C$
$V_{ISO}$	Isolation Voltage	A.C.1minute	2500		V
	Mounting Torque	(M6)	Recommended Value 2.5~3.9 (25~40)		N·m (kgf·cm)
		Terminal (M6)	Recommended Value 2.5~3.9 (25~40)		
		Terminal (M4)	Recommended Value 1.0~1.4 (10~14)		
	Mass	Typical Value	460		g

### Electrical Characteristics

( $T_j=25^\circ C$ )

Symbol	Item	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
$I_{CBO}$	Collector Cut-off Current	$V_{CB} = V_{CBO}$			4.0	mA
$I_{EBO}$	Emitter Cut-off Current	$V_{EB} = V_{EBO}$			1200	mA
$V_{CEO(SUS)}$	Collector Emitter Sustaining Voltage	$I_C = 1A$	450			V
$V_{CEX(SUS)}$		$I_C = 60A, I_{B2} = -10A$	600			
$h_{FE}$	DC Current Gain	$I_C = 300A, V_{CE} = 2.5V$	750			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 300A, I_B = 400mA$			2.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 300A, I_B = 400mA$			3.0	V
$t_{on}$	Switching Time	On Time			2.0	$\mu s$
$t_s$		Storage Time	$V_{CC} = 300V, I_C = 300A$		8.0	
$t_f$		Fall Time	$I_{B1} = 0.6A, I_{B2} = -6A$		2.0	
$V_{ECO}$	Collector-Emitter Reverse Voltage	$I_C = -300A$			1.8	V
$t_{rr}$	Reverse Recovery time	$V_{CC} = 300V, I_C = -300A, -di/dt = 300A/\mu s, V_{BE} = -5V$		200		ns
$R_{th(j-c)}$	Thermal Impedance (junction to case)	Transistor part			0.09	$^\circ C/W$
		Diode part			0.3	

