


SMALL SIGNAL NPN TRANSISTORS


Type	Marking
BSV52	B2
SO2369	N11
SO2369A	N81

- SILICON EPITAXIAL PLANAR NPN TRANSISTORS
- MINIATURE PLASTIC PACKAGE FOR APPLICATION IN SURFACE MOUNTING CIRCUITS
- LOW CURRENT, FAST SWITCHING APPLICATIONS.



SOT-23

INTERNAL SCHEMATIC DIAGRAM



SC08960

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		SO2369/A	BSV52	
V_{CES}	Collector-Emitter Voltage ($V_{BE} = 0$)	40	20	V
V_{CBO}	Collector-Base Voltage ($I_E = 0$)	40	20	V
V_{CEO}	Collector-Emitter Voltage ($I_B = 0$)	15	12	V
V_{EBO}	Emitter-Base Voltage ($I_C = 0$)	4.5	5	V
I_{CM}	Collector Peak Current	0.2		A
P_{tot}	Total Dissipation at $T_c = 25^\circ\text{C}$	200		mW
T_{stg}	Storage Temperature	-65 to 150		$^\circ\text{C}$
T_j	Max. Operating Junction Temperature	150		$^\circ\text{C}$

BSV52/SO2369/SO2369A

THERMAL DATA

$R_{thj-amb}$	Thermal Resistance Junction-Ambient	Max	620	$^{\circ}\text{C}/\text{W}$
R_{thj-SR}	Thermal Resistance Junction-Substrate	Max	400	$^{\circ}\text{C}/\text{W}$

• Mounted on a ceramic substrate area = 7 x 5 x 0.5 mm

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CBO}	Collector Cut-off Current ($I_E = 0$)	$V_{CB} = 20\text{ V}$ for SO2369/SO2369A $V_{CB} = 10\text{ V}$ for BSV52 $V_{CB} = 10\text{ V}$ $T_j = 150^{\circ}\text{C}$ for BSV52			400 100 5	nA nA μA
I_{CES}	Collector Cut-off Current ($V_{BE} = 0$)	$V_{CB} = 20\text{ V}$ for SO2369A			400	nA
$V_{(BR)CES}^*$	Collector-Emitter Breakdown Voltage ($I_B = 0$)	$I_C = 10\ \mu\text{A}$ for SO2369/SO2369A for BSV52	40 20			V V
$V_{(BR)CEO}^*$	Collector-Emitter Breakdown Voltage ($I_B = 0$)	$I_C = 10\text{ mA}$ for SO2369/SO2369A for BSV52	15 12			V V
$V_{(BR)CBO}^*$	Collector-Base Breakdown Voltage ($I_B = 0$)	$I_C = 10\ \mu\text{A}$ for SO2369/SO2369A for BSV52	40 20			V V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ($I_C = 0$)	$I_E = 10\ \mu\text{A}$ for SO2369/SO2369A for BSV52	4.5 5			V V
$V_{CE(sat)}^*$	Collector-Emitter Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 0.3\text{ mA}$ for BSV52 $I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ for SO2369A for BSV52 $I_C = 30\text{ mA}$ $I_B = 3\text{ mA}$ for SO2369 BSV52 $I_C = 50\text{ mA}$ $I_B = 5\text{ mA}$ for BSV52 $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ for SO2369A			0.3 0.2 0.25 0.25 0.4 0.5	V V V V V V
$V_{BE(sat)}^*$	Collector-Base Saturation Voltage	$I_C = 10\text{ mA}$ $I_B = 1\text{ mA}$ $I_C = 30\text{ mA}$ $I_B = 3\text{ mA}$ for SO2369A $I_C = 50\text{ mA}$ $I_B = 5\text{ mA}$ for BSV52 $I_C = 100\text{ mA}$ $I_B = 10\text{ mA}$ for SO2369A	0.7		0.85 1.15 1.2 1.6	V V V V
h_{FE}^*	DC Current Gain	$I_C = 1\text{ mA}$ $V_{CE} = 1\text{ V}$ for BSV52 $I_C = 10\text{ mA}$ $V_{CE} = 0.35\text{ V}$ for SO2369A $I_C = 10\text{ mA}$ $V_{CE} = 1\text{ V}$ for All types $I_C = 30\text{ mA}$ $V_{CE} = 0.4\text{ V}$ for SO2369A $I_C = 50\text{ mA}$ $V_{CE} = 1\text{ V}$ for BSV52 $I_C = 100\text{ mA}$ $V_{CE} = 1\text{ V}$ for SO2369A $I_C = 100\text{ mA}$ $V_{CE} = 2\text{ V}$ for SO2369	25 40 40 30 25 20 20		120 120	

* Pulsed: Pulse duration = 300 μs , duty cycle $\leq 2\%$


ELECTRICAL CHARACTERISTICS (Continued)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
f_T	Transition Frequency	$I_C = 10 \text{ mA}$ $V_{CE} = 10 \text{ V}$ $f = 100 \text{ MHz}$ for SO2369A for BSV52/SO2369	500 400			MHz MHz
C_{CB}	Collector Base Capacitance	$I_E = 0$ $V_{CE} = 5 \text{ V}$ $f = 1 \text{ MHz}$			4	pF
C_{EB}	Emitter Base Capacitance	$I_C = 0$ $V_{EB} = 1 \text{ V}$ $f = 1 \text{ MHz}$ for BSV52			4.5	pF
t_{on}	Turn On Time	$I_C = 10 \text{ mA}$ $V_{BE} = -0.5 \text{ V}$ $I_B = 3 \text{ mA}$			12	ns
t_s	Storage Time	$I_C = 10 \text{ mA}$ $I_{B1} = -I_{B2} = 10 \text{ mA}$			13	ns
t_{off}	Turn Off Time	$I_C = 10 \text{ mA}$ $I_{B1} = 3 \text{ mA}$ $I_{B2} = -1.5 \text{ mA}$			18	ns

* Pulsed: Pulse duration = 300 μs , duty cycle $\leq 2\%$

SOT-23 MECHANICAL DATA

DIM.	mm			mils		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		118
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	3.5		6.7

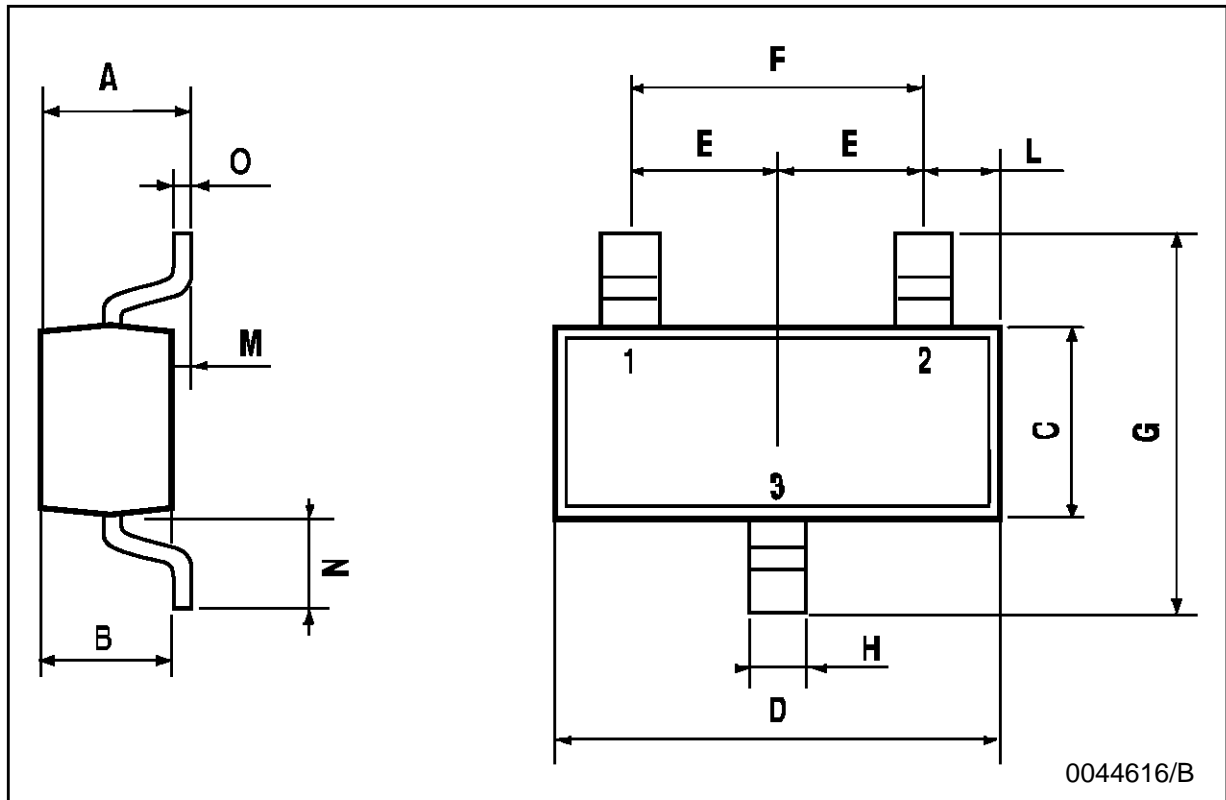

0044616/B

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1995 SGS-THOMSON Microelectronics - Printed in Italy - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A