



74VCX16374

LOW VOLTAGE CMOS 16-BIT D-TYPE FLIP-FLOP (3-STATE) WITH 3.6V TOLERANT INPUTS AND OUTPUTS

- 3.6V TOLERANT INPUTS AND OUTPUTS
- HIGH SPEED :
 $t_{PD} = 3.0 \text{ ns (MAX.)}$ at $V_{CC} = 3.0 \text{ to } 3.6V$
 $t_{PD} = 3.4 \text{ ns (MAX.)}$ at $V_{CC} = 2.3 \text{ to } 2.7V$
 $t_{PD} = 6.8 \text{ ns (MAX.)}$ at $V_{CC} = 1.8V$
- POWER DOWN PROTECTION ON INPUTS AND OUTPUTS
- SYMMETRICAL OUTPUT IMPEDANCE:
 $|I_{OH}| = I_{OL} = 24\text{mA (MIN)}$ at $V_{CC} = 3.0V$
 $|I_{OH}| = I_{OL} = 18\text{mA (MIN)}$ at $V_{CC} = 2.3V$
 $|I_{OH}| = I_{OL} = 6\text{mA (MIN)}$ at $V_{CC} = 1.8V$
- OPERATING VOLTAGE RANGE:
 $V_{CC(OPR)} = 1.8V \text{ to } 3.6V$
- PIN AND FUNCTION COMPATIBLE WITH 74 SERIES 16374
- LATCH-UP PERFORMANCE EXCEEDS 300mA (JESD 17)
- ESD PERFORMANCE:
HBM > 2000V (MIL STD 883 method 3015);
MM > 200V

DESCRIPTION

The 74VCX16374 is a low voltage CMOS 16 BIT D-TYPE FLIP-FLOP with 3 STATE OUTPUTS NON INVERTING fabricated with sub-micron silicon gate and five-layer metal wiring C²MOS technology. It is ideal for low power and very high speed 1.8 to 3.6V applications; it can be interfaced to 3.6V signal environment for both inputs and outputs.

These 16 bit D-TYPE flip-flops are controlled by two clock inputs (nCK) and two output enable inputs (nOE).

On the positive transition of the (nCK), the nQ outputs will be set to the logic state that were setup at the nD inputs.

While the (nOE) input is low, the 8 outputs (nQ) will be in a normal state (HIGH or LOW logic level) and while high level the outputs will be in a high impedance state.

Any output control does not affect the internal operation of flip flops; that is, the old data can be retained or the new data can be entered even while the outputs are off.


All inputs and outputs are equipped with protection circuits against static discharge, giving them 2KV ESD immunity and transient excess voltage.



ORDER CODES


PACKAGE	TUBE	T & R
TSSOP		74VCX16374TTR

PIN CONNECTION

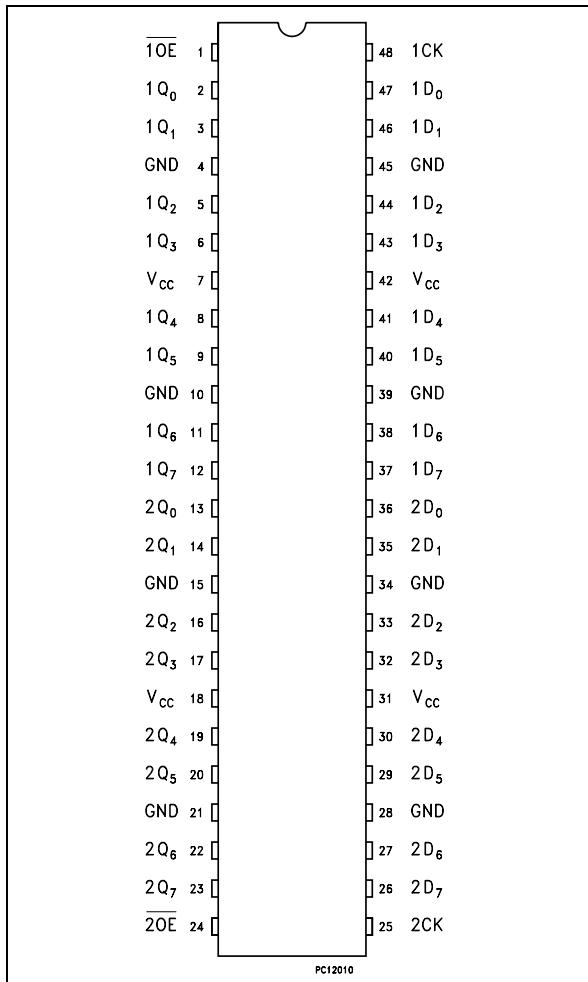

74VCX16374


INPUT AND OUTPUT EQUIVALENT CIRCUIT

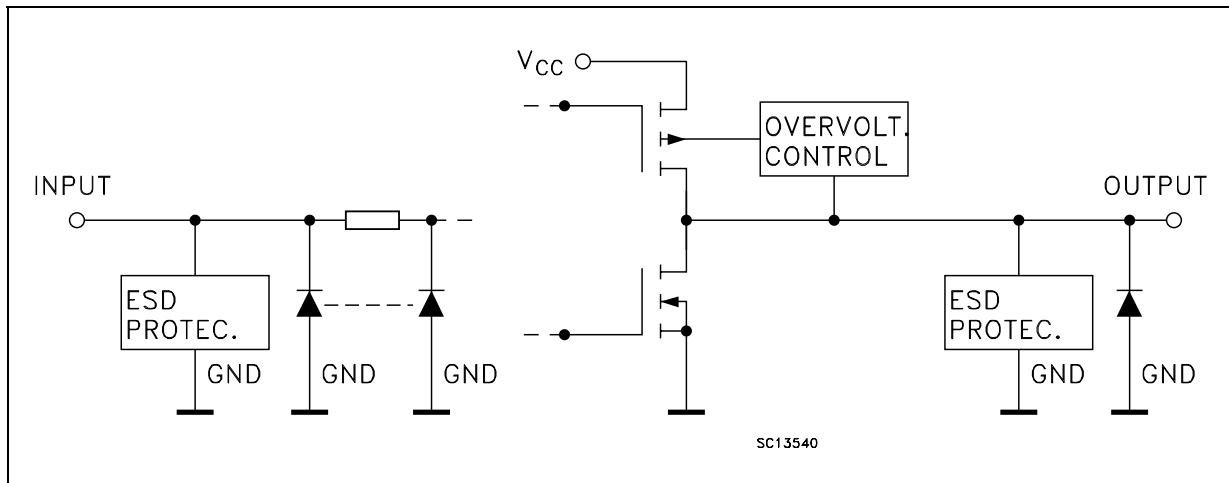

PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
1	\overline{OE}	3 State Output Enable Input (Active LOW)
2, 3, 5, 6, 8, 9, 11, 12	$1Q_0$ to $1Q_7$	3-State Outputs
13, 14, 16, 17, 19, 20, 22, 23	$2Q_0$ to $2Q_7$	3-State Outputs
24	$2OE$	3 State Output Enable Input (Active LOW)
25	$2CK$	Clock Input
36, 35, 33, 32, 30, 29, 27, 26	$2D_0$ to $2D_7$	Data Inputs
47, 46, 44, 43, 41, 40, 38, 37	$1D_0$ to $1D_7$	Data Inputs
48	$1CK$	Clock Input
4, 10, 15, 21, 28, 34, 39, 45	GND	Ground (0V)
7, 18, 31, 42	V_{CC}	Positive Supply Voltage

IEC LOGIC SYMBOLS

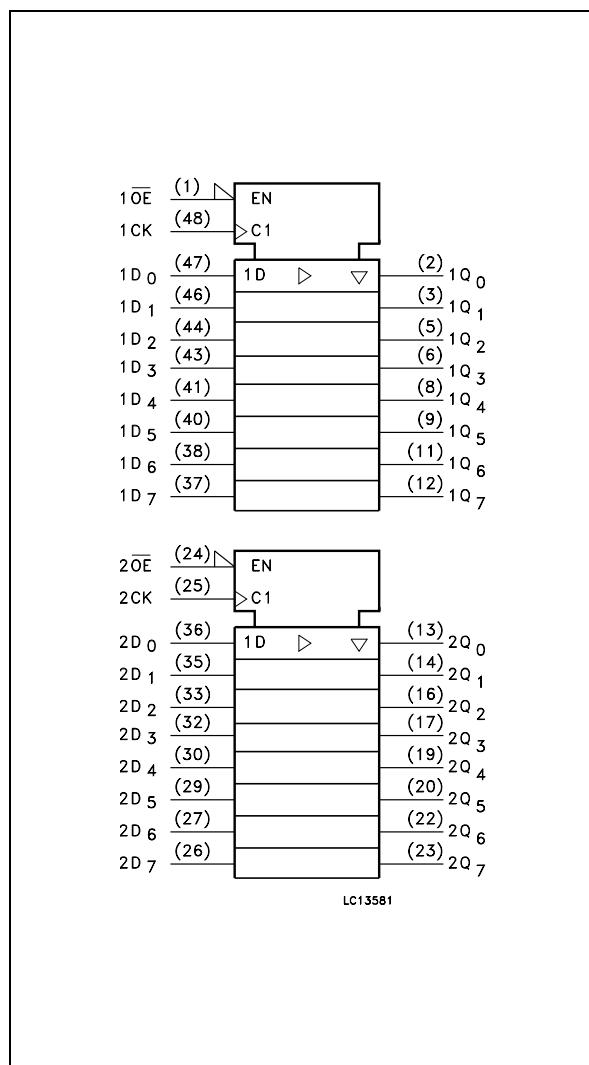


TRUTH TABLE

INPUTS			OUTPUT
\overline{OE}	CK	D	Q
H	X	X	Z
L	$\overline{\square}$	X	NO CHANGE*
L	\square	L	L
L	\square	H	H

X : Don't Care

Z : High Impedance

LOGIC DIAGRAM

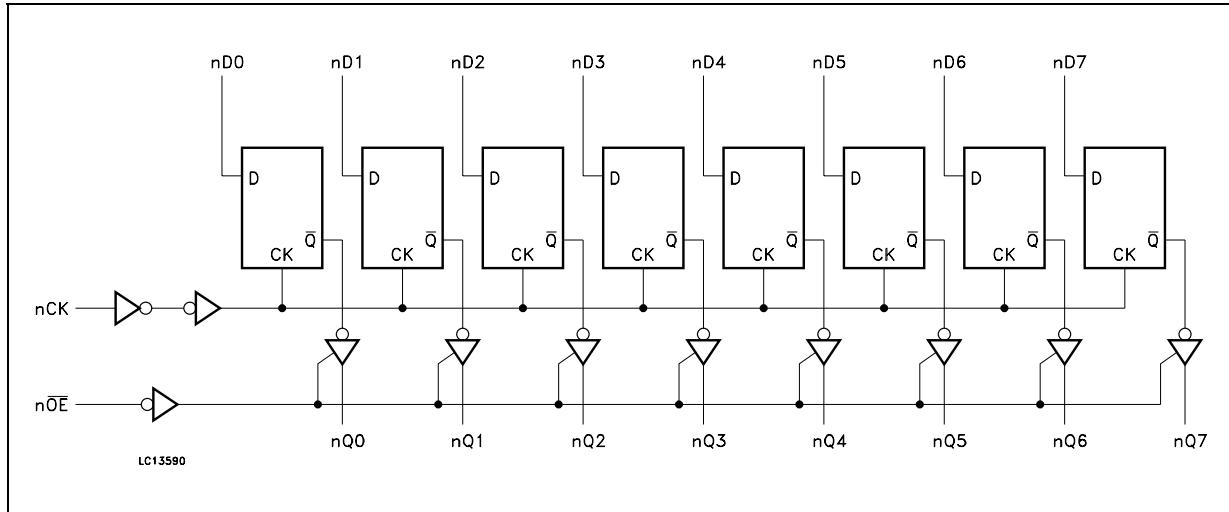

This logic diagram has not to be used to estimate propagation delays

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	-0.5 to +4.6	V
V_I	DC Input Voltage	-0.5 to +4.6	V
V_O	DC Output Voltage (OFF State)	-0.5 to +4.6	V
V_O	DC Output Voltage (High or Low State) (note 1)	-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	- 50	mA
I_{OK}	DC Output Diode Current (note 2)	- 50	mA
I_O	DC Output Current	± 50	mA
I_{CC} or I_{GND}	DC V_{CC} or Ground Current per Supply Pin	± 100	mA
P_D	Power Dissipation	400	mW
T_{stg}	Storage Temperature	-65 to +150	°C
T_L	Lead Temperature (10 sec)	300	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

1) I_O absolute maximum rating must be observed

2) $V_O < GND$, $V_O > V_{CC}$

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	1.8 to 3.6	V
V_I	Input Voltage	-0.3 to 3.6	V
V_O	Output Voltage (OFF State)	0 to 3.6	V
V_O	Output Voltage (High or Low State)	0 to V_{CC}	V
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 3.0$ to 3.6V)	± 24	mA
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 2.3$ to 2.7V)	± 18	mA
I_{OH}, I_{OL}	High or Low Level Output Current ($V_{CC} = 1.8V$)	± 6	mA
T_{op}	Operating Temperature	-55 to 125	°C
dt/dv	Input Rise and Fall Time (note 1)	0 to 10	ns/V

1) V_{IN} from 0.8V to 2V at $V_{CC} = 3.0V$

DC SPECIFICATIONS ($2.7V < V_{CC} \leq 3.6V$ unless otherwise specified)

Symbol	Parameter	Test Condition		Value				Unit	
		V_{CC} (V)		-40 to 85 °C		-55 to 125 °C			
				Min.	Max.	Min.	Max.		
V_{IH}	High Level Input Voltage	2.7 to 3.6		2.0		2.0		V	
V_{IL}	Low Level Input Voltage				0.8		0.8		
V_{OH}	High Level Output Voltage	2.7 to 3.6	$I_O = -100 \mu A$	$V_{CC} - 0.2$		$V_{CC} - 0.2$		V	
		2.7	$I_O = -12 mA$	2.2		2.2			
		3.0	$I_O = -18 mA$	2.4		2.4			
			$I_O = -24 mA$	2.2		2.2			
V_{OL}	Low Level Output Voltage	2.7 to 3.6	$I_O = 100 \mu A$		0.2		0.2	V	
		2.7	$I_O = 12 mA$		0.4		0.4		
		3.0	$I_O = 18 mA$		0.4		0.4		
			$I_O = 24 mA$		0.55		0.55		
I_I	Input Leakage Current	2.7 to 3.6	$V_I = 0$ to 3.6V		± 5		± 5	μA	
I_{off}	Power Off Leakage Current	0	V_I or $V_O = 0$ to 3.6V		10		10	μA	
I_{OZ}	High Impedance Output Leakage Current	2.7 to 3.6	$V_I = V_{IH}$ or V_{IL} $V_O = 0$ to 3.6V		± 10		± 10	μA	
I_{CC}	Quiescent Supply Current	2.7 to 3.6	$V_I = V_{CC}$ or GND		20		20	μA	
			V_I or $V_O = V_{CC}$ to 3.6V		± 20		± 20		
ΔI_{CC}	I_{CC} incr. per Input	2.7 to 3.6	$V_{IH} = V_{CC} - 0.6V$		750		750	μA	

DC SPECIFICATIONS ($2.3V < V_{CC} \leq 2.7V$ unless otherwise specified)

Symbol	Parameter	Test Condition		Value				Unit	
		V_{CC} (V)		-40 to 85 °C		-55 to 125 °C			
				Min.	Max.	Min.	Max.		
V_{IH}	High Level Input Voltage	2.3 to 2.7		1.6		1.6		V	
V_{IL}	Low Level Input Voltage				0.7		0.7		
V_{OH}	High Level Output Voltage	2.3 to 2.7	$I_O=-100\ \mu A$	$V_{CC}-0.2$		$V_{CC}-0.2$		V	
		2.3	$I_O=-6\ mA$	2.0		2.0			
			$I_O=-12\ mA$	1.8		1.8			
			$I_O=-18\ mA$	1.7		1.7			
V_{OL}	Low Level Output Voltage	2.3 to 2.7	$I_O=100\ \mu A$		0.2		0.2	V	
		2.3	$I_O=12\ mA$		0.4		0.4		
			$I_O=18\ mA$		0.6		0.6		
I_I	Input Leakage Current	2.3 to 2.7	$V_I = 0\ to\ 3.6V$		± 5		± 5	μA	
I_{off}	Power Off Leakage Current	0	$V_I\ or\ V_O = 0\ to\ 3.6V$		10		10	μA	
I_{OZ}	High Impedance Output Leakage Current	2.3 to 2.7	$V_I = V_{IH}\ or\ V_{IL}$ $V_O = 0\ to\ 3.6V$		± 10		± 10	μA	
I_{CC}	Quiescent Supply Current	2.3 to 2.7	$V_I = V_{CC}\ or\ GND$		20		20	μA	
			$V_I\ or\ V_O = V_{CC}\ to\ 3.6V$		± 20		± 20		

DC SPECIFICATIONS ($1.8V \leq V_{CC} \leq 2.3V$ unless otherwise specified)

Symbol	Parameter	Test Condition		Value				Unit	
		V_{CC} (V)		-40 to 85 °C		-55 to 125 °C			
				Min.	Max.	Min.	Max.		
V_{IH}	High Level Input Voltage	1.8 to 2.3		0.7 VCC		0.7 VCC		V	
V_{IL}	Low Level Input Voltage				0.2 VCC		0.2 VCC		
V_{OH}	High Level Output Voltage	1.8	$I_O=-100\ \mu A$	$V_{CC}-0.2$		$V_{CC}-0.2$		V	
			$I_O=-6\ mA$	1.4		1.4			
V_{OL}	Low Level Output Voltage	1.8	$I_O=100\ \mu A$		0.2		0.2	V	
			$I_O=6\ mA$		0.3		0.3		
I_I	Input Leakage Current	1.8	$V_I = 0\ to\ 3.6V$		± 5		± 5	μA	
I_{off}	Power Off Leakage Current	0	$V_I\ or\ V_O = 0\ to\ 3.6V$		10		10	μA	
I_{OZ}	High Impedance Output Leakage Current	1.8	$V_I = V_{IH}\ or\ V_{IL}$ $V_O = 0\ to\ 3.6V$		± 10		± 10	μA	
I_{CC}	Quiescent Supply Current	1.8	$V_I = V_{CC}\ or\ GND$		20		20	μA	
			$V_I\ or\ V_O = V_{CC}\ to\ 3.6V$		± 20		± 20		

74VCX16374

DYNAMIC SWITCHING CHARACTERISTICS ($T_a = 25^\circ\text{C}$, Input $t_r = t_f = 2.0\text{ns}$, $C_L = 30\text{pF}$, $R_L = 500\Omega$)

Symbol	Parameter	Test Condition		Value			Unit	
		V_{CC} (V)		$T_A = 25^\circ\text{C}$				
				Min.	Typ.	Max.		
V_{OLP}	Dynamic Low Voltage Quiet Output (note 1, 3)	1.8	$V_{IL} = 0\text{V}$ $V_{IH} = V_{CC}$		0.25		V	
		2.5			0.6			
		3.3			0.8			
V_{OLV}	Dynamic Low Voltage Quiet Output (note 1, 3)	1.8	$V_{IL} = 0\text{V}$ $V_{IH} = V_{CC}$		-0.25		V	
		2.5			-0.6			
		3.3			-0.8			
V_{OHV}	Dynamic High Voltage Quiet Output (note 2, 3)	1.8	$V_{IL} = 0\text{V}$ $V_{IH} = V_{CC}$		1.5		V	
		2.5			1.9			
		3.3			2.2			

1) Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH to LOW or LOW to HIGH. The remaining output is measured in the LOW state.

2) Number of outputs defined as "n". Measured with "n-1" outputs switching from HIGH to LOW or LOW to HIGH. The remaining output is measured in the HIGH state.

3) Parameters guaranteed by design.

AC ELECTRICAL CHARACTERISTICS ($C_L = 30\text{pF}$, $R_L = 500\Omega$, Input $t_r = t_f = 2.0\text{ns}$)

Symbol	Parameter	Test Condition		Value				Unit	
		V_{CC} (V)		-40 to 85 °C		-55 to 125 °C			
				Min.	Max.	Min.	Max.		
t_{PLH} t_{PHL}	Propagation Delay Time CK to Qn	1.8		1.5	6.8	1.5	8.0	ns	
		2.3 to 2.7		1.0	3.4	1.0	4.3		
		3.0 to 3.6		0.8	3.0	0.8	4.1		
t_{PZL} t_{PZH}	Output Enable Time	1.8		1.5	9.2	1.5	10.6	ns	
		2.3 to 2.7		1.0	4.6	1.0	6.0		
		3.0 to 3.6		0.8	3.5	0.8	5.4		
t_{PLZ} t_{PHZ}	Output Disable Time	1.8		1.5	6.8	1.5	8.0	ns	
		2.3 to 2.7		1.0	3.8	1.0	4.7		
		3.0 to 3.6		0.8	3.5	0.8	4.2		
t_s	Setup Time, HIGH or LOW level Dn to CK	1.8		2.5		2.5		ns	
		2.3 to 2.7		1.5		1.5			
		3.0 to 3.6		1.5		1.5			
t_h	Hold Time High or LOW level Dn to CK	1.8		1.0		1.0		ns	
		2.3 to 2.7		1.0		1.0			
		3.0 to 3.6		1.0		1.0			
t_w	CK Pulse Width, HIGH	1.8		4.0		4.0		ns	
		2.3 to 2.7		1.5		1.5			
		3.0 to 3.6		1.5		1.5			
f_{MAX}	Clock Pulse Frequency	1.8		125		110		MHz	
		2.3 to 2.7		200		190			
		3.0 to 3.6		250		235			
t_{OSLH} t_{OSHl}	Output To Output Skew Time (note1, 2)	1.8			0.75		0.75	ns	
		2.3 to 2.7			0.5		0.5		
		3.0 to 3.6			0.5		0.5		

1) Skew is defined as the absolute value of the difference between the actual propagation delay for any two outputs of the same device switching in the same direction, either HIGH or LOW ($t_{OSLH} = |t_{PLHm} - t_{PLHn}|$, $t_{OSHl} = |t_{PHLm} - t_{PHLn}|$)


2) Parameter guaranteed by design

CAPACITIVE CHARACTERISTICS

Symbol	Parameter	Test Condition		Value			Unit	
		V_{CC} (V)		$T_A = 25^\circ C$				
				Min.	Typ.	Max.		
C_{IN}	Input Capacitance	1.8, 2.5 or 3.3	$V_{IN} = 0$ or V_{CC}		6		pF	
C_{OUT}	Output Capacitance	1.8, 2.5 or 3.3	$V_{IN} = 0$ or V_{CC}		7		pF	
C_{PD}	Power Dissipation Capacitance (note 1)	1.8, 2.5 or 3.3	$f_{IN} = 10MHz$ $V_{IN} = 0$ or V_{CC}		20		pF	

1) C_{PD} is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation. $I_{CC(opr)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}/16$ (per circuit)

TEST CIRCUIT

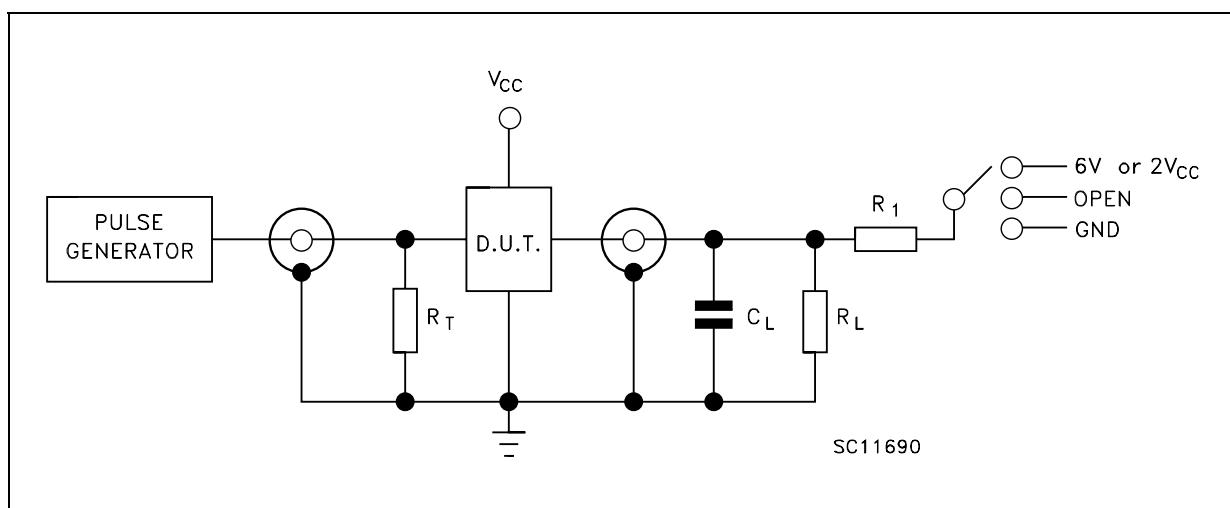

TEST	SWITCH
t_{PLH}, t_{PHL}	Open
t_{PZL}, t_{PLZ} ($V_{CC} = 3.0$ to $3.6V$)	6V
t_{PZL}, t_{PLZ} ($V_{CC} = 2.3$ to $2.7V$ or $1.8V$)	$2V_{CC}$
t_{PZH}, t_{PHZ}	GND

$C_L = 30$ pF or equivalent (includes jig and probe capacitance)


$R_L = R_1 = 500\Omega$ or equivalent

$R_T = Z_{OUT}$ of pulse generator (typically 50Ω)


WAVEFORM SYMBOL VALUES


Symbol	V_{CC}		
	3.0 to 3.6V	2.3 to 2.7V	1.8V
V_{IH}	2.7V	V_{CC}	V_{CC}
V_M	1.5V	$V_{CC}/2$	$V_{CC}/2$
V_X	$V_{OL} + 0.3V$	$V_{OL} + 0.15V$	$V_{OL} + 0.15V$
V_Y	$V_{OH} - 0.3V$	$V_{OH} - 0.15V$	$V_{OH} - 0.15V$

WAVEFORM 1: nCK TO Qn PROPAGATION DELAYS, nCK MAXIMUM FREQUENCY, Dn TO nCK SETUP AND HOLD TIMES (f=1MHz; 50% duty cycle)

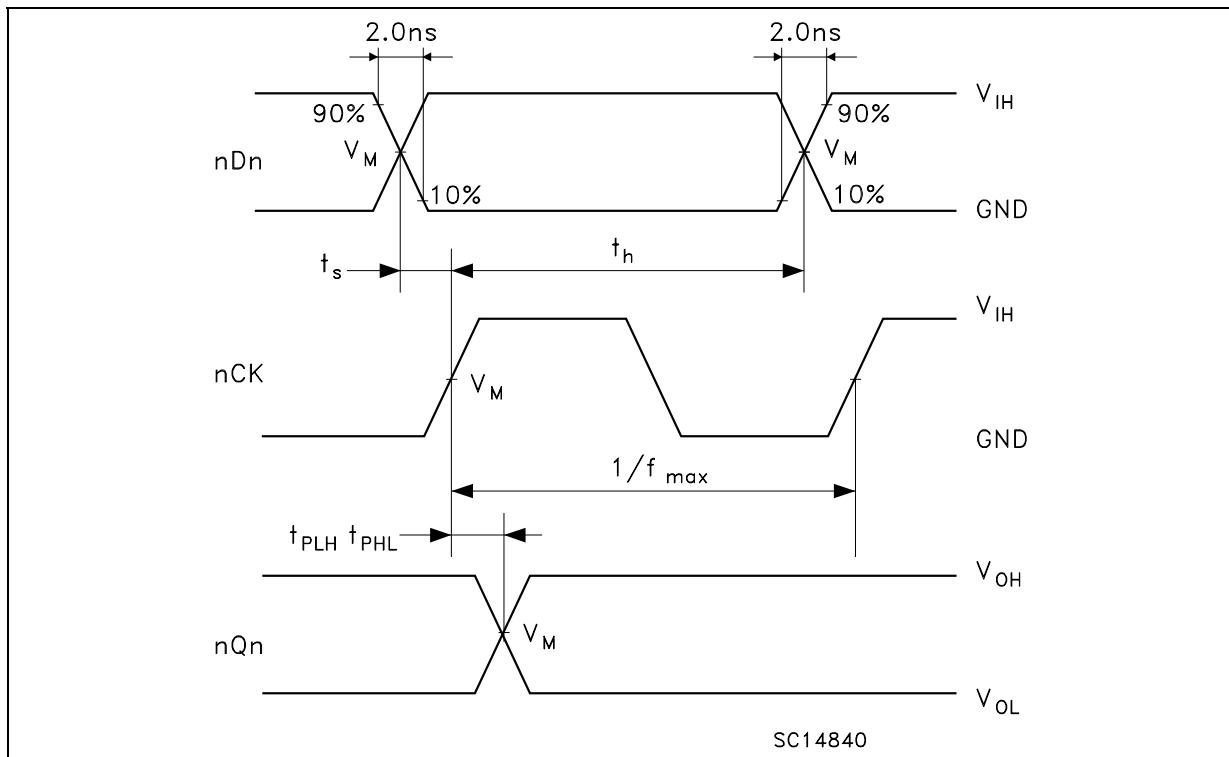


WAVEFORM 2: OUTPUT ENABLE AND DISABLE TIME (f=1MHz; 50% duty cycle)

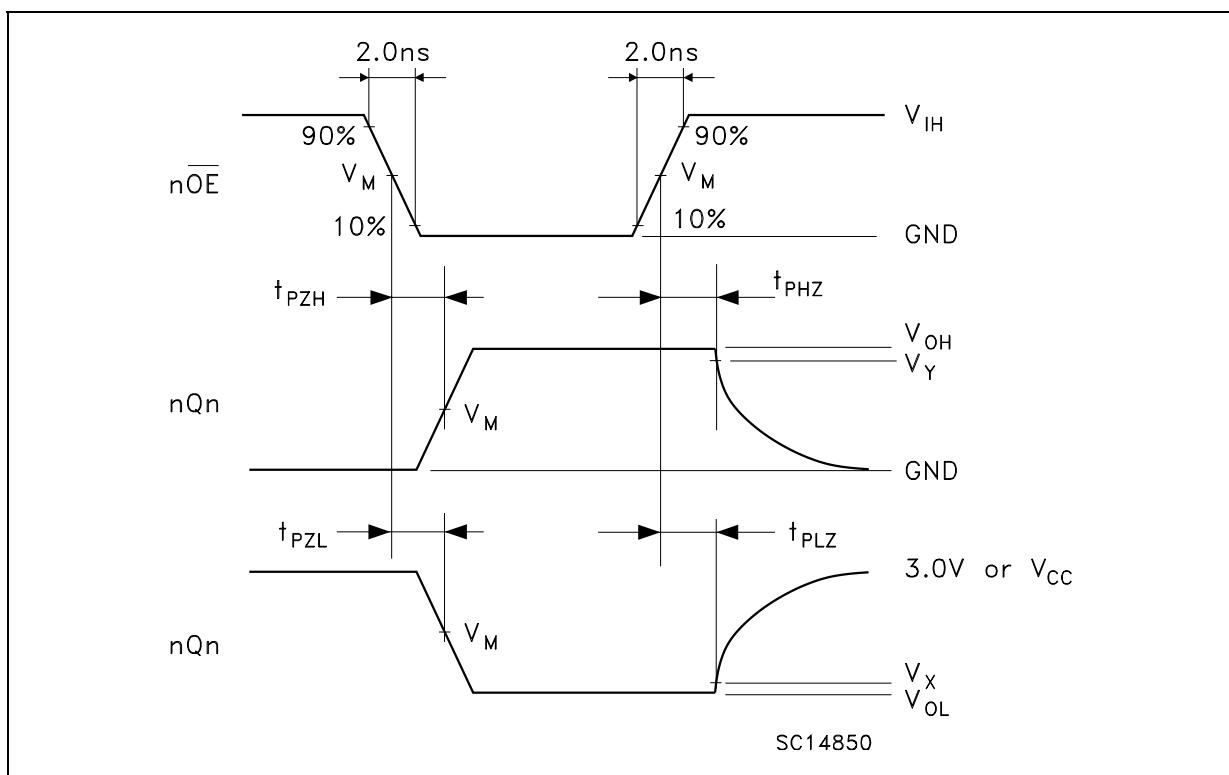

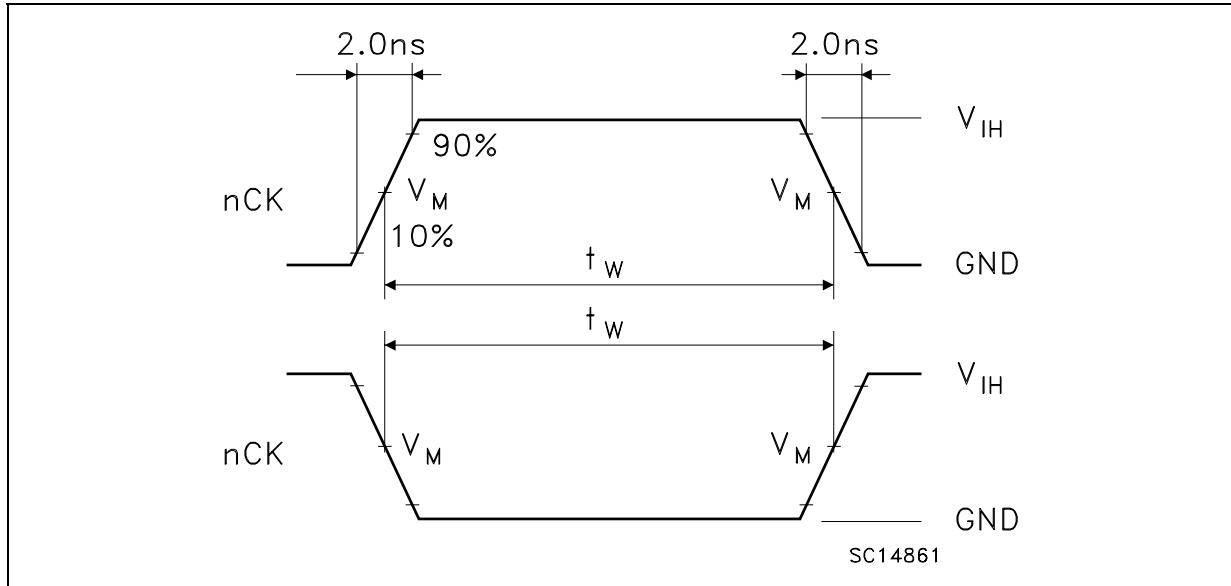WAVEFORM 3 : nCK MINIMUM PULSE WIDTH (f=1MHz; 50% duty cycle)




TSSOP48 MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.2			0.047
A1	0.05		0.15	0.002		0.006
A2		0.9			0.035	
b	0.17		0.27	0.0067		0.011
c	0.09		0.20	0.0035		0.0079
D	12.4		12.6	0.488		0.496
E		8.1 BSC			0.318 BSC	
E1	6.0		6.2	0.236		0.244
e		0.5 BSC			0.0197 BSC	
K	0°		8°	0°		8°
L	0.50		0.75	0.020		0.030

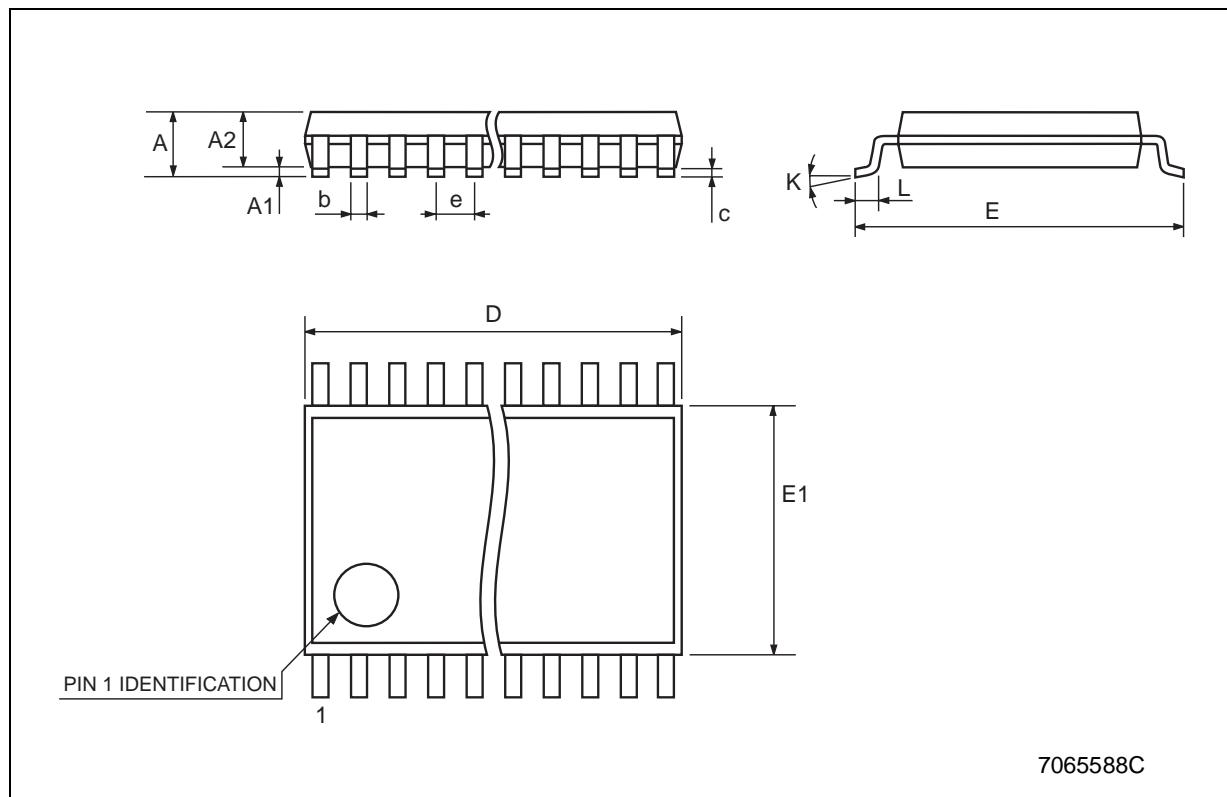

7065588C

Tape & Reel TSSOP48 MECHANICAL DATA						
DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			330			12.992
C	12.8		13.2	0.504		0.519
D	20.2			0.795		
N	60			2.362		
T			30.4			1.197
Ao	8.7		8.9	0.343		0.350
Bo	13.1		13.3	0.516		0.524
Ko	1.5		1.7	0.059		0.067
Po	3.9		4.1	0.153		0.161
P	11.9		12.1	0.468		0.476

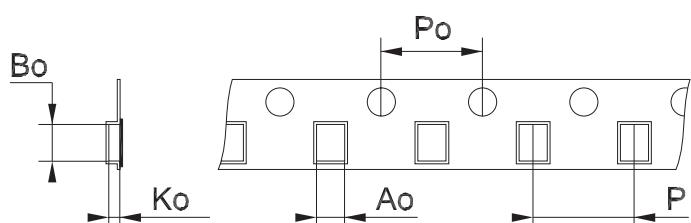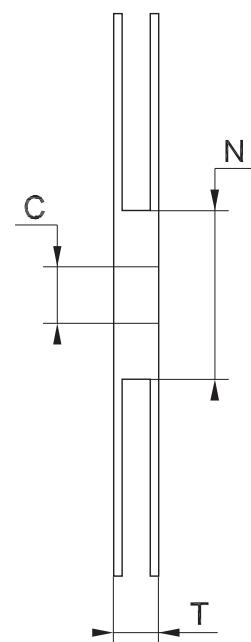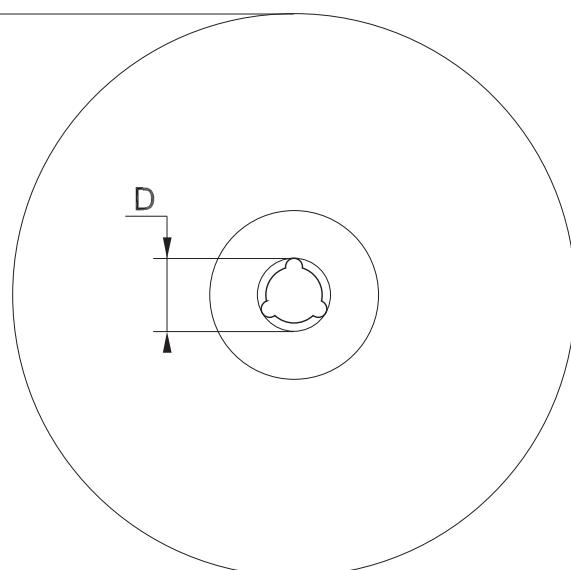

Note: Drawing not in scale

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

© <http://www.st.com>