


DAMPER + MODULATION DIODE FOR VIDEO

MAIN PRODUCT CHARACTERISTICS

	MODUL	DAMPER
$I_{F(AV)}$	3 A	6 A
V_{RRM}	700 V	1500 V
$t_{rr} \text{ (max)}$	55 ns	135 ns
$V_F \text{ (max)}$	1.55 V	1.65 V

FEATURES AND BENEFITS

- 700V Modulation diode
- Full kit in one package
- High breakdown voltage capability
- Very fast recovery diode
- Specified turn on switching characteristics
- Low static and peak forward voltage drop for low dissipation
- Insulated version:
Insulated voltage = 2500 V_{RMS}
Capacitance = 7 pF
- Planar technology allowing high quality and best electrical characteristics
- Outstanding performance of well proven DTV as damper and new faster Turbo 700V technology as modulation.

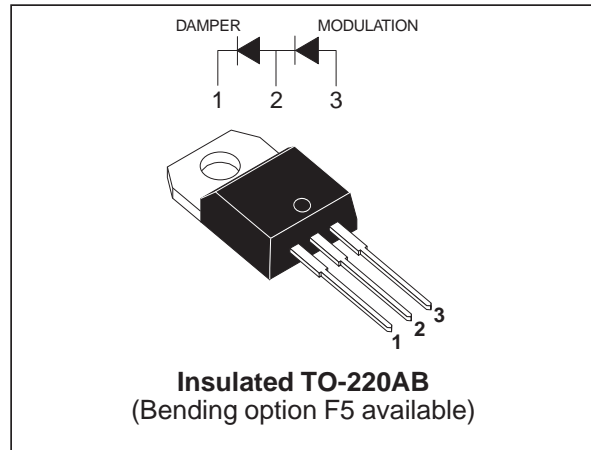

DESCRIPTION

High voltage semiconductor especially designed for horizontal deflection stage in standard and high resolution video display with E/W correction.

The insulated TO-220AB package includes both the DAMPER diode and the MODULATION diode. Assembled on automated line, it offers excellent insulating and dissipating characteristics, thanks to the internal ceramic insulation layer.

ABSOLUTE RATINGS (limiting values, per diode)

Symbol	Parameter	Value		Unit
		MODUL	DAMPER	
V_{RRM}	Repetitive peak reverse voltage	700	1500	V
I_{FSM}	Surge non repetitive forward current	50	75	A
T_{stg}	Storage temperature range	- 40 to + 150		°C
T_j	Maximum operating junction temperature	150		

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
R _{th(j-c)}	Damper junction to case	4.8	°C/W
R _{th(j-c)}	Modulation junction to case	5.5	

STATIC ELECTRICAL CHARACTERISTICS OF THE DAMPER DIODES

Symbol	Parameter	Test conditions	Value				Unit
			T _j = 25°C		T _j = 125°C		
			Typ.	Max.	Typ.	Max.	
V _F *	Forward voltage drop	I _F = 6 A	1.4	2.2	1.2	1.65	V
I _R **	Reverse leakage current	V _R = 1500V		100	100	1000	μA

Pulse test : * tp = 380 μs, δ < 2%
 **tp = 5 ms, δ < 2%

To evaluate the maximum conduction losses of the DAMPER diode use the following equations :

$$P = 1.37 \times I_F(AV) + 0.047 \times I_F^2 (RMS)$$

STATIC ELECTRICAL CHARACTERISTICS OF THE MODULATION DIODE

Symbol	Parameter	Test conditions	Value				Unit
			T _j = 25°C		T _j = 125°C		
			Typ.	Max.	Typ.	Max.	
V _F *	Forward voltage drop	I _F = 3A		2.0	1.25	1.55	V
I _R **	Reverse leakage current	V _R = 700V		20	4	50	μA

Pulse test : * tp = 380 μs, δ < 2%
 **tp = 5 ms, δ < 2%

To evaluate the maximum conduction losses of the MODULATION diode use the following equations :

$$P = 0.98 \times I_F(AV) + 0.19 \times I_F^2 (RMS)$$

RECOVERY CHARACTERISTICS OF THE DAMPER DIODE

Symbol	Parameter	Test conditions	Value		Unit	
			Typ.	Max.		
t _{rr}	Reverse recovery time	I _F = 100mA I _R = 100mA I _{RR} = 10mA	T _j = 25°C	750		ns
t _{rr}	Reverse recovery time	I _F = 1A dI _F /dt = -50A/μs V _R = 30V	T _j = 25°C	110	135	ns

RECOVERY CHARACTERISTICS OF THE MODULATION DIODE

Symbol	Parameter	Test conditions		Value		Unit
				Typ.	Max.	
t_{rr}	Reverse recovery time	$I_F = 100\text{mA}$ $I_R = 100\text{mA}$ $I_{RR} = 10\text{mA}$	$T_j = 25^\circ\text{C}$	120	360	ns
t_{rr}	Reverse recovery time	$I_F = 1\text{A}$ $dI_F/dt = -50\text{A}/\mu\text{s}$ $V_R = 30\text{V}$	$T_j = 25^\circ\text{C}$		55	ns

TURN-ON SWITCHING CHARACTERISTICS OF THE DAMPER DIODE

Symbol	Parameter	Test conditions		Value		Unit
				Typ.	Max.	
t_{fr}	Forward recovery time	$I_F = 6\text{A}$ $dI_F/dt = 80\text{A}/\mu\text{s}$ $V_{FR} = 3\text{V}$	$T_j = 100^\circ\text{C}$	570		ns
V_{FP}	Peak forward voltage	$I_F = 6\text{A}$ $dI_F/dt = 80\text{A}/\mu\text{s}$	$T_j = 100^\circ\text{C}$	21	28	V

TURN-ON SWITCHING CHARACTERISTICS OF THE MODULATION DIODE

Symbol	Parameter	Test conditions		Value		Unit
				Typ.	Max.	
t_{fr}	Forward recovery time	$I_F = 3\text{A}$ $dI_F/dt = 80\text{A}/\mu\text{s}$ $V_{FR} = 2\text{V}$	$T_j = 100^\circ\text{C}$		240	ns
V_{FP}	Peak forward voltage	$I_F = 3\text{A}$ $dI_F/dt = 80\text{A}/\mu\text{s}$	$T_j = 100^\circ\text{C}$		9	V

DMV1500M7

Fig. 1-1: Power dissipation versus peak forward current (triangular waveform, $\delta = 0.45$) (damper diode).

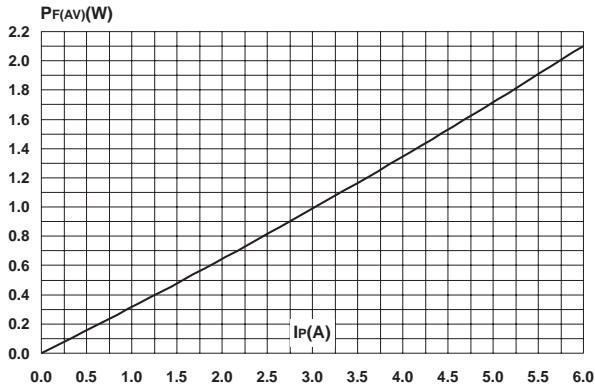


Fig. 1-2: Power dissipation versus peak forward current (triangular waveform, $\delta = 0.45$) (modulation diode).

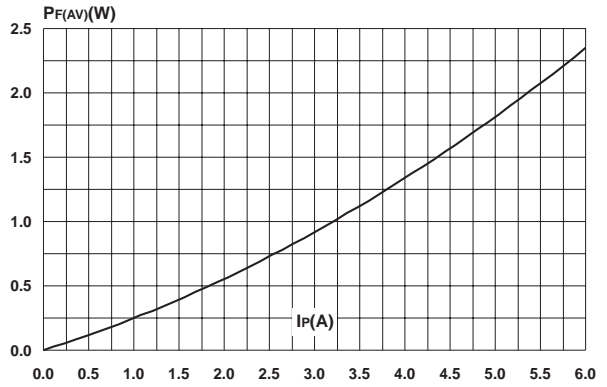


Fig. 2-1: Average forward current versus ambient temperature (damper diode).

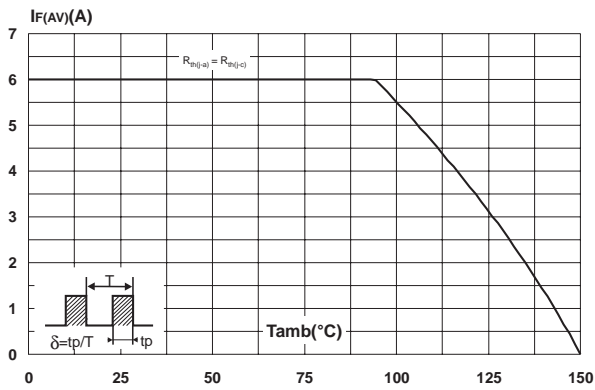


Fig. 2-2: Average forward current versus ambient temperature (modulation diode).

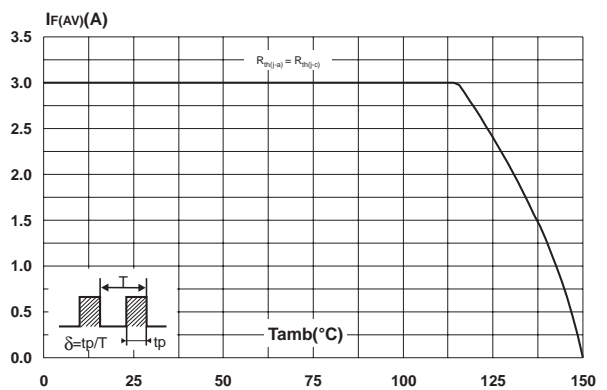


Fig. 3-1: Forward voltage drop versus forward current (damper diode).

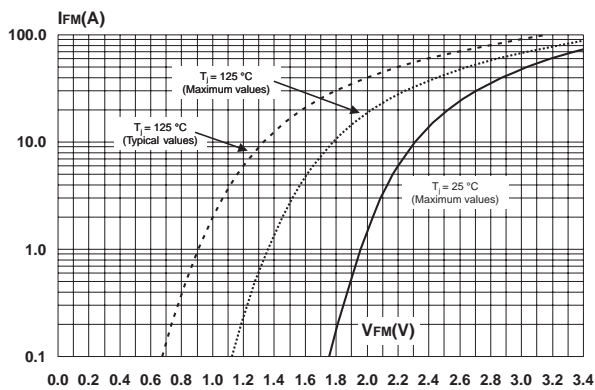


Fig. 3-2: Forward voltage drop versus forward current (modulation diode).

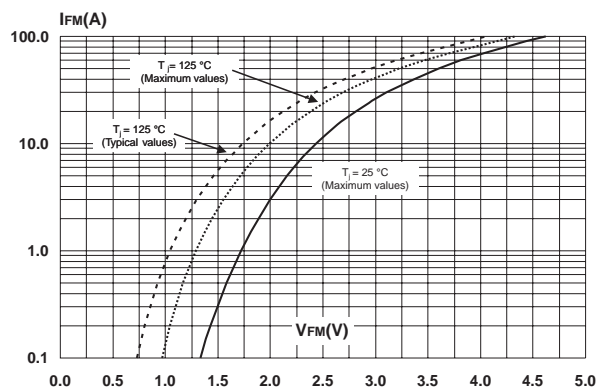


Fig. 4: Relative variation of thermal impedance junction to case versus pulse duration.

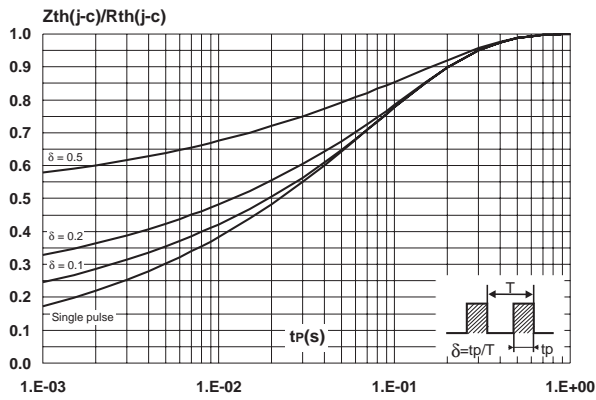


Fig. 5-1: Non repetitive peak forward current versus overload duration (damper diode).

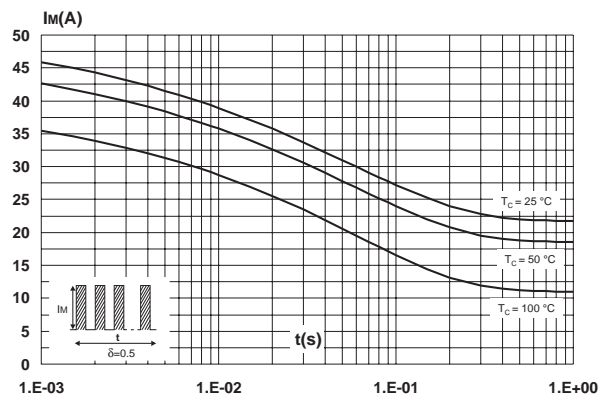


Fig. 5-2: Non repetitive peak forward current versus overload duration (modulation diode).

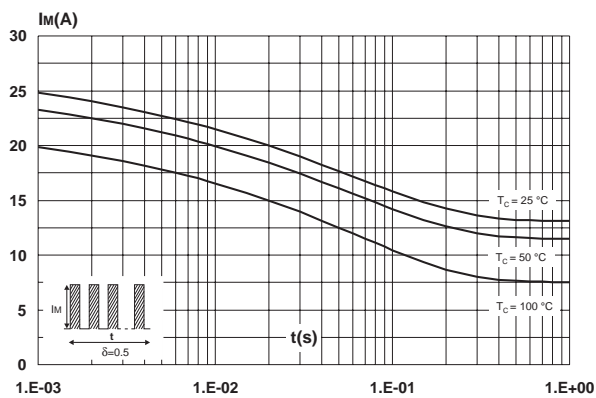


Fig. 6-1: Reverse recovery charges versus dI_F/dt (damper diode).

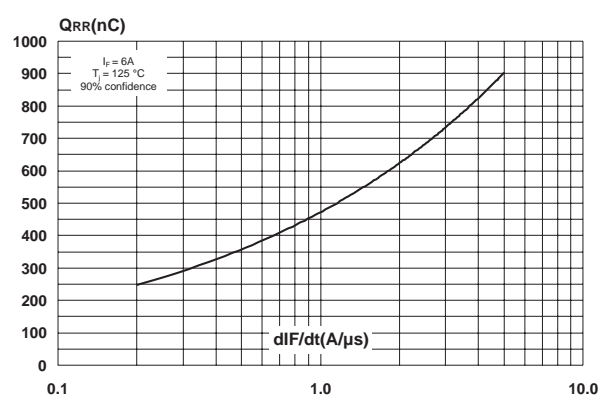


Fig. 6-2: Reverse recovery charges versus dI_F/dt (modulation diode).

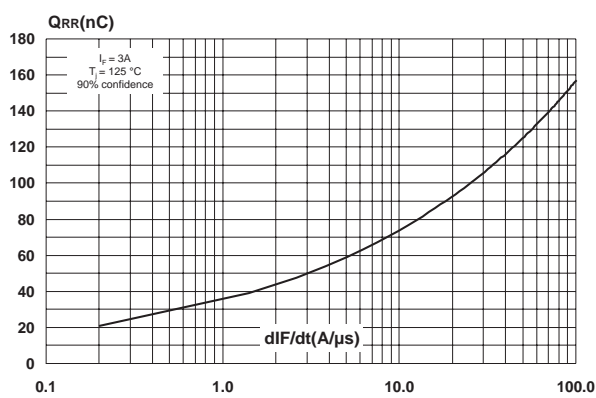


Fig. 7-1: Peak reverse recovery current versus dI_F/dt (damper diode).

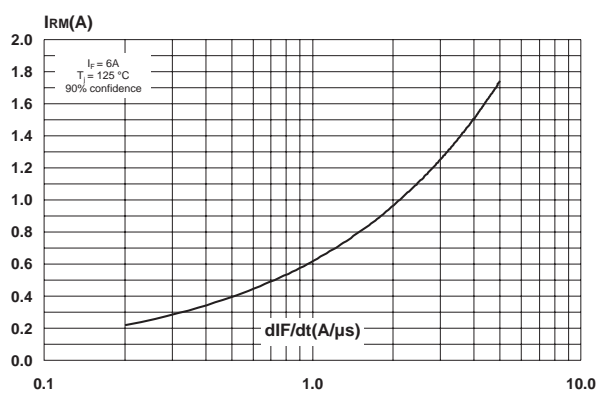


Fig. 7-2: Peak reverse recovery current versus dIF/dt (modulation diode).

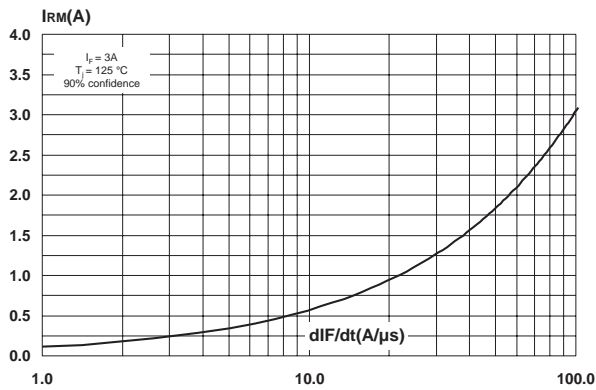


Fig. 8-2: Transient peak forward voltage versus dIF/dt (modulation diode).

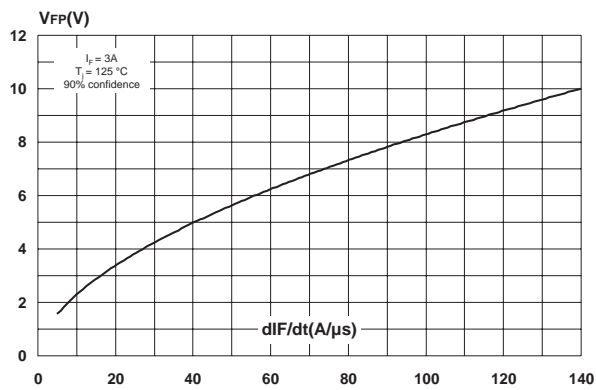


Fig. 9-2: Forward recovery time versus dIF/dt (modulation diode).

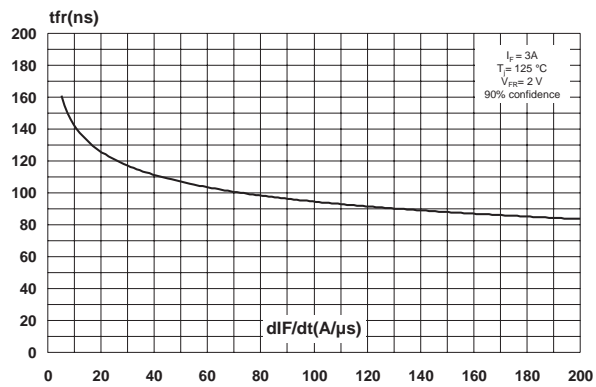


Fig. 8-1: Transient peak forward voltage versus dIF/dt (damper diode).

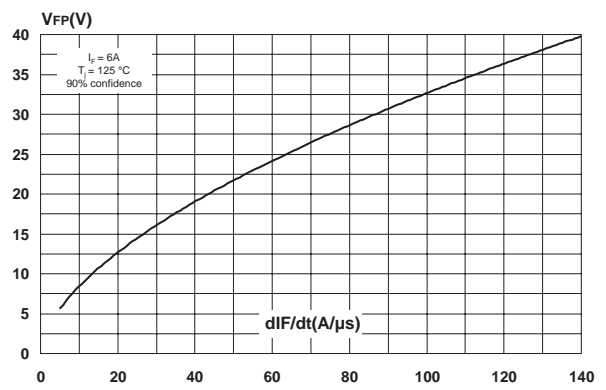


Fig. 9-1: Forward recovery time versus dIF/dt (damper diode).

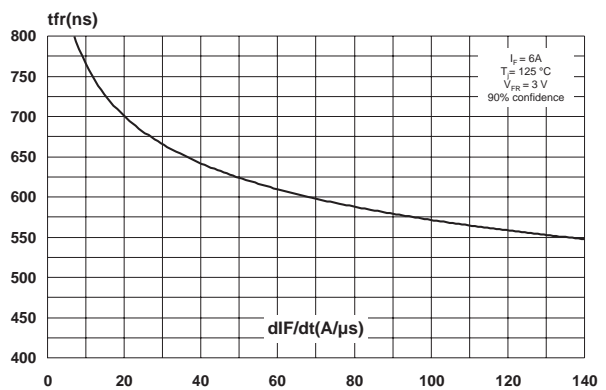


Fig. 10: Relative variations of dynamic parameters versus junction temperature.



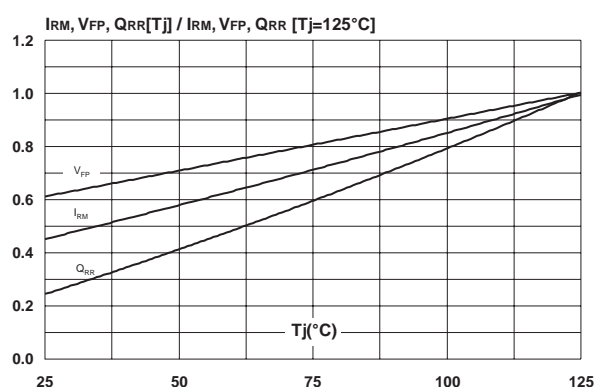


Fig. 11: Junction capacitance versus reverse voltage applied (typical values)

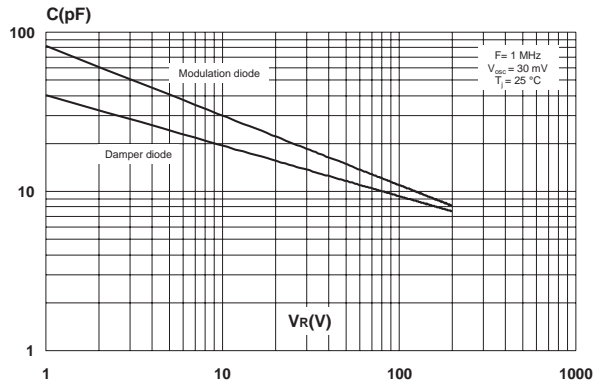


ORDERING INFORMATION

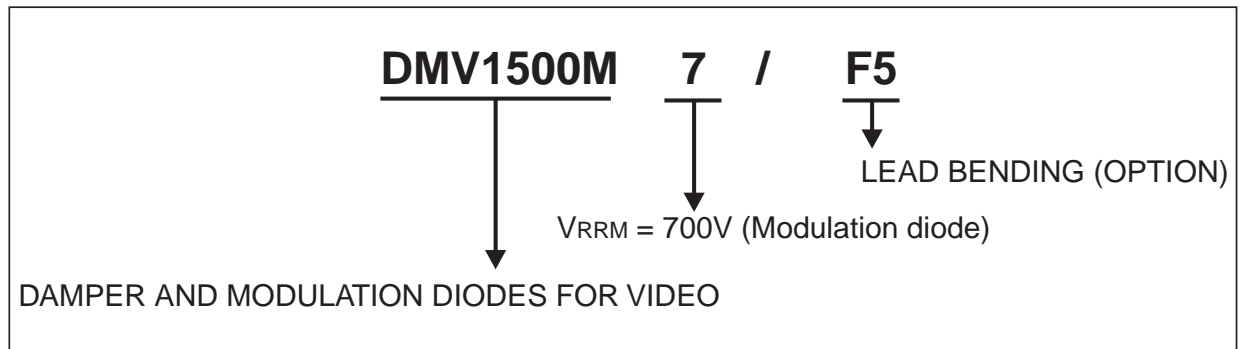


DMV1500M7

PACKAGE MECHANICAL DATA TO-220AB F5 OPTION

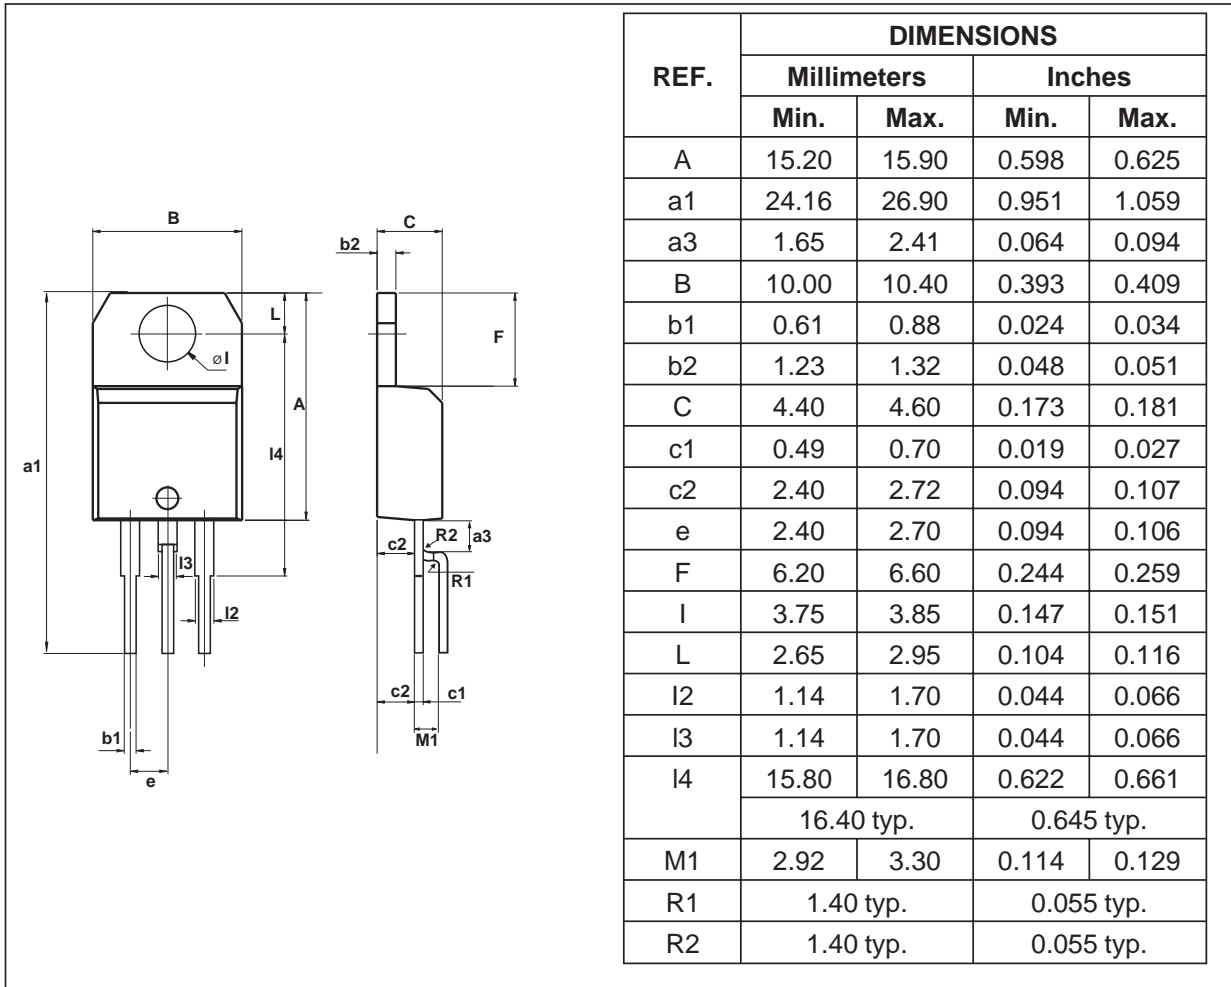

PRINTED CIRCUIT LAYOUT FOR F5 LAYOUT

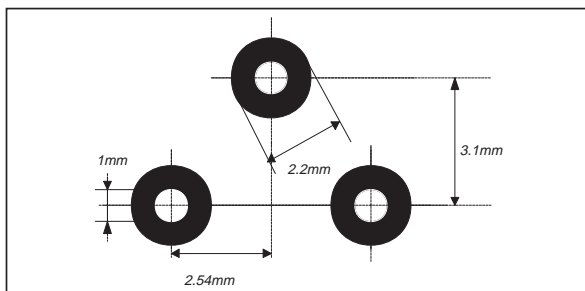

- Cooling method: by conduction (c)
- Recommended torque value: 0.8 m.N.
- Maximum torque value: 1 m.N.

PACKAGE MECHANICAL DATA
 TO-220AB

REF.	DIMENSIONS					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	15.20		15.90	0.598		0.625
a1		3.75			0.147	
a2	13.00		14.00	0.511		0.551
B	10.00		10.40	0.393		0.409
b1	0.61		0.88	0.024		0.034
b2	1.23		1.32	0.048		0.051
C	4.40		4.60	0.173		0.181
c1	0.49		0.70	0.019		0.027
c2	2.40		2.72	0.094		0.107
e	2.40		2.70	0.094		0.106
F	6.20		6.60	0.244		0.259
I	3.75		3.85	0.147		0.151
I4	15.80	16.40	16.80	0.622	0.646	0.661
L	2.65		2.95	0.104		0.116
I2	1.14		1.70	0.044		0.066
I3	1.14		1.70	0.044		0.066
M		2.60			0.102	

- Cooling method: by conduction (c)
- Recommended torque value: 0.8 m.N.
- Maximum torque value: 1 m.N.

Type	Marking	Package	Weight	Base qty	Delivery mode
DMV1500M7 DMV1500M7F5	DMV1500M7	TO-220AB	2.2 g	50	Tube

- Epoxy meets UL94, V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2002 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>