

S3A THRU S3M

SURFACE MOUNT RECTIFIER
VOLTAGE - 50 - 1000 Volts CURRENT - 3.0 Amperes


FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Glass passivated junction
- High temperature soldering:
260°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic
 Terminals: Solder plated solderable per MIL-STD-750, Method 2026
 Polarity: Indicated by cathode band
 Standard Packaging: 16mm tape (EIA-481)
 Weight: 0.007 ounces, 0.21 gram

SMC/DO-214AB

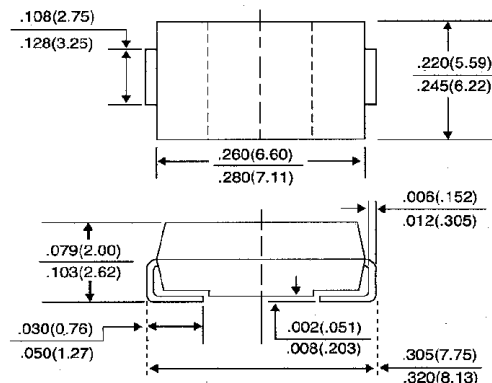

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

	SYMBOLS	S3A	S3B	S3D	S3G	S3J	S3K	S3M	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at T _L = 75°C	I _(AV)	3.0							Amps
Peak forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100.0							Amps
Maximum Instantaneous Forward Voltage at 3.0A	V _F	1.20							Volts
Maximum DC Reverse Current T _A = 25°C at Rated DC Blocking Voltage T _A = 125°C	I _R	5.0 250.0							μA
Typical Reverse Recovery Time (NOTE 1)	T _{RR}	2.5							μs
Typical Junction Capacitance (NOTE 2)	C _J	53							pf
Maximum Thermal Resistance (NOTE 3)	R _{θJL} R _{θJA}	13 47							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150							°C

NOTES:

1. Reverse Recovery Test conditions: I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A.
2. Measured at 1.0 MHz and applied V_r = 4.0 volts.
3. 8.0mm² (.013mm thick) land areas.

RATING AND CHARACTERISTIC CURVES
S3A THRU S3M

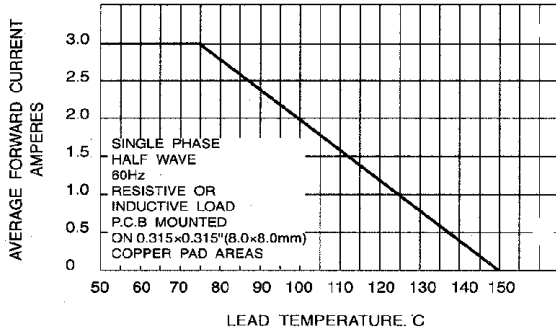


FIG. 1 - FORWARD CURRENT DERATING CURVE

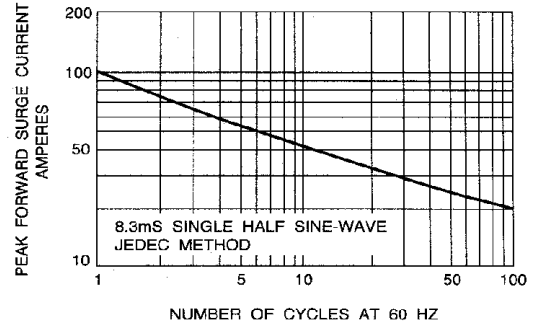


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

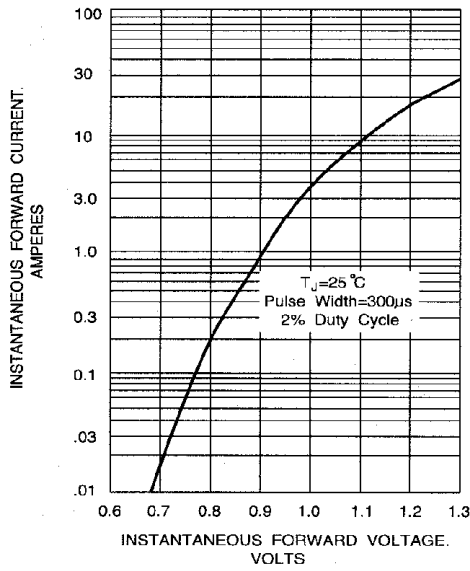


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

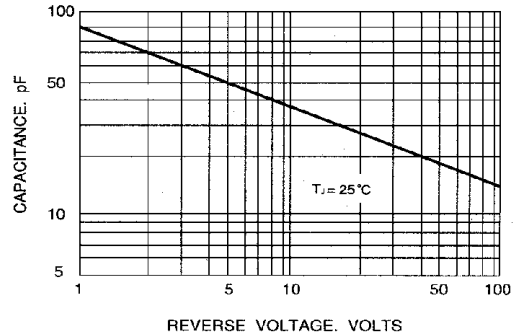


FIG. 4 - TYPICAL JUNCTION CHARACTERISTICS

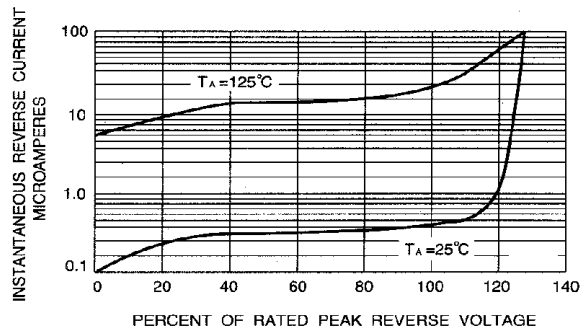


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS