

ER3A THRU ER3J

SURFACE MOUNT SUPERFAST RECTIFIER VOLTAGE - 50 to 600 Volts CURRENT - 3.0 Amperes

FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory

Flammability Classification 94V-O

- Glass passivated junction
- High temperature soldering:
260 /10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AB molded plastic

Terminals: Solder plated, solderable per MIL-STD-750,


Method 2026

Polarity: Indicated by cathode band

Standard packaging: 16mm tape (EIA-481)

Weight: 0.007 ounce, 0.21 gram

SMC/DO-214AB

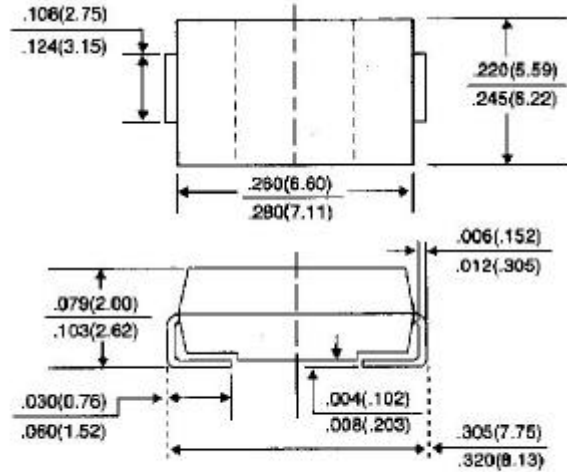

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	SYMBOLS	ER3A	ER3B	ER3C	ER3D	ER3E	ER3G	ER3J	UNITS	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	Volts	
Maximum Average Forward Rectified Current, at $T_L=75$	$I_{(AV)}$	3.0							Amps	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	100							Amps	
Maximum Instantaneous Forward Voltage at 3.0A	V_F	0.95			1.25		1.7		Volts	
Maximum DC Reverse Current $T_A=25$ At Rated DC Blocking Voltage $T_A=100$	I_R	5.0				200				A
Maximum Reverse Recovery (Note 1)	T_{RR}	35.0								nS
Typical Junction capacitance (Note 2)	C_J	45.0								pF
Typical Thermal Resistance (Note 3)	R_{JL}	16								/W
Operating and Storage Temp	T_J, T_{STG}	-50 to +150								

NOTES:

1. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{rr}=0.25A$
2. Measured at 1 MHz and Applied reverse voltage of 4.0 volts
3. $8.0mm^2$ (.013mm thick) land areas

RATING AND CHARACTERISTIC CURVES ER3A THRU ER3J

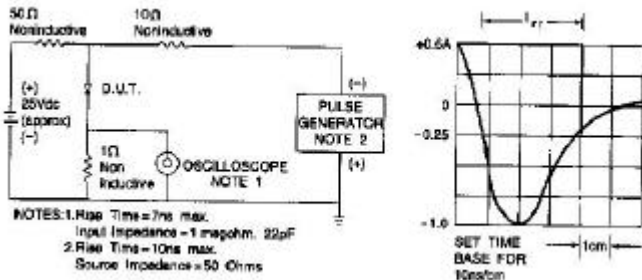


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST DIAGRAM

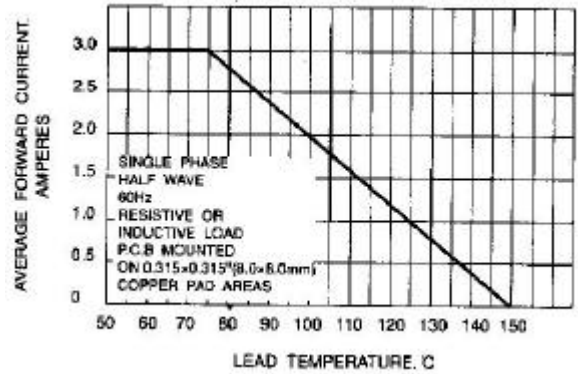


Fig. 2-MAXIMUM AVERAGE FORWARD CURRENT RATING

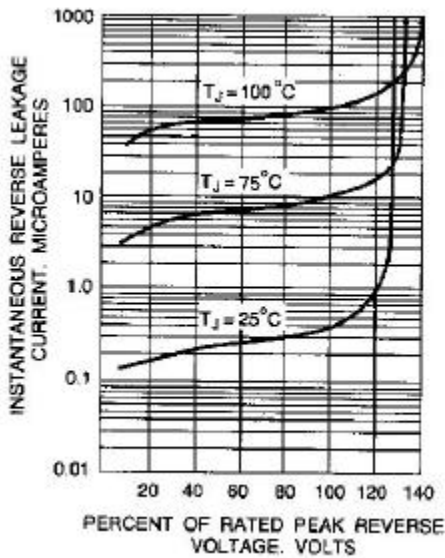


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

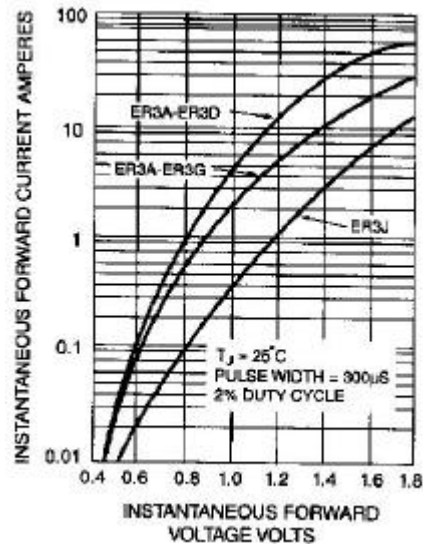


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

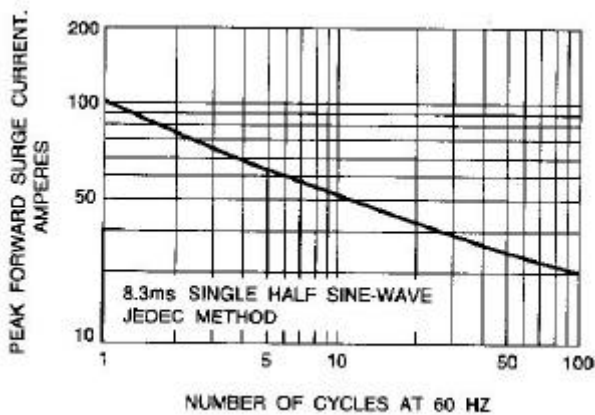


Fig. 5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

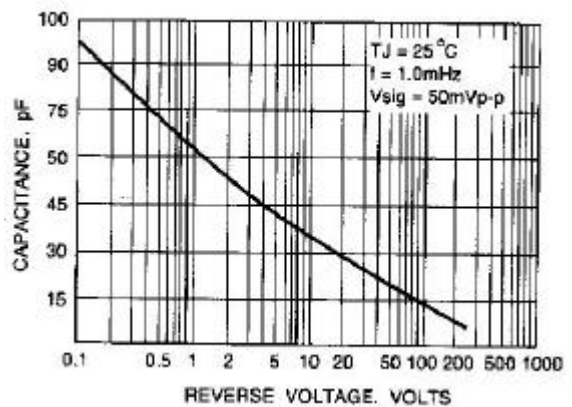


Fig. 6-TYPICAL JUNCTION CAPACITANCE