



# UF100GS THRU UF108GS


GLASS PASSIVATED JUNCTION ULTRAFAST SWITCHING RECTIFIER  
 VOLTAGE - 50 to 800 Volts CURRENT - 1.0 Ampere

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 Utilizing Flame Retardant Epoxy Molding Compound
- Glass passivated junction in A-405 package
- 1.0 ampere operation at  $T_A=55^\circ\text{C}$  with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- Ultra Fast switching for high efficiency

## MECHANICAL DATA

- Case: Molded plastic, A-405
- Terminals: axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Band denotes cathode
- Mounting Position: Any
- Weight: 0.008 ounce, 0.22 gram

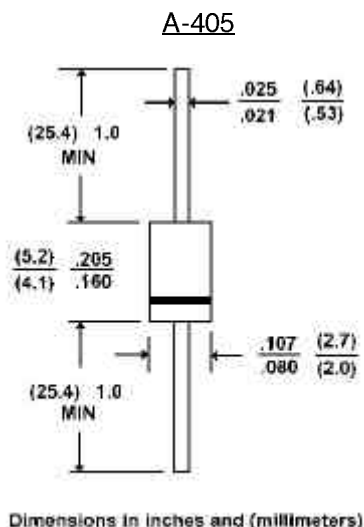

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.


	UF100GS	UF101GS	UF102GS	UF104GS	UF106GS	UF108GS	UNITS
Peak Reverse Voltage, Repetitive; $V_{RM}$ :	50	100	200	400	600	800	V
Maximum RMS Voltage	35	70	140	280	420	560	V
DC Reverse Voltage; $V_R$	50	100	200	400	600	800	V
Average Forward Current, $I_o$ @ $T_A=55^\circ\text{C}$ 3/8" lead length, 60 Hz, resistive or inductive load	1.0						A
Peak Forward Surge Current, $I_{FM}$ (surge) 8.3msec. single half sine wave superimposed on rated load(JEDEC method)	30						A
Maximum Forward Voltage $V_F$ @ 1.0A, $25^\circ\text{C}$	1.00		1.30		1.70		V
Maximum Reverse Current, @ Rated $T_J=25^\circ\text{C}$	10.0						$\mu\text{gA}$
Reverse Voltage $T_J=100^\circ\text{C}$	150						$\mu\text{gA}$
Typical Junction capacitance (Note 1)	17						pF
Typical Junction Resistance (Note 2) $R_{\theta JKJA}$	60.0						$^\circ\text{C/W}$
Reverse Recovery Time $I_F=.5A, I_R=1A, I_{rr}=.25A$	50	50	50	50	100	100	ns
Operating and Storage Temperature Range	-55 to +150						$^\circ\text{C}$

## NOTES:

- Measured at 1 MHz and applied reverse voltage of 4.0 VDC
- Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

RATING AND CHARACTERISTIC CURVES

UF100GS THRU UF108GS

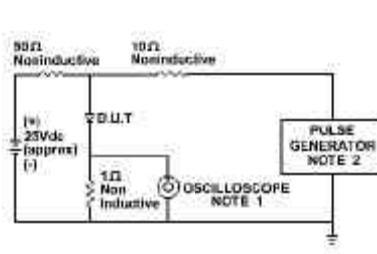

NOTE:1.Rise Time = 7ns max.  
 Input Impedance = 1 megohm. 22pF  
 2.Rise Time = 10ns max.  
 Source Impedance = 50 Ohms

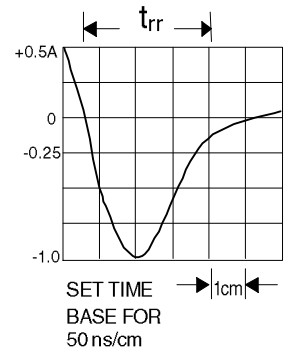


Fig. 1-REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

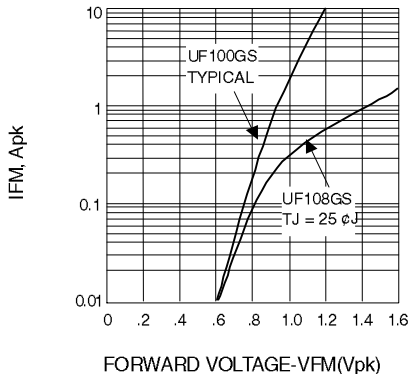


Fig. 2-FORWARD CHARACTERISTICS

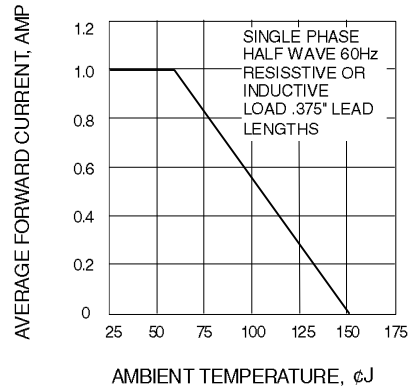


Fig. 3-FORWARD CURRENT DERATING CURVE

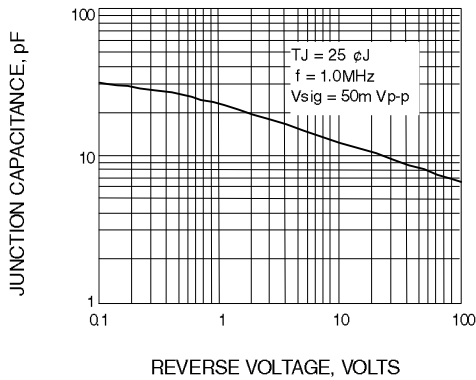


Fig. 4-TYPICAL JUNCTION CAPACITANCE

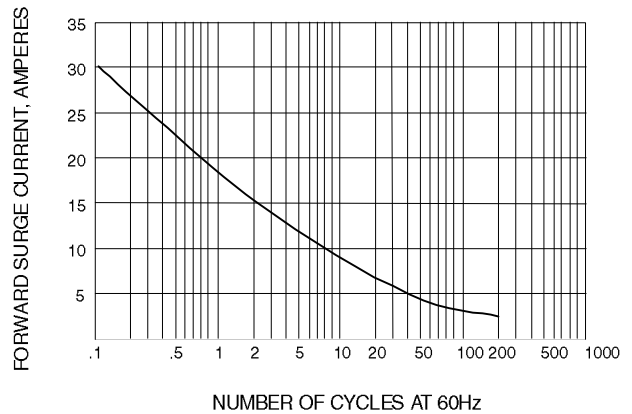


Fig. 5-PEAK FORWARD SURGE CURRENT